

Title	Variable fiber optic attenuator using a bulk-micromachined deformable micromirror
Authors	Mughal, M. Junaid;Riza, Nabeel A.
Publication date	2004-10-01
Original Citation	Mughal, M. J. and Riza, N. A. [2004] 'Variable fiber optic attenuator using a bulk-micromachined deformable micromirror', Optical Engineering 43(10), pp. 2214-2215. doi: 10.1117/1.1786940
Type of publication	Article (peer-reviewed)
Link to publisher's version	10.1117/1.1786940
Rights	© 2004 Society of Photo-Optical Instrumentation Engineers (SPIE). One print or electronic copy may be made for personal use only. Systematic reproduction and distribution, duplication of any material in this paper for a fee or for commercial purposes, or modification of the content of the paper are prohibited.
Download date	2024-04-19 02:13:45
Item downloaded from	https://hdl.handle.net/10468/10141

Variable fiber optic attenuator using a bulk-micromachined deformable micromirror

M. Junaid Mughal

Nabeel A. Riza, FELLOW SPIE

Nuonics Incorporated

1025 South Semoran Boulevard

Suite 1093

Winter Park, Florida 32792

E-mail: nabeel@nuonics.com

Abstract. A compact fiber variable optical attenuator (VOA) with <1 -dB insertion loss and >25 -dB dynamic range is proposed and demonstrated at the 1550-nm band using a fiber collimator lens and a bulk-micromachined deformable micromirror. Three versatile VOA designs are presented that exploit the principle of 3-D beam spoiling to achieve broadband polarization insensitive attenuation using simple single-drive controls. © 2004 Society of Photo-Optical Instrumentation Engineers. [DOI: 10.1117/1.1786940]

Subject terms: variable fiber optic attenuator; bulk machined; micromirror; fiber collimator lens.

Paper 04015 received Feb. 19, 2004; revised manuscript received Jun. 1, 2004; accepted for publication Jun. 11, 2004; appeared online Jun. 17, 2004.

Fiber variable optical attenuators (VOAs) have been previously realized such as liquid crystal,¹ acousto-optic,² and MEMS³ devices. A simple method to implement VOAs uses the concept of optical beam spoiling.⁴ Although single tilt axis⁵ and 3-D mirror control⁶ can realize such a VOA, in this work,⁷ 3-D beam spoiling is implemented via a simple micromachined deformable mirror lens device. The rest of the work describes the basics of the proposed deformable micromirror-based VOAs and their related experi-

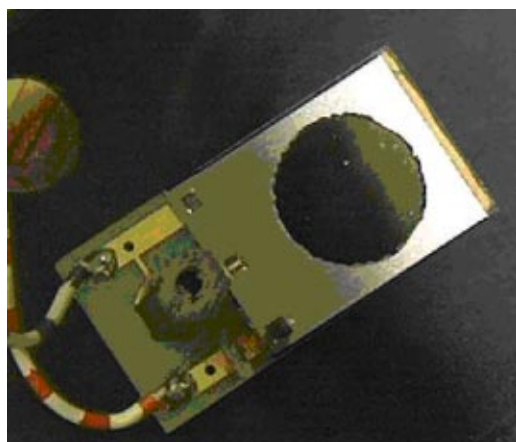


Fig. 1 The micromachined circular deformable mirror with a 10 mm diameter.

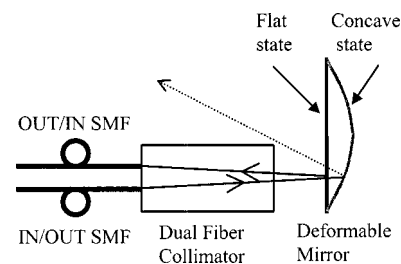


Fig. 2 Compact VOA design with dual fiber collimator and micromachined deformable mirror using the tilt effect.

mental results, indicating the simplicity and versatility of the proposed designs for broadband light attenuation.

The silicon micromachined mirror (from OKO Technology, Holland) used in the demonstrated VOAs is fabricated by using technology of silicon bulk machining.⁸ The mirror consists of a silicon chip mounted over a printed circuit board (PCB) holder. The chip contains a silicon nitride membrane coated with aluminum to form the mirror. The control electrode structure is housed in the PCB. The shape of the reflective membrane is flat with no input voltage applied between the membrane and the control electrodes. When a dc voltage is applied across the electrodes, the membrane changes its shape and becomes concave. The deformable mirror is shown in Fig. 1. In the first VOA design, a dual fiber collimator is used as the input/output port for the VOA. The optical beam from the fiber lens is reflected by the deformable mirror and is coupled into the output port, as shown in Fig. 2. When a dc voltage is applied, the radius of curvature of the mirror membrane changes. This changes the direction of the reflected beam, as shown by the dotted line in Fig. 2, thus reducing the coupling and hence attenuating the input signal. Note that the center of the mirror is not used for reflection/deflection of the beam. This is because the center of the mirror has a focusing effect rather than the needed tilting effect. The focusing effect is used in the high-resolution VOA design presented later. The attenuation curve for the dual fiber collimator VOA is shown in Fig. 3. The static insertion loss of this dual fiber collimator VOA

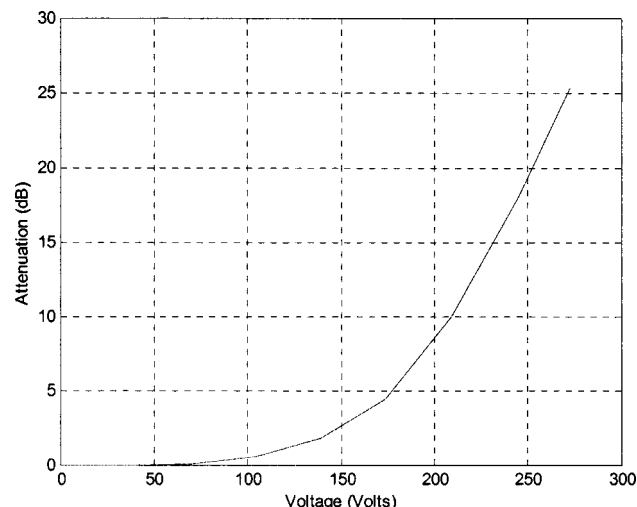


Fig. 3 Measured attenuation at 1550 nm versus the applied voltage for the dual fiber collimator VOA.

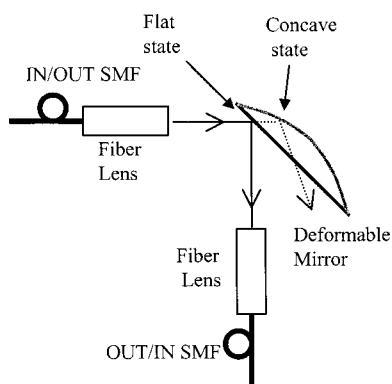


Fig. 4 VOA design using two single fiber lenses.

was measured to be <1 dB. The dynamic range is measured to be >25 dB, and the average resolution is calculated to be 0.09 dB/V. The power consumption of this VOA is low (e.g., in microwatts). Insertion loss measurements are taken with an optical power meter with both free-space and fiber optic adaptors.

Figure 4 shows an alternative design VOA, which uses two fiber collimators lenses. This VOA design is useful if input and output fiber ports must be separately located, as in most switching applications. The total distance between the fiber collimators is kept equal to the self imaging or working distance,⁹ thus giving high coupling efficiency. The static insertion loss of this VOA is measured to be <1 dB. The dynamic range is measured as >20 dB, and the average resolution is calculated to be 0.07 dB/V. The related attenuation curve is shown in Fig. 5.

The two VOA designs presented so far use the tilting and translation effect of the deformable mirror to achieve dynamic attenuation control. In changing from a flat to concave shape, the focal length of the deformable mirror is changed. This focusing effect can be used to change the

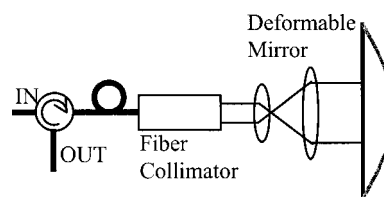


Fig. 6 High resolution VOA design using the focusing effect of the deformable mirror.

working distance of the self-imaging fiber collimator lenses. One application of the focusing effect is exploited in the proposed high-resolution VOA shown in Fig. 6. In this design, a single collimator lens is used as the input and output port of the VOA via an optical circulator. The expanded optical beam is reflected by the mirror and is coupled back into the collimator. The path length for the return signal is kept equal to the working distance of the lens. The focusing characteristic of the deformable mirror is used to change this working distance for the optical beam, hence introducing coupling loss and thereby providing high-resolution (<0.01 dB/V) attenuation control.

In conclusion, the change in the radius of curvature of a deformable mirror is intelligently used to implement 3-D beam spoiling to enable three different VOA designs. Two VOA designs have been successfully built and tested using a traditional telecommunication band 1550-nm center wavelength (i.e., λ). The VOAs demonstrate low polarization dependent loss (<0.1 dB) and low <1 -dB optical insertion loss. Because these VOA designs are alignment and wavefront quality sensitive, the deformable mirror must have good flatness (e.g., $\lambda/20$) over the beam region for low VOA static loss. These VOAs also show good >20 -dB dynamic range numbers, all within simple-to-assemble and control optics and electronics. These bulk-micromachined deformable micromirrors can also be designed to operate over broad visible and near-infrared wavelengths, thus enhancing the proposed VOA's versatility as an electronic adaptive feedback controlled fiber optic variable attenuator.

References

1. K. Hirabayashi, M. Wada, and C. Amano, "Optical-fiber variable-attenuator arrays using polymer-network liquid crystal," *IEEE Photonics Technol. Lett.* **13**(5), 487–489 (May 2001).
2. M. J. Mughal and N. A. Riza, "Compact acousto-optic high speed variable attenuator for high power applications," *IEEE Photonics Technol. Lett.* **14**(4), 510–512 (2002).
3. C. Marxer, P. Griss, and N. F. de Rooij, "A variable optical attenuator based on silicon micromechanics," *IEEE Photonics Technol. Lett.* **11**(2), 233–235 (Feb. 1999).
4. N. A. Riza and N. Madamopoulos, "Synchronous amplitude and time control for an optimum dynamic range variable photonic delay line," *Appl. Opt.* **38**(11), 2309–2318 (Apr. 1999).
5. P. Colbourne, J. Jasvinder, and N. Teitelbaum, "Variable optical attenuator," U.S. Patent No. 5915063 (1999).
6. N. A. Riza and S. Sumriddetchkajorn, "Fault-tolerant variable fiber-optic attenuator using three dimensional beam spoiling," *Opt. Commun.* **185**, 103–108 (2000).
7. M. J. Mughal and N. A. Riza, "Deformable micromirror-based variable fiber-optic attenuator," *NFOEC 2003 Tech. Proc.*, pp. 137–140 (2003).
8. G. Vdovin and P. M. Sarro, "Flexible mirror micromachined in silicon," *Appl. Opt.* **34**(16), 2968–2972 (June 1995).
9. M. van Buren and N. A. Riza, "Foundations for low loss fiber gradient-index lens pair coupling with the self-imaging mechanism," *Appl. Opt.* **42**(3), 550–565 (2003).

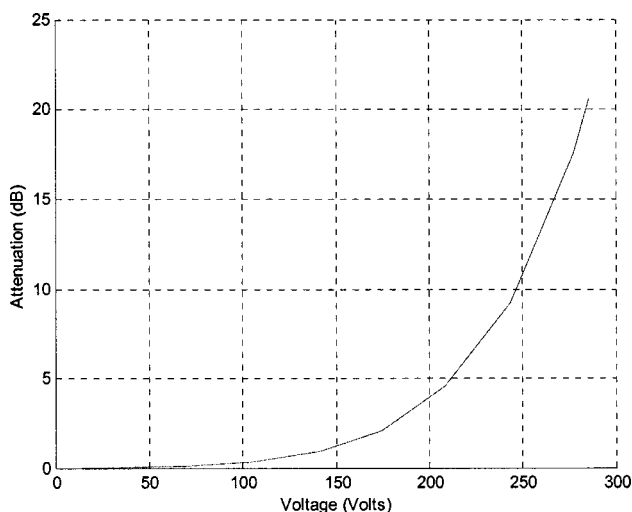


Fig. 5 Measured attenuation at 1550 nm versus the applied voltage for VOA using two fiber collimators.