CORA Cork Open Research Archive
Cartlann Taighde Oscailte Chorcaí

Title	Improving gaseous biofuel production from seaweed Saccharina latissima: the effect of hydrothermal pretreatment on energy efficiency
Authors	Lin, Richen;Deng, Chen;Ding, Lingkan;Bose, Archishman;Murphy, Jerry D.
Publication date	2019-07-08
Original Citation	Lin, R., Deng, C., Ding, L., Bose, A. and Murphy, J. D. (2019) 'Improving gaseous biofuel production from seaweed Saccharina latissima: the effect of hydrothermal pretreatment on energy efficiency', Energy Conversion and Management, 196, pp. 1385-1394. doi: 10.1016/j.enconman.2019.06.044
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://www.sciencedirect.com/science/article/pii/S0196890419307150 - 10.1016/j.enconman.2019.06.044
Rights	© 2019, Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC BY-NC-ND 4.0 license. - https://creativecommons.org/licenses/by-nc-nd/4.0/
Download date	2026-11-06 15:34:48
Item downloaded from	https://hdl.handle.net/10468/8198



UCC
University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

*Revised Manuscript with no changes marked
Click here to view linked References

Improving gaseous biofuel production from seaweed *Saccharina latissima*: the effect of hydrothermal pretreatment on energy efficiency

Richen Lin[a, b], Chen Deng[a, b*], Lingkan Ding[c], Archishman Bose[a, b], Jerry D. Murphy[a, b]

[a] *MaREI Centre, Environmental Research Institute, University College Cork, Cork, Ireland*

[b] *School of Engineering, University College Cork, Cork, Ireland*

[c] *Department of Bioproducts and Biosystems Engineering, University of Minnesota, 1390 Eckles Ave., St. Paul, MN 55108, USA*

* Corresponding author:

Dr. Chen Deng: MaREI Centre, Environmental Research Institute, University College Cork, Ireland. Tel.: +353 (0)21 490 1948. Email: chen.deng@ucc.ie

Abstract

Marine macroalgae (seaweed) is a promising feedstock for producing biohydrogen and biomethane via dark fermentation and anaerobic digestion, respectively. However, one of the limiting steps in the biological process is the conversion of polymeric carbohydrates into monomeric sugars. Here hydrothermal pretreatments were assessed for hydrolysis and subsequent production of biohydrogen and biomethane from the brown seaweed *Saccharina latissima*. The solubilization of *S. latissima* improved with increasing temperatures from 100 to 180 °C, resulting in a maximum yield of 0.70 g soluble chemical oxygen demand/volatile solid (sCOD/g VS); equivalent to an increase of 207.5% compared with untreated seaweed. However, the yield of the derived monomeric sugar mannitol peaked at 140 °C and decreased with increasing temperatures, likely due to production of fermentative inhibitors. Microstructural characterization revealed that the algal structure was significantly damaged, and the major chemical groups of carbohydrates and proteins were weakened after pretreatment. Regardless of hydrothermal temperatures, biohydrogen yield only slightly increased in dark fermentation, while biomethane yield significantly increased from 281.4 (untreated *S. latissima*) to 345.1 mL/g VS (treated at 140 °C), leading to the sCOD removal efficiency of 86.1%.

The maximum energy conversion efficiency of 72.8% was achieved after two-stage biohydrogen and biomethane co-production. In comparison, considering the energy input for pretreatment/fermentation/digestion, the highest process energy efficiency dropped to 37.8%. Further calculations suggest that a significant improvement of efficiency up to 56.9% can be achieved if the heat from pretreatment can be recovered.

Keywords: Macroalgae; hydrothermal pretreatment; energy efficiency; biohydrogen; biomethane.

1. Introduction

In a world concerned with climate change and poor air quality associated with excessive use of non-renewable fossil fuel, biofuels will play an increasingly more significant role in future energy systems [1]. The European Union (EU) encourages the optimization of renewable energy systems to meet more and more stringent sustainability criteria. The EU has introduced a cap on the contribution of food-based biofuels, starting at 7% of energy in the transport sector in 2021 and reducing progressively to 3.8% by 2030 [2]. Third-generation biofuel feedstocks are free from arable land use. These include advanced gaseous biofuels (biomethane and biohydrogen) derived from microalgae and macroalgae (seaweeds), which show significant potential to satisfy advanced biofuel targets [3-8]. The EU target for advanced biofuels has been set at a minimum share of 3.6% of the total fuel consumption by 2030 as compared to the target of just 0.5% for 2021 [2]. The advantages of using algae include for higher growth rates and production yields, higher rate of carbon dioxide fixation, negligible quantities of hemicellulose and lignin, versatile biofuel production and freedom from competition for agricultural land [9].

Biohydrogen and biomethane can be produced through biological technologies such as fermentation and anaerobic digestion, respectively. Seaweeds (including brown, green, and red) grow naturally and are cultivated worldwide. The harvest is greatest in Asian countries (China, Philippines, Japan, Korea). China annually harvests 3.2 million tonnes of seaweeds [4]. In the European context, Ireland is one of the largest seaweed producers, producing 29,500 tonnes per annum [4]. Typical brown seaweeds (such as *Laminaria digitata* and *Saccharina latissima*) and green seaweeds (such as *Ulva lactuca*) are rich in organic matter, including carbohydrates and proteins. Brown seaweeds are relatively high in carbohydrates in the form of polysaccharides (mannitol, laminarin and alginate) which are easily degradable [10]. Some species of green seaweeds may grow faster than brown seaweeds; however green seaweeds contain high levels of proteins, leading to unfavorable low carbon to nitrogen ratios [11]. Seaweeds have the capacity to produce a vast array of high-value liquid (such as bioethanol and biodiesel) and gaseous (such as biohydrogen and biomethane) biofuels [12-14]. It has been reported that gaseous biofuels may have certain advantages over liquid biofuels [9]: (1) the greenhouse gas (GHG) savings in producing and using gaseous biofuels is greater than that for liquid

65 biofuels; (2) the pollutant emissions using gaseous biofuels as transport fuels are much less than that
66 using liquid biofuels; and (3) gaseous biofuels can take advantage of the existing natural gas grid
67 system for low energy input distribution.

68 Polymeric carbohydrates are the most important components in seaweeds for gaseous biofuel
69 production employing biological processes. The main groups of carbohydrates found in seaweeds are
70 laminarin, alginate, cellulose, fucoidan, and sugar alcohol mannitol [15]. Biohydrogen and biomethane
71 can be produced through biological technologies via fermentation and anaerobic digestion,
72 respectively. However, the rigid cell wall structure and high molecular weight organics in seaweeds
73 may adversely affect cell disintegration and prolong fermentation time. Allen et al. assessed ten
74 species of seaweeds for biomethane potential, and found that some species (such as *Ascophyllum*
75 *nodosum and Fucus serratus*) exhibited biodegradability indices as low as 0.19−0.34 [16]; as such 66 to
76 81% of volatile material did not degrade during digestion over 30 days. Similar to lignocellulosic
77 feedstock, seaweeds in fermentation and anaerobic digestion require firstly the conversion of
78 polymeric carbohydrates into readily available monomeric sugars (such as glucose and mannitol). The
79 carbohydrate monomers derived from land-based biomass are dominating by glucose and xylose;
80 biohydrogen and biomethane produced from these carbohydrates have been extensively investigated
81 [17-20]. However, the use of seaweeds as feedstock and their fermentation performance have
82 received less attention, especially in two-stage fermentation systems for co-production of biohydrogen
83 and biomethane.

84 In order to convert polymeric carbohydrates to monosugars efficiently, an effective pretreatment
85 process prior to fermentation and anaerobic digestion is necessary. To date, different pretreatment
86 methods have been developed, including mechanical, chemical, thermal, and biological methods
87 [21-27]. However, factors that influence pretreatment efficiency and, consequently, biofuel yields, are
88 highly affected by seaweed composition (such as salts, polyphenols, polysaccharides type) [28]. Hu et
89 al. found the different acids (such as H_2SO_4, HCl, H_3PO_4) can effectively damage the dense surface of
90 algae and remove a small portion of protein and sulfate polysaccharide in seaweed *Enteromorpha* [29].
91 The thermal pretreatment of brown seaweed *Nizimuddinia zanardini* released more than 80% of
92 components such as mannitol and led to a 22% higher methane yield compared to untreated seaweed
93 [30]. Among those methods, mild acid treatment using sulfuric or hydrochloric acid was found to be

effective in hydrolysis of polysaccharides in seaweeds at relatively low temperatures. Acid is able to cleave the β-1-4-glycosidic bond of complex polysaccharides to associated monomers. Monosugars derived from hydrolysis can be readily used by acidogenic bacteria and methanogenic archaea for sequential biohydrogen and biomethane production. Yin et al. reported that the solubilization of *Laminaria japonica* increased 1.9 fold after microwave pretreatment in the presence of 1% sulfuric acid, thereby improving the sequential biohydrogen production from 15 to 28 mL/g dry weight [31]. However, the use of acid in pretreatment may inevitably lead to formation of fermentative inhibitors (such as furfural, and levulinic acid) as a consequence of sugar decomposition. Furthermore, alkaline addition is typically necessary in order to balance the pH value of the pretreated solution before biological processes. Jung et al. reported a negative correlation between hydrogen yield and the produced 5-(hydroxymethyl)furfural in hydrolysate [32]. The presence of furfural (15 mM) reduced the biohydrogen production rate by 28.9%, likely due to the competitive reduction reaction converting furfural aldehyde to alcohol, inhibiting the reaction of protons to hydrogen [33].

As an eco-friendly alternative, hydrothermal pretreatment may be applied to seaweeds to improve hydrolysis and increase the biodegradability index in fermentation and digestion. Hydrothermal pretreatment has been used for the fractionation of macroalgae biomass. The excellent solvent properties of water as a reaction medium and the high moisture content of macroalgal biomass make this technology promising for the direct use of algae in the production of biofuels and high added-value compounds [34]. For hydrothermal pretreatment, liquid hot water is used at temperatures from 100 to 374 °C under high pressure, corresponding to conditions below the water critical point [35]. The high hydrothermal temperatures can weaken H-bonding in water, allowing for autoionization of water into acidic hydronium ions (H_3O^+) and basic hydroxide ions (OH^-) [7]. Acidic hydronium ions can act as catalysts that may facilitate the hydrolysis of biomass. Despite the advantages of hydrothermal pretreatments, some drawbacks may still present, particularly when employing high temperatures. For instance, Jard et al. investigated the effect of thermochemical pretreatment on the solubilization and anaerobic biodegradability of the red macroalgae *Palmaria palmata*, and found that higher temperatures resulted in a substantial decrease in methane potential (−13% at 160 °C and 180 °C, up to −31% at 200 °C) [36].

A previous study suggested that *S. latissima* has the highest specific methane yield of seaweeds

123 available in Ireland [16]. The potential energy yield from *S. latissima* may be up to 365 GJ ha^{-1} yr^{-1} [16];
124 this further leads to the calculation that at least 6124 ha of coastal area would be required to grow
125 seaweed to satisfy Ireland's 2020 target in advanced biofuels [4]. Minimisation of coastal area used is
126 dependent on innovations in cultivation and harvesting of seaweed, but in terms of this paper more
127 significantly in terms of increasing biofuel yield per unit of seaweed and optimisation of energy
128 efficiency in the overarching bioenergy systems. Therefore, *S. latissima* was selected as the feedstock
129 for further assessment in this study. To the best of our knowledge, there is a clear research gap on the
130 use of hydrothermal pretreatment of brown seaweed (in this case *S. latissima*) for two-stage
131 biohydrogen and biomethane production. Studies of such systems are very rare in the scientific
132 literature. The research output can provide an answer as to how energy-efficient hydrothermal
133 pretreatment is in terms of improving gaseous biofuel production from *S. latissima*. The objectives of
134 this study are to: assess the effect of hydrothermal pretreatment on the physicochemical properties of
135 *S. latissima*; evaluate the biohydrogen and biomethane potential from pretreated *S. latissima*; and
136 assess the energy feasibility of the cascading two-stage fermentation system by calculating energy
137 conversion efficiency and energy process efficiency.
138

139 # 2. Materials and Methods

140 ## 2.1. Feedstock and inocula

141 ***Feedstock*:** *S. latissima* was harvested in June in West Cork, Ireland. The collected algal samples
142 were washed with tap water to remove sands and other impurities, and then cut to a particle size of
143 approximately 5 mm by a mincer (Buffalo Heavy Duty Mincer CD400). The samples were then dried at
144 105 °C in an oven and pulverized to 0.02 mm mesh size. The pulverized samples were stored at 4 °C
145 before use. The physicochemical characteristics of dried biomass are presented in Table 1.
146 ***Inoculum for hydrogen fermentation*:** Mixed fermentative bacteria used in biohydrogen potential
147 (BHP) assays were originally sourced from a biogas plant treating pig slurry, dairy slurry and food
148 waste at mesophilic temperatures. The digestate from the biogas plant was prepared by passing
149 through a 1 mm sieve and was degassed for two weeks under anaerobic conditions to reduce any
150 residual gas production. The digestate was then stored in a laboratory digester, and was fed cellulose

as a substrate to maintain the microbial activity. The obtained digestate was heat-treated at 100 °C for 30 min in an autoclave (Sanyo MLS-3780, Japan) to deactivate methanogenic microorganisms. Subsequently, the pre-heated sludge was cultured in an anaerobic environment to enrich hydrogen-producing bacteria. The composition of the culture medium used was as follows (per liter): glucose, 20.0 g; tryptone, 3.0 g; yeast extract, 1.0 g; NaCl, 3.0 g; K_2HPO4, 2.5 g; $MgCl_2$, 0.1 g; $FeCl_2$, 0.1 g; L-cysteine, 0.5 g; vitamin solution, 10.0 mL; and trace element solution, 10.0 mL. The acclimatization procedure was repeated three times to ensure hydrogen-producing bacteria were fully activated.

***Inoculum for anaerobic digestion*:** The inoculum for the biomethane potential (BMP) assays was sourced from the laboratory digester, which was run at mesophilic temperature using cellulose as a substrate. Large particles in the original inoculum were removed through a 1 mm sieve. Prior to the BMP experiments, the sieved inoculum was degassed for two weeks.

2.2. Hydrothermal pretreatment

Fig. 1 presents the experimental schematic including hydrothermal pretreatment, dark hydrogen fermentation and anaerobic digestion. The hydrothermal pretreatment of *S. latissima* biomass was performed in a 500 mL batch reactor (Parr Instrument Company 4500, USA). The pretreatments were carried out under a stirring speed of 500 rpm for 30 min at 100, 120, 140, 160, and 180 °C. Our previous studies have demonstrated that the optimal pretreatment conditions for a wide range of feedstock (such as grass silage, cassava residue and food waste) were in the processing temperature of 135–140 °C and time of 15–20 min [1, 2]. Deng et al. found that the optimal acid pretreatment was achieved at 135 °C for 15 min with a total reducing sugar yield of 0.33 g/g VS of grass silage [37]. When using food waste as feedstock, the optimal hydrothermal pretreatment condition was found to be 140 °C for 20 min in terms of the solubilization efficiency of organic components (namely carbohydrates and proteins) [38]. As compared to pretreatment time, hydrothermal temperature plays a more significant role in affecting the effectiveness of feedstock hydrolysis. Based on the results from the above studies, this study chose the temperature range from 100 to 180 °C and process time of 30 min.

In each run, 7.5 g volatile solid (VS) of *S. latissima* biomass was brought to the reactor along with a volume of 250 mL deionized water. The pretreatment time was precisely measured, starting from when the algal sample reached the set temperature. After each run, the reactor was allowed to cool down to room temperature and the treated samples were taken out for further processing.

2.3. Two-stage dark fermentation and anaerobic digestion

***Dark hydrogen fermentation*:** The cascading fermentation system included two stages, namely, dark hydrogen fermentation followed by anaerobic digestion. The first stage dark fermentation for BHP assays was carried out in duplicate in the AMPTS II system (Bioprocess Control, Sweden). To analyse the effects of hydrothermal temperature on fermentative hydrogen production, five experimental groups were performed based on the hydrothermal conditions (100, 120, 140, 160, and 180 °C). Untreated *S. latissima* biomass was used as a comparison group. In BHP assays, 3 g VS of algal hydrolysates were added into each glass fermenter. Subsequently, 30 mL of activated inoculum for dark fermentation was added to each fermenter. The total liquor volume was then adjusted to 300 mL with deionized water. The initial pH was adjusted to 6.5 ± 0.1 with 6 M NaOH and 6 M HCl solutions. The bottles were sealed and purged with nitrogen gas for 5 min to ensure anaerobic conditions. The bottles were then placed in a water bath at 35.0 °C and the dark hydrogen fermentation lasted for 48 h.

***Anaerobic digestion*:** After dark fermentation for 48 h, the effluents from each bottle were inoculated with seed inoculum at an inoculum to substrate VS ratio of 2:1 (based on original VS before dark fermentation) for second-stage anaerobic digestion. The bottles were also sealed, purged with nitrogen gas for 5 min, and placed in a water bath at 35.0 °C. The anaerobic digestion trials ran for 11 days to allow for maximum degradation of substrates. During dark fermentation and anaerobic digestion, carbon dioxide in the produced gas was removed by passing the biogas through a 3 M NaOH solution. The gas flow was measured, and the volume was automatically normalized to standard conditions (0 °C, 1 atm) and zero moisture content by the AMPST II system.

2.4. Analytic methods

The differences of algal biomass surface microstructures before and after pretreatment were observed by a field emission Scanning Electron Microscope (SEM; Hitachi S3700, Japan). The biomass samples were processed by coating with a thin layer of gold under vacuum before the SEM observation. The changes in chemical composition and functional groups were assessed by a Fourier Transform Infrared Spectroscopy analyser (FTIR; Nicolet 5700, USA) equipped with a universal attenuated total reflection accessory. The total solid (TS), VS and ash content of the inoculum were analyzed by using the standard method of drying of the sample for 24 h at 105 °C and subsequent heating for 2 h at 550 °C [39]. A spectrophotometer (Hach DR890, USA) coupled with a Hach DRB200 reactor was employed to determine the chemical oxygen demand (COD) of algal samples. The concentration of soluble metabolic products (SMPs; such as acetic acid and butyric acid) was analyzed on a gas chromatography system (GC; Agilent 7820A, USA) equipped with a flame ionization detector and a DB-FFAP column. The temperatures of the injection port and the flame ionization detector were both set at 250 °C. The initial column temperature was set at 100 °C, increased to 200 °C at a heating rate of 10 °C/min, and then held for 2.5 min. Before injecting to the GC, the liquid samples were first centrifuged at 5000 rpm for 5 min and then adjusted with hydrochloric acid to ensure an acidic pH. The quantification of each component was determined by comparing with a standard SMP solution. The concentrations of mannitol, glucose, xylose, galactose, and arabinose were determined on a high-performance liquid chromatography (HPLC) system (Agilent 1200, USA) using refractive index detector and Aminex HPX-87P column at 85 °C with H_2O as mobile phase at 1 mm/min.

The severity factor of the hydrothermal pretreatment under different conditions was calculated based on Eq. 1 [40]. Severity factor is an expression of the combined effect of temperature and time of the hydrothermal pretreatment.

$$Severity\ factor = log\ (t \times e^{\frac{T-100}{14.75}}) \quad \text{(Eq. 1)}$$

where t is the time of the hydrothermal pretreatment in min and T is the temperature of the pretreatment in °C. For each pretreatment condition, the severity factor was determined as 1.48 (100 °C, 30 min), 2.07 (120 °C, 30 min), 2.65 (140 °C, 30 min), 3.24 (160 °C, 30 min), and 3.83 (180 °C, 30 min).

The biodegradability index (BI) was defined as the ratio of actual methane yield in batch trial to the calculated theoretical methane yield. The theoretical methane yield was calculated using the Buswell equation on the basis of elemental C, H, O and N content. Biomethane yield was simulated by the modified Gompertz equation as described in Eq. 2. The derived kinetic parameters (H_m, maximum methane yield potential, mL/g VS; R_m, peak methane production rate, mL/g VS/d; and λ, lag-phase time of methane production, d) were calculated using Origin 8.5 software.

$$H = H_m exp\left\{-exp\left[\frac{R_m e}{H_m}(\lambda - t) + 1\right]\right\} \quad \text{(Eq. 2)}$$

2.5. Energy balance

Process energy input: The process energy input involved in the cascading system comprises includes for hydrothermal pretreatment, dark fermentation and anaerobic digestion. The total energy needed (Q_{in}; kJ/g fresh weight) can be estimated as per Eq. 3 [41]:

$$Q_{in} = Q_{Htpt} + Q_{Fer} + Q_{AD} \quad \text{(Eq. 3)}$$

Where Q_{Htpt} is the energy input for hydrothermal pretreatment, Q_{Fer} is the energy input for fermentation, and Q_{AD} is the energy input for anaerobic digestion.

The energy input in each step can be determined using Eq. 4:

$$Q_{Htpt}/Q_{Fer}/Q_{AD} = (V_{reac}\rho_w Cp_w + m_{s,fresh}Cp_{s,fresh}) \times (T_{reac} - T_{amb})/m_{s,fresh} \quad \text{(Eq. 4)}$$

Where the liquid fraction in the reactor (V_{reac}) is assumed to be water with a specific heat (Cp_w) of 4.2 kJ/kg·K. The hydrothermal pretreatment temperature (T_{reac}) varies based on each experimental run, while the ambient temperature (T_{amb}) is assumed as 25 °C. The temperature of dark fermentation and anaerobic digestion is 35 °C as per the experimental conditions. The $m_{s,fresh}$ is the fresh weight of *S. latissma* fed into the reactor, and $Cp_{s,fresh}$ is the corresponding specific heat based on the fresh mass. The specific heat of fresh *S. latissima* is averaged from the data presented for three seaweed species by Wang et al. over different temperatures [42]. No change in the heat capacity with pretreatment or fermentation is assumed. Minimum loss in mass between the different stages is neglected [41].

Process energy efficiency and energy conversion efficiency: The process energy out is associated with the energy yield of hydrogen and methane produced in dark fermentation and anaerobic digestion; and can be estimated specific to the input substrate as per Eq. 5 & 6 [43]:

$$E_{H_2} = V_{H_2,VS} \times LHV_{H_2} \quad \text{(Eq. 5)}$$

$$E_{CH_4} = V_{CH_4,VS} \times LHV_{CH_4} \quad \text{(Eq. 6)}$$

$V_{H_2,VS}$ and $V_{CH_4,VS}$ is the volumetric yields of hydrogen and methane per unit VS substrate used, respectively.

The energy conversion efficiency (η_{ece}) is defined as the ratio of the heating value in hydrogen and methane to the total heating value of the added substrate. Calculations are conducted based on the lower heating values (LHV) of hydrogen (242 kJ/mol) and methane (801 kJ/mol) [44].

$$\eta_{ece} = (E_{H_2} + E_{CH_4})/E_{algae} \times 100 \quad \text{(Eq. 7)}$$

The energy value of algal biomass is calculated based on the modified Dulong Formula as shown in Eq. 8 [45]:

$$E_{algae} = 337C + 1419(H - 0.125O) + 23.26N \quad \text{(Eq. 8)}$$

where C, H, O, and N represent the weight percentages of each element in total VS.

In contrast, taking into account the energy input in relation to hydrothermal pretreatment, dark fermentation and anaerobic digestion, the overall process efficiency (η_{pe}) can hence be represented based on Eq. 9:

$$\eta_{pe} = (E_{H_2} + E_{CH_4} + Q_{recov})/(Q_{Htpt} + Q_{Fer} + Q_{AD} + E_{algae}) \times 100 \quad \text{(Eq. 9)}$$

In which Q_{recov} is the potential heat recovered from hydrothermal pretreatment (this becomes 0 as per the experimental set-up). The potential heat recovery was evaluated considering cool-down of the hydrolysates from process temperatures to 50 °C with an efficiency of heat transfer of 90% [46, 47]. As per the batch experimental set-up, no heat was recovered. However, due to the operation at elevated temperatures, cooling down of the pretreated algal hydrolysates can provide an interesting opportunity for heat recovery with subsequent use in providing heat for fermentation and anaerobic digestion.

3. Results and discussion

3.1. *Saccharina latissima* characterization before and after hydrothermal pretreatment

S. latissima primarily contains a high amount of carbohydrates (such as mannitol, alginate,

laminarin, low concentration of cellulose and negligible lignin), the content which varies significantly with seasons [48]. As a structural component of the cell wall, alginate is the most abundant carbohydrate and may account for 40% of dry weight in some species; structural cellulose has been reported at concentrations of approximately 10% of dry weight; the storage carbohydrates (including laminarin and mannitol) vary considerably between 5–32% and 2–25% of dry weight, respectively [48, 49].

Table 1 presents the compositions of dried seaweed *S. latissima* used in this study. The ultimate analysis showed that the energy value of *S. latissima* was 17.1 kJ/g VS, which is comparable to that of monosaccharide (for example glucose with an energy value of 15.6 kJ/g VS). *S. latissima* used in this study presents a carbon to nitrogen ratio of 14.3. However, large variations were observed in carbon to nitrogen ratios depending on the harvest seasons and locations [16, 50]. As a brown seaweed *S. latissima* is rich in carbohydrate mannitol, which is a sugar alcohol with a variety of applications [51]. Mannitol can be readily used by microorganisms to produce biofuels. Typical amino acids derived from proteins in *S. latissima* include glutamic acid, aspartic acid, and glycine [15]. The fermentable sugars and amino acids are originally in the form of slowly biodegradable high-weight molecular polysaccharides. To improve biofuel production, it is beneficial to pretreat to effectively release monomers from *S. latissima*.

SEM images of untreated and pretreated *S. latissima* biomass with different magnification are shown in the supplementary material (Fig. S1). Hydrothermal pretreatment had a critical impact on the surface morphology of seaweed. The untreated *S. latissima* biomass showed a flat surface with sharp edges and some cracks (Fig. S1 a and b). The surface of hydrothermally treated seaweed was observed to be more uneven and eroded (Fig. S1 c and d). The algal structure was loosened and formed a rugged surface; more internal structure of the samples was exposed. With more ridges and grooves formed, the roughness of the algal surface increased greatly. The damaged surface structure could facilitate diffusion of the hydrolytic enzymes and the degradation of algae by methanogenic archaea.

Fig. 2 shows the FTIR spectra of *S. latissima* biomass before and after hydrothermal pretreatment, which exhibits similar peaks at different wave numbers. This is because the process of hydrothermal pretreatment does not introduce new chemical groups to the solid fraction of seaweed after

pretreatment, due to the fact that only water is used during pretreatment. It indicates that there are two absorption peaks existing in the hydrogen bonding area ranging from 2500 to 4000 cm^{-1}. The major peak located at 3454 cm^{-1} is assigned to the stretching vibrations of hydrogen bonded O−H groups and N−H groups, indicating the presence of carbohydrates and proteins in *S. latissima* biomass [52]. The weak peak at 2923 cm^{-1} is derived from the vibration of C−H group in the polysaccharides in the *S. latissima* biomass. The peak at 1640 cm^{-1} is assigned to the C=O group of amides [53], which arises due to the presence of proteins. The peak around 1415 cm^{-1} may attribute to the C−C stretching vibration of aromatic structure [54]. The peak at 1058 cm^{-1} is characteristic of the C−N stretching vibration of aliphatic amines [55], which confirms the presence of proteins.

As shown in the FTIR spectra, raw seaweed had strong stretching vibration peaks related to the O−H and N−H groups (3454 cm^{-1}), while these absorption intensities decreased in the pretreated seaweed, suggesting decomposition of carbohydrates and proteins. In a similar trend, the vibration peaks corresponding to the C−H and C−C groups (2923 and 1415 cm^{-1}) also decreased, which was due to hydrolysis of polysaccharide substances after hydrothermal pretreatment. The decrease of C=O and C−N vibration peaks (1640 and 1058 cm^{-1}) further confirmed the degradation of proteins in treated seaweed.

The complex structural components of *S. latissima* can be partially transformed from water-insoluble fraction (macromolecular polymers) to water-soluble fraction (low molecular weight organics), thereby increasing the soluble COD production during hydrothermal pretreatment. Fig. 3 a presents the soluble COD yield from *S. latissima* after pretreatment at different temperatures. The untreated seaweed contained a certain amount of soluble organics, which resulted in a yield of 0.23 g sCOD/g VS. By increasing the hydrothermal temperature to 180 °C, the COD yield significantly increased with the highest value of 0.70 g sCOD/g VS (equivalent to an increase of 207.5%). This significant increase in soluble COD production indicates that hydrothermal pretreatment could significantly promote the solubilization of *S. latissima*.

However, the monomer sugars (such as mannitol and glucose) may be further degraded to inhibitory by-products (such as furfural and levulinic acid), especially at high hydrothermal temperatures. Fig. 3 b shows the mannitol yield from *S. latissima* at varying temperatures. The mannitol yield from raw *S. latissima* was 17.8 mg/g VS. With increasing temperature from 100 °C to

140 °C, the mannitol yield increased from 23.0 to 32.2 mg/g VS. Further increasing temperature led to decreased mannitol yield with the lowest yield of 21.8 mg/g VS obtained at 180 °C. The decrease in mannitol yield was ascribed to the fact that higher hydrothermal temperatures favoured the degradation of mannitol to inhibitory by-products. This phenomenon has been previously observed when pretreating other substrates (such as trehalose) [56].

3.2. First-stage dark fermentation for hydrogen production

The solubilized *S. latissima* biomass under different hydrothermal conditions were subject to first-stage dark hydrogen fermentation, as shown in Fig. 4. The biohydrogen yield from untreated seaweed was obtained as 11.7 mL/g VS after fermentation of 48 h. The pretreatment at 100 °C slightly increased the biohydrogen yield to 13.7 mL/g VS. Further increasing the temperature resulted in the decrease in biohydrogen yield; this decrease in yield is postulated to be due to the decreased concentration of monosaccharides (such as mannitol) and the presence of potential inhibitors. This result suggests that the seaweed *S. latissima* may not be a good candidate to produce hydrogen through dark fermentation. As a major monosaccharide derived from *S. latissima*, mannitol has been previously investigated for biohydrogen production [57-59]. The theoretical hydrogen yield from mannitol was calculated as 615.4 mL/g mannitol following the acetate pathway (see Eq. 10). The practical hydrogen production from mannitol achieved ranged from 209.2 to 224.2 mL/g [57-59]. This suggests the efficiency of hydrogen production is less than 40%. Comparatively, the theoretical hydrogen yield from glucose was determined as 498.0 mL/g glucose (see Eq. 11). Previous studies have achieved hydrogen production efficiencies of up to 90% [57].

Mannitol: $C_6H_{14}O_6 + 4H_2O = 2CH_3COO^- + 4H^+ + 2HCO_3^- + 5H_2$, $\Delta G'_0 = -180.6$ kJ/mol (Eq. 10)

Glucose: $C_6H_{12}O_6 + 2H_2O = 2CH_3COO^- + 2HCO_3^- + 4H_2$, $\Delta G'_0 = -215.7$ kJ/mol (Eq. 11)

Where $\Delta G'_0$ as indicated in Eq. 10 and 11 is the free energy change under the standard condition. The free energy change of glucose reaction (−215.7 kJ/mol) is more negative than that of mannitol reaction (−180.6 kJ/mol), suggesting that the fermentative metabolism of glucose is thermodynamically more favourable than that of mannitol. This result implies that fermentative bacteria thermodynamically prefer to consume glucose as compare to mannitol, which thereby

provides a clue as to why mannitol resulted in a less efficient hydrogen production.

Table 2 presents the SMPs profile after dark hydrogen fermentation of *S. latissima* biomass. SMPs primarily consisted of acetate, butyrate, and small amounts of propionate, iso-butyrate, valerate, iso-valerate and caproate. The untreated *S. latissima* yielded SMPs of 5.73 g/L, of which the sum of acetate and butyrate comprised 86.0% of total SMPs. This indicates that the degradation of mannitol mainly followed the acetate and butyrate pathways during hydrogen fermentation, as shown in Fig. 5. The pretreated *S. latissima* exhibited similar levels of SMP production, which is in accordance with the minor change of hydrogen production after pretreatment. No significant change on the metabolic pathways was observed using pretreated seaweed as the substrate, as acetate and butyrate were still the dominant SMPs, comprising 82–90% of total SMPs.

3.3. Second-stage anaerobic digestion for methane production

The hydrogenogenic effluents from the first-stage fermentation contain a significant amount of SMPs (such as acetate and butyrate), which are favourable substrates for methanogens in anaerobic digestion. The effects of hydrothermal pretreatment on subsequent biomethane production are shown in Fig. 6 a. The biomethane yield from the effluent of untreated *S. latissima* was 281.4 mL/g VS after digestion of 11 d with a biodegradability of 63.4% (see Table 3). When increasing the hydrothermal temperature to 140 °C, the highest biomethane yield of 345.1 mL/g VS was achieved, corresponding to an increase of 22.6% as compared to that without pretreatment. The biodegradability of *S. latissima* significantly increased to 77.7%. It was noted that the pretreatment at 180 °C reduced the biomethane yield to 278.7 mL/g VS. This was ascribed to the toxic effect caused by inhibitory by-products. A previous study demonstrated that thermal treatment of algal substrate, which contained abundant sugars and amino acids, could cause binary interactions between the carbonyl group (–C=O) and amino group ($–NH_2$), leading to the generation of various fermentative inhibitors (such as methylfurfural, pyrazine compounds, and nitrogen-containing Maillard compounds) [60]. The presence of these inhibitors decreased biomethane production by 43.8% as compared to that in the absence of inhibitors [60]. Therefore, this finding suggests that the optimization of hydrothermal pretreatment is necessary considering the competitive reactions between hydrolysis of

404 polysaccharides and decomposition of mono-sugars.

405 The soluble COD removal efficiency after second-stage anaerobic digestion is shown in Fig. 6 b.
406 The trends of COD removal were similar to that of biomethane production. The COD removal
407 efficiency of the untreated seaweed was 79.5%; this increased to 86.7% and 86.1% when the seaweed
408 was pretreated at 120 and 140 °C, respectively. Further increasing temperature to 180 °C resulted in
409 the lowest COD removal efficiency of 67.4%. This indicates that anaerobic digestion was not capable of
410 removing all the produced COD during hydrothermal solubilization. A higher hydrothermal
411 temperature contributed to a higher generation of COD, but inevitably generated more inhibitory
412 by-products. This, in return, resulted in a lower COD removal efficiency after fermentation and
413 anaerobic digestion.

414 Table 3 shows the kinetic parameters of biomethane production from *S. latissima* by employing
415 the modified Gompertz model. The parameters of biomethane production were evaluated in terms of
416 methane yield potential (H_m), peak methane production rate (R_m), lag-phase time (λ), and peak time
417 (T_m). The modelling results confirmed that hydrothermal pretreatment at 100–160 °C could improve
418 methane yield potential from *S. latissima* by 14.2%–23.7%. Similarly, the peak methane production
419 rate was also enhanced by 8.9%–22.6%. By applying hydrothermal temperature at 180 °C, both
420 methane yield potential and methane production rate decreased to some extent. These results are in
421 agreement with the experimental data.

422

423 ## 3.4. Energy balance of *Saccharina latissima* biomass in dark fermentation and
424 ## anaerobic digestion

425 The results of the energy conversion efficiency are compared to the different process energy
426 efficiencies under three different scenarios, which include: (1) process energy efficiency as per
427 experimental conditions; (2) process energy efficiency with potential heat recovery; and (3) process
428 energy efficiency with reduced water use for hydrothermal pretreatment by 30%, as shown in Fig. 7.
429 The energy conversion efficiency at all conditions shows the higher value compared to the energy
430 process efficiency. The reason for that is obviously due to the fact that the calculation of energy
431 conversion efficiency excludes the external energy supply for pretreatment, dark fermentation and

anaerobic digestion. The total energy conversion efficiency of untreated seaweed was calculated as 59.6%, of which the efficiency of hydrogen was only 0.7% and the efficiency of methane was 58.8%. The hydrothermal pretreatment at 140 °C led to the highest energy conversion efficiency of 72.8%, due to the fact that the highest methane yield was obtained under this condition. It is noted that not all the energy of *S. latissima* was transformed into hydrogen and methane; around 27.2%–41.3% of total energy was still unexploited. This result could be attributed to the following reasons: (1) the degradation efficiency of seaweed substrate was not 100%; (2) a minority of energy was consumed for supporting microbial growth and reproduction; and (3) the formation of unfermentable byproducts during hydrothermal pretreatments.

Taking into account the external energy to supply heat for pretreatment, fermentation and anaerobic digestion, the highest process energy efficiency was achieved as only 37.8% when no pretreatment was applied. Unlike the energy conversion efficiency which peaked at 140 °C, the process efficiency continued to drop with increased temperatures, due to a higher need for external heat. This suggests that the additional methane generated was not sufficient to overcome the added heat required to maintain the temperature of pretreatment. Even with reducing the water use by as much as 30%, the process energy balance showed minimal improvement. However, a significant gain in process energy efficiency was obtained if the heat from the hydrolysates was recovered. A new peak of process energy efficiency was obtained at 160 °C of 56.9%. Thus, the use of waste heat is of importance, whereby the easiest use is to maintain the heat for fermentation and anaerobic digestion. Upon further system optimisation and integration, the reported cascading system may open a valuable approach for seaweed processing and valorisation.

3.5. Comparison of gaseous biofuels production from macroalgae with literature

Table 4 provides relevant studies on the pretreatment of various macroalgae and the resulting biohydrogen and biomethane production. Macroalgae including brown (such as *Laminaria japonica* and *Sargassum sp.*) and red (such as *Gelidium amansii*) algae have been investigated for one-stage biohydrogen production and two-stage biohydrogen and biomethane co-production. There are many pretreatment methods that have been studied in the literature, including thermal, thermal acid and

460 microwave acid pretreatments [61]. These pretreatment methods could lead to an increase in biofuel
461 production to different extents. For example, biohydrogen yield from *L. japonica* was significantly
462 enhanced (by 143%) after combining thermal and hydrochloric acid pretreatment [62]. Yin et al.
463 investigated the effect of combined microwave-acid pretreatment on fermentative hydrogen
464 production from *L. japonica* [31]. The results showed that pretreatment at 140 °C with 1% H_2SO_4 for
465 15 min increased biohydrogen yield from 15 to 28 mL/ g dry weight [31]. In comparision, the research
466 on two-stage fermentation using pretreated macroalgae has seldom been investigated. Costa et al.
467 demonstrated the feasibility of biohydrogen and biomethane co-production from thermally pretreated
468 *Sargassum* sp., which could greatly improve the energy conversion efficiency from macroalgae [63]. In
469 the present paper, hydrothermal pretreatment has been successfully applied to improve biofuels
470 production from brown seaweed *S. latissima*. The biomethane yield was enhanced by 22.6% under
471 optimal condition. The biodegradability of untreated *S. latissima* was 63.4%, and raised to 77.7% with
472 hydrothermal pretreatment at 140 ^{o}C for 30 minute in a two stage system. Coupled with methane
473 fermentation, the two-stage fermentation process achieved the highest overall energy efficiency from
474 seaweed, demonstrating the feasibility for future commercial applications.
475

476 # 4. Conclusions

477 Hydrothermal pretreatment of seaweed *S. latissima* could significantly break down the
478 recalcitrant macro- and micro-structures of seaweed and was proven to be effective to produce
479 gaseous biofuels. The major findings are as follows:
480 1) The first-stage biohydrogen yield only slightly increased via dark fermentation after pretreatment,
481 while the second-stage biomethane yield significantly increased by 22.6% under the optimal
482 pretreatment temperature of 140 °C. The maximum energy conversion efficiency of 72.8% was
483 achieved after two-stage biohydrogen and biomethane co-production.
484 2) When considering the extra energy input for pretreatment, fermentation and digestion, the
485 highest process energy efficiency obtained was 37.8% using untreated seaweed. This efficiency
486 continued to drop with increasing pretreatment temperature, suggesting the additional methane
487 generated was not sufficient to overcome the energy required to maintain the pretreatment

temperature.

3) However, a significant increase in efficiency (to 56.9%) can be achieved through heat recovery from hydrothermal pretreatment at 160 °C. Upon further system optimisation, this enables the possibility of combining thermochemical and biological treatments for seaweed exploitation and can promote circular bioeconomy concepts.

Acknowledgements

This collarbrative work is supported by the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant (No. 797259) and the Environmental Protection Agency – Ireland (2018-RE-MS-13). This study is also co-funded by Science Foundation Ireland (SFI) through the Centre for Marine and Renewable Energy (MaREI) under Grant No. 12/RC/2302 and 16/SP/3829. Industrial co-funding from ERVIA and Gas Networks Ireland (GNI) through the Gas Innovation Group is gratefully appreciated.

References

1. Robertson, G.P., Hamilton, S.K., Barham, B.L., Dale, B.E., Izaurralde, R.C., Jackson, R.D., Landis, D.A., Swinton, S.M., Thelen, K.D., and Tiedje, J.M., *Cellulosic biofuel contributions to a sustainable energy future: Choices and outcomes.* Science, 2017. **356**(6345): eaal2324.
2. *European Commission. Proposal for a DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the promotion of the use of energy from renewable sources (recast) 2017; 382.* European Commission.
3. Chen, G., Zhao, L., and Qi, Y., *Enhancing the productivity of microalgae cultivated in wastewater toward biofuel production: A critical review.* Applied Energy, 2015. **137**: 282-291.
4. Tabassum, M.R., Xia, A., and Murphy, J.D., *Potential of seaweed as a feedstock for renewable gaseous fuel production in Ireland.* Renewable and Sustainable Energy Reviews, 2017. **68**: 136-146.
5. Cardeña, R., Moreno, G., Bakonyi, P., and Buitrón, G., *Enhancement of methane production from various microalgae cultures via novel ozonation pretreatment.* Chemical Engineering

Journal, 2017. **307**: 948-954.

6. Ganesh Saratale, R., Kumar, G., Banu, R., Xia, A., Periyasamy, S., and Dattatraya Saratale, G., *A critical review on anaerobic digestion of microalgae and macroalgae and co-digestion of biomass for enhanced methane generation.* Bioresource Technology, 2018. **262**: 319-332.

7. Ruiz, H.A., Rodríguez-Jasso, R.M., Fernandes, B.D., Vicente, A.A., and Teixeira, J.A., *Hydrothermal processing, as an alternative for upgrading agriculture residues and marine biomass according to the biorefinery concept: A review.* Renewable and Sustainable Energy Reviews, 2013. **21**: 35-51.

8. Bhatia, S.K., Joo, H.-S., and Yang, Y.-H., *Biowaste-to-bioenergy using biological methods – A mini-review.* Energy Conversion and Management, 2018. **177**: 640-660.

9. Xia, A., Cheng, J., and Murphy, J.D., *Innovation in biological production and upgrading of methane and hydrogen for use as gaseous transport biofuel.* Biotechnology Advances, 2016. **34**(5): 451-472.

10. Anastasakis, K. and Ross, A., *Hydrothermal liquefaction of the brown macro-alga Laminaria saccharina: effect of reaction conditions on product distribution and composition.* Bioresource technology, 2011. **102**(7): 4876-4883.

11. Allen, E., Browne, J., Hynes, S., and Murphy, J., *The potential of algae blooms to produce renewable gaseous fuel.* Waste management, 2013. **33**(11): 2425-2433.

12. Wieczorek, N., Kucuker, M.A., and Kuchta, K., *Fermentative hydrogen and methane production from microalgal biomass (Chlorella vulgaris) in a two-stage combined process.* Applied Energy, 2014. **132**: 108-117.

13. Yuan, Y. and Macquarrie, D.J., *Microwave Assisted Acid Hydrolysis of Brown Seaweed Ascophyllum nodosum for Bioethanol Production and Characterization of Alga Residue.* ACS Sustainable Chemistry & Engineering, 2015. **3**(7): 1359-1365.

14. Nigam, P.S. and Singh, A., *Production of liquid biofuels from renewable resources.* Progress in Energy and Combustion Science, 2011. **37**(1): 52-68.

15. Sharma, S., Neves, L., Funderud, J., Mydland, L.T., Øverland, M., and Horn, S.J., *Seasonal and depth variations in the chemical composition of cultivated Saccharina latissima.* Algal research, 2018. **32**: 107-112.

16. Allen, E., Wall, D.M., Herrmann, C., Xia, A., and Murphy, J.D., *What is the gross energy yield of third generation gaseous biofuel sourced from seaweed?* Energy, 2015. **81**: 352-360.
17. He, L., Huang, H., Lei, Z., Liu, C., and Zhang, Z., *Enhanced hydrogen production from anaerobic fermentation of rice straw pretreated by hydrothermal technology.* Bioresource technology, 2014. **171**: 145-151.
18. Ren, N.-Q., Zhao, L., Chen, C., Guo, W.-Q., and Cao, G.-L., *A review on bioconversion of lignocellulosic biomass to H 2: Key challenges and new insights.* Bioresource technology, 2016. **215**: 92-99.
19. Bhatia, S.K., Kim, S.-H., Yoon, J.-J., and Yang, Y.-H., *Current status and strategies for second generation biofuel production using microbial systems.* Energy Conversion and Management, 2017. **148**: 1142-1156.
20. Lin, R., Cheng, J., and Murphy, J.D., *Unexpectedly low biohydrogen yields in co-fermentation of acid pretreated cassava residue and swine manure.* Energy Conversion and Management, 2017. **151**(Supplement C): 553-561.
21. Behera, S., Arora, R., Nandhagopal, N., and Kumar, S., *Importance of chemical pretreatment for bioconversion of lignocellulosic biomass.* Renewable and Sustainable Energy Reviews, 2014. **36**: 91-106.
22. Zhen, G., Lu, X., Kato, H., Zhao, Y., and Li, Y.-Y., *Overview of pretreatment strategies for enhancing sewage sludge disintegration and subsequent anaerobic digestion: Current advances, full-scale application and future perspectives.* Renewable and Sustainable Energy Reviews, 2017. **69**: 559-577.
23. Li, C., Zhang, G., Zhang, Z., Ma, D., Wang, L., and Xu, G., *Hydrothermal pretreatment for biogas production from anaerobic digestion of antibiotic mycelial residue.* Chemical Engineering Journal, 2015. **279**: 530-537.
24. Riau, V., De la Rubia, M.A., and Pérez, M., *Upgrading the temperature-phased anaerobic digestion of waste activated sludge by ultrasonic pretreatment.* Chemical Engineering Journal, 2015. **259**: 672-681.
25. Passos, F., Carretero, J., and Ferrer, I., *Comparing pretreatment methods for improving microalgae anaerobic digestion: Thermal, hydrothermal, microwave and ultrasound.*

574 Chemical Engineering Journal, 2015. **279**: 667-672.
575 26. Chen, H., Rao, Y., Cao, L., Shi, Y., Hao, S., Luo, G., and Zhang, S., *Hydrothermal conversion of*
576 *sewage sludge: Focusing on the characterization of liquid products and their methane yields.*
577 Chemical Engineering Journal, 2019. **357**: 367-375.
578 27. Aguilar-Reynosa, A., Romani, A., Rodriguez-Jasso, R.M., Aguilar, C.N., Garrote, G., and Ruiz,
579 H.A., *Microwave heating processing as alternative of pretreatment in second-generation*
580 *biorefinery: an overview.* Energy Conversion and Management, 2017. **136**: 50-65.
581 28. Maneein, S., Milledge, J., Nielsen, B., and Harvey, P., *A review of seaweed pre-treatment*
582 *methods for enhanced biofuel production by anaerobic digestion or fermentation.*
583 Fermentation, 2018. **4**(4): 100.
584 29. Hu, Y., Wang, S., Wang, Q., He, Z., Lin, X., Xu, S., Ji, H., and Li, Y., *Effect of different*
585 *pretreatments on the thermal degradation of seaweed biomass.* Proceedings of the
586 Combustion Institute, 2017. **36**(2): 2271-2281.
587 30. Yazdani, P., Zamani, A., Karimi, K., and Taherzadeh, M.J., *Characterization of Nizimuddinia*
588 *zanardini macroalgae biomass composition and its potential for biofuel production.*
589 Bioresource technology, 2015. **176**: 196-202.
590 31. Yin, Y. and Wang, J., *Pretreatment of macroalgal Laminaria japonica by combined*
591 *microwave-acid method for biohydrogen production.* Bioresource technology, 2018. **268**:
592 52-59.
593 32. Jung, K.-W., Kim, D.-H., Kim, H.-W., and Shin, H.-S., *Optimization of combined (acid+ thermal)*
594 *pretreatment for fermentative hydrogen production from Laminaria japonica using response*
595 *surface methodology (RSM).* International journal of hydrogen energy, 2011. **36**(16):
596 9626-9631.
597 33. Lin, R., Cheng, J., Ding, L., Song, W., Zhou, J., and Cen, K., *Inhibitory effects of furan derivatives*
598 *and phenolic compounds on dark hydrogen fermentation.* Bioresource Technology, 2015. **196**:
599 250-255.
600 34. Ruiz, H.A., Rodríguez-Jasso, R.M., Aguedo, M., and Kádár, Z., *Hydrothermal pretreatments of*
601 *macroalgal biomass for biorefineries*, in *Algal biorefineries*. 2015, Springer. p. 467-491.
602 35. Meillisa, A., Woo, H.-C., and Chun, B.-S., *Production of monosaccharides and bio-active*

603 *compounds derived from marine polysaccharides using subcritical water hydrolysis.* Food
604 Chemistry, 2015. **171**: 70-77.
605 36. Jard, G., Dumas, C., Delgenes, J.P., Marfaing, H., Sialve, B., Steyer, J.P., and Carrère, H., *Effect*
606 *of thermochemical pretreatment on the solubilization and anaerobic biodegradability of the*
607 *red macroalga Palmaria palmata.* Biochemical Engineering Journal, 2013. **79**: 253-258.
608 37. Deng, C., Lin, R., Cheng, J., and Murphy, J.D., *Can acid pre-treatment enhance biohydrogen*
609 *and biomethane production from grass silage in single-stage and two-stage fermentation*
610 *processes?* Energy Conversion and Management, 2019. **195**: 738-747.
611 38. Ding, L., Cheng, J., Qiao, D., Yue, L., Li, Y.-Y., Zhou, J., and Cen, K., *Investigating hydrothermal*
612 *pretreatment of food waste for two-stage fermentative hydrogen and methane co-production.*
613 Bioresource Technology, 2017. **241**: 491-499.
614 39. APHA, *Standard methods for the examination of water and wastewater. American Public*
615 *Health Association.* Inc., Washington, DC, 1998.
616 40. Nitsos, C.K., Matis, K.A., and Triantafyllidis, K.S., *Optimization of hydrothermal pretreatment*
617 *of lignocellulosic biomass in the bioethanol production process.* ChemSusChem, 2013. **6**(1):
618 110-122.
619 41. Perera, K.R.J., Ketheesan, B., Arudchelvam, Y., and Nirmalakhandan, N., *Fermentative*
620 *biohydrogen production II: Net energy gain from organic wastes.* international journal of
621 hydrogen energy, 2012. **37**(1): 167-178.
622 42. Wang, S., Jiang, X., Wang, Q., Ji, H., Wu, L., Wang, J., and Xu, S., *Research of specific heat*
623 *capacities of three large seaweed biomass.* Journal of Thermal Analysis and Calorimetry, 2014.
624 **115**(3): 2071-2077.
625 43. Soltan, M., Elsamadony, M., and Tawfik, A., *Biological hydrogen promotion via integrated*
626 *fermentation of complex agro-industrial wastes.* Applied energy, 2017. **185**: 929-938.
627 44. National Institute of Standards and Technology. NIST Chemistry WebBook, available in
628 http://webbook.nist.gov/.
629 45. Nizami, A.-S., Korres, N.E., and Murphy, J.D., *Review of the integrated process for the*
630 *production of grass biomethane.* Environmental science & technology, 2009. **43**(22):
631 8496-8508.

632 46. Zhang, J., Zhu, X., Mondejar, M.E., and Haglind, F., *A review of heat transfer enhancement*
633 *techniques in plate heat exchangers.* Renewable and Sustainable Energy Reviews, 2019. **101**:
634 305-328.
635 47. Yuan, T., Cheng, Y., Zhang, Z., Lei, Z., and Shimizu, K., *Comparative study on hydrothermal*
636 *treatment as pre- and post-treatment of anaerobic digestion of primary sludge: Focus on*
637 *energy balance, resources transformation and sludge dewaterability.* Applied Energy, 2019.
638 **239**: 171-180.
639 48. Vivekanand, V., Eijsink, V.G., and Horn, S.J., *Biogas production from the brown seaweed*
640 *Saccharina latissima: thermal pretreatment and codigestion with wheat straw.* Journal of
641 Applied Phycology, 2012. **24**(5): 1295-1301.
642 49. Schiener, P., Black, K.D., Stanley, M.S., and Green, D.H., *The seasonal variation in the chemical*
643 *composition of the kelp species Laminaria digitata, Laminaria hyperborea, Saccharina*
644 *latissima and Alaria esculenta.* Journal of Applied Phycology, 2015. **27**(1): 363-373.
645 50. Handå, A., Forbord, S., Wang, X., Broch, O.J., Dahle, S.W., Størseth, T.R., Reitan, K.I., Olsen, Y.,
646 and Skjermo, J., *Seasonal-and depth-dependent growth of cultivated kelp (Saccharina*
647 *latissima) in close proximity to salmon (Salmo salar) aquaculture in Norway.* Aquaculture,
648 2013. **414**: 191-201.
649 51. Lopez-Contreras, A., Harmsen, P., Blaauw, R., Houweling-Tan, B., Wal, H., Huijgen, W., and Hal,
650 J.v., *Biorefinery of the brown seaweed Saccharina latissima for fuels and chemicals.* Policy
651 Studies, 2016. **2015**(2014): 2013.
652 52. Yahmed, N.B., Carrere, H., Marzouki, M.N., and Smaali, I., *Enhancement of biogas production*
653 *from Ulva sp. by using solid-state fermentation as biological pretreatment.* Algal Research,
654 2017. **27**: 206-214.
655 53. Abirami, S., Srisudha, S., and Gunasekaran, P., *Comparative study of chromium biosorption*
656 *using brown, red and green macroalgae.* Int J Biol Pharm Res, 2013. **4**: 115-129.
657 54. Sivakumar, K., Kannappan, S., Dineshkumar, M., and Patil, P.K., *Evaluation of marine macro*
658 *alga, Ulva fasciata against bio-luminescent causing Vibrio harveyi during Penaeus monodon*
659 *larviculture.* African Journal of Microbiology Research, 2014. **8**(8): 803-813.
660 55. Radhika, D. and Mohaideen, A., *Fourier transform infrared analysis of Ulva lactuca and*

Gracilaria corticata and their effect on antibacterial activity. Asian. J. Pharm. Clin. Res, 2015. **8**: 209-212.

56. Xia, A., Cheng, J., Lin, R., Ding, L., Zhou, J., and Cen, K., *Combination of hydrogen fermentation and methanogenesis to enhance energy conversion efficiency from trehalose.* Energy, 2013. **55**: 631-637.

57. Xia, A., Jacob, A., Herrmann, C., Tabassum, M.R., and Murphy, J.D., *Production of hydrogen, ethanol and volatile fatty acids from the seaweed carbohydrate mannitol.* Bioresource Technology, 2015. **193**: 488-497.

58. Heyndrickx, M., Vos, P.D., and Ley, J.D., *Fermentation characteristics of Clostridium pasteurianum LMG 3285 grown on glucose and mannitol.* Journal of applied bacteriology, 1991. **70**(1): 52-58.

59. Matsumura, Y., Sato, K., Al-saari, N., Nakagawa, S., and Sawabe, T., *Enhanced hydrogen production by a newly described heterotrophic marine bacterium, Vibrio tritonius strain AM2, using seaweed as the feedstock.* International Journal of Hydrogen Energy, 2014. **39**(14): 7270-7277.

60. Lin, R., Cheng, J., and Murphy, J.D., *Inhibition of thermochemical treatment on biological hydrogen and methane co-production from algae-derived glucose/glycine.* Energy Conversion and Management, 2018. **158**: 201-209.

61. Shobana, S., Kumar, G., Bakonyi, P., Saratale, G.D., Al-Muhtaseb, A.a.H., Nemestóthy, N., Bélafi-Bakó, K., Xia, A., and Chang, J.-S., *A review on the biomass pretreatment and inhibitor removal methods as key-steps towards efficient macroalgae-based biohydrogen production.* Bioresource technology, 2017. **244**: 1341-1348.

62. Jung, K.-W., Kim, D.-H., and Shin, H.-S., *Fermentative hydrogen production from Laminaria japonica and optimization of thermal pretreatment conditions.* Bioresource Technology, 2011. **102**(3): 2745-2750.

63. Costa, J.C., Oliveira, J.V., Pereira, M.A., Alves, M.M., and Abreu, A.A., *Biohythane production from marine macroalgae Sargassum sp. coupling dark fermentation and anaerobic digestion.* Bioresource technology, 2015. **190**: 251-256.

64. Xia, A., Jacob, A., Tabassum, M.R., Herrmann, C., and Murphy, J.D., *Production of hydrogen,*

ethanol and volatile fatty acids through co-fermentation of macro- and micro-algae. Bioresource Technology, 2016. **205**: 118-125.

65. Park, J.-H., Cheon, H.-C., Yoon, J.-J., Park, H.-D., and Kim, S.-H., *Optimization of batch dilute-acid hydrolysis for biohydrogen production from red algal biomass.* International Journal of Hydrogen Energy, 2013. **38**(14): 6130-6136.

List of Figures and Tables

Fig.1. Schematic for two-stage dark hydrogen fermentation and anaerobic digestion. Green boxes indicate materials. Grey boxes indicate processes. SMPs: soluble metabolic products.

Fig. 2. FTIR spectra of *Saccharina latissima* before and after hydrothermal pretreatment.

Fig. 3. Soluble COD and monosaccharic mannitol yield after hydrothermal pretreatment of *Saccharina latissima*: (a) soluble COD yield; and (b) mannitol yield. Data are presented as mean ± standard deviation.

Fig. 4. Biohydrogen yield from *Saccharina latissima* after hydrothermal pretreatment. Data are presented as mean ± standard deviation.

Fig. 5. Schematic of dark fermentation and anaerobic digestion of *Saccharina latissima*.

Fig. 6. Biomethane yield and soluble COD removal after anaerobic digestion: (a) Biomethane yield; and (b) COD removal efficiency. Data are presented as mean ± standard deviation.


Fig. 7. Energy conversion efficiency (η_{ece}) and process energy efficiency (η_{pe}) of the cascading dark fermentation and anaerobic digestion. $\eta_{pe,HR}$: Considering heat recovery from cooling down of pretreated hydrolysates. $\eta_{pe,LW}$: Considering 30% less water use than that in hydrothermal pretreatment without heat recovery.

Table 1 Compositional analysis of dried seaweed *Saccharina latissima.*

Table 2 Soluble metabolite products (SMPs) profile after dark hydrogen fermentation of *Saccharina latissima* biomass.

Table 3 Kinetic parameters of biomethane production from *Saccharina latissima* biomass.

Table 4 Biohydrogen and biomethane production from macroalgal biomass with various pretreatments.

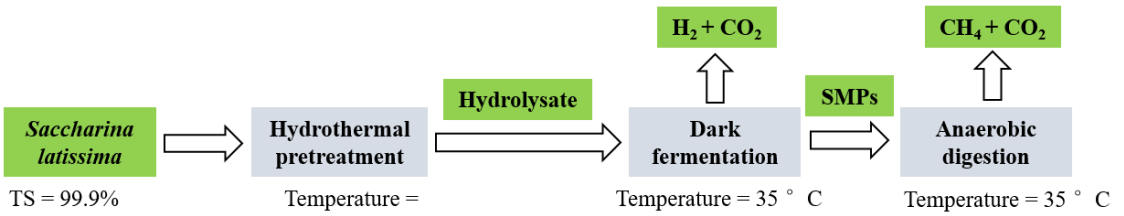

720

721 Fig.1. Schematic for two-stage dark hydrogen fermentation and anaerobic digestion. Green boxes

722 indicate materials, and grey boxes indicate processes. SMPs: soluble metabolic products.

723



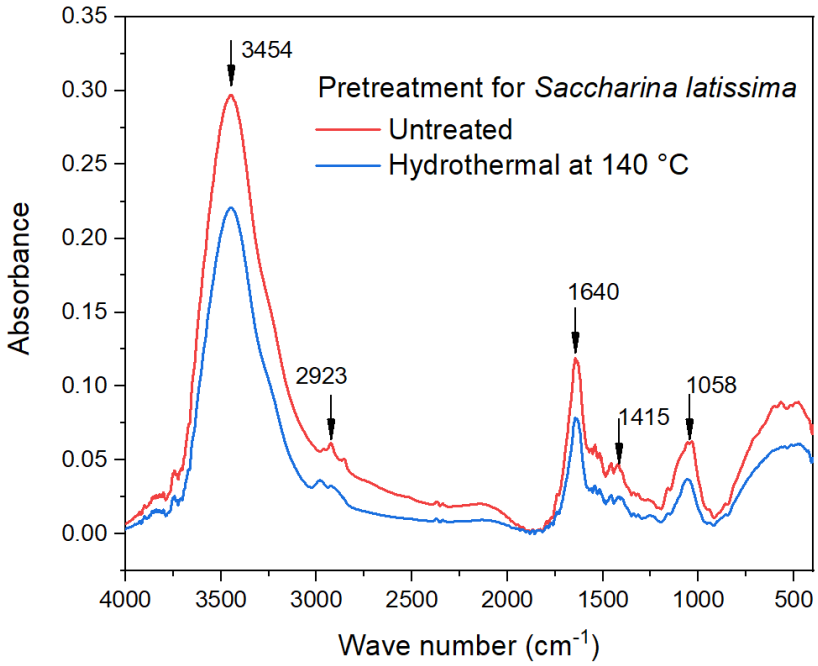


Fig. 2. FTIR spectra of *Saccharina latissima* before and after hydrothermal pretreatment.

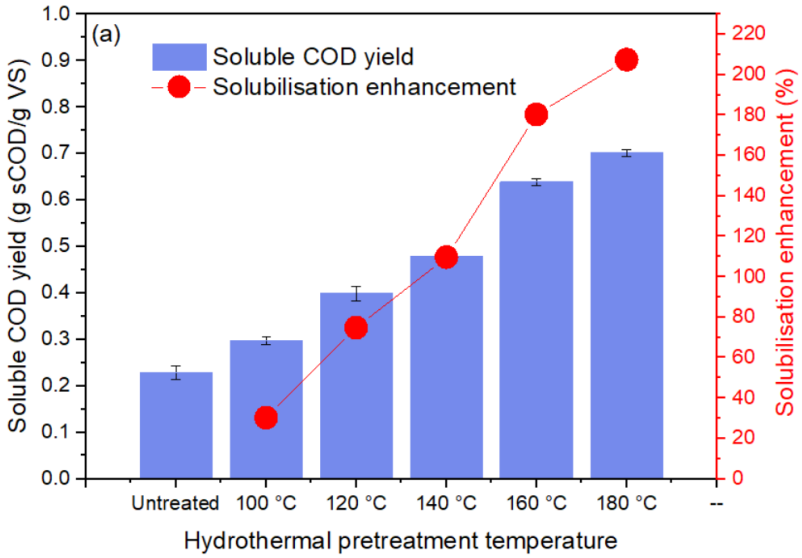

729

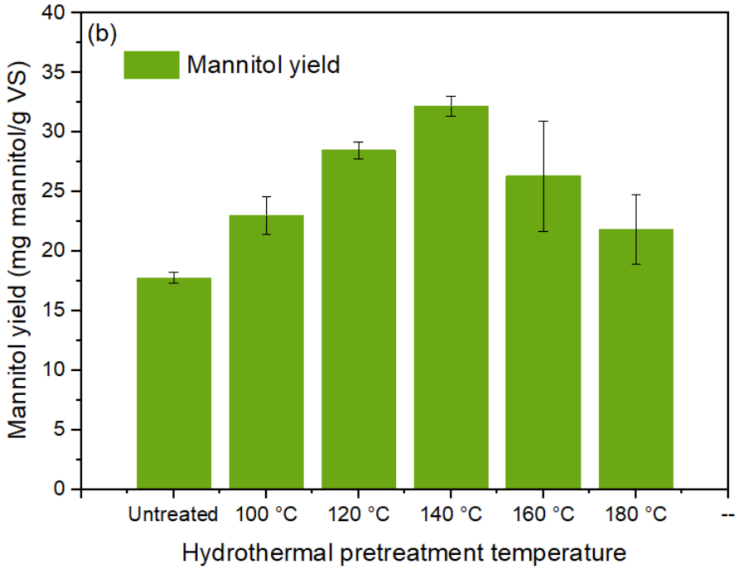


730

731 Fig. 3. Soluble COD and monosaccharic mannitol yield after hydrothermal pretreatment of *Saccharina*

732 *latissima*: (a) soluble COD yield; and (b) mannitol yield. Data are presented as mean ± standard

733 deviation.

734

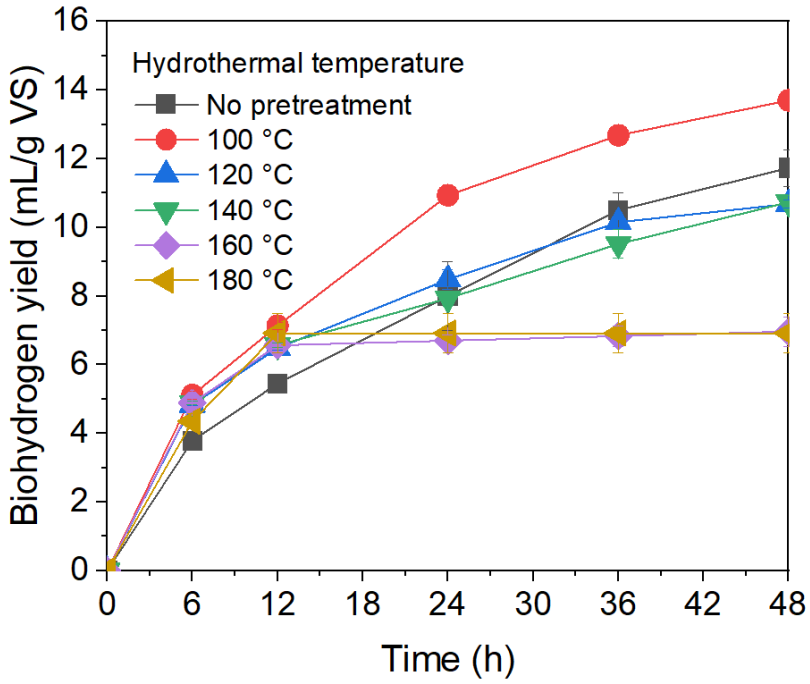


735

736 Fig. 4. Biohydrogen yield from *Saccharina latissima* after hydrothermal pretreatment. Data are

737 presented as mean ± standard deviation.


738

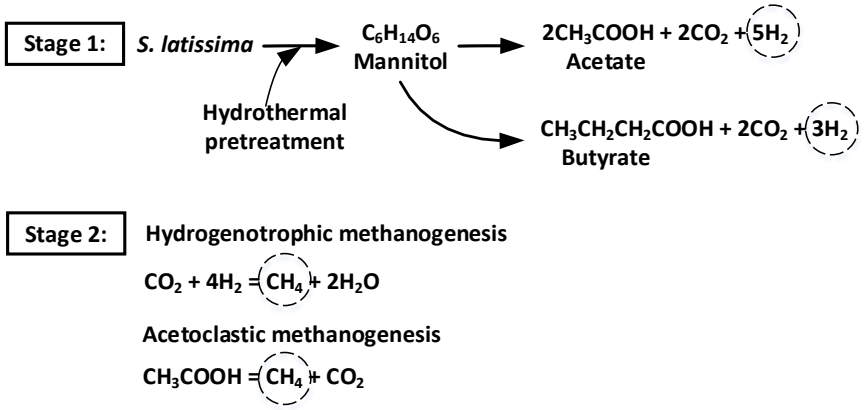


739

740 Fig. 5. Schematic of dark fermentation and anaerobic digestion of *Saccharina latissima*.

741

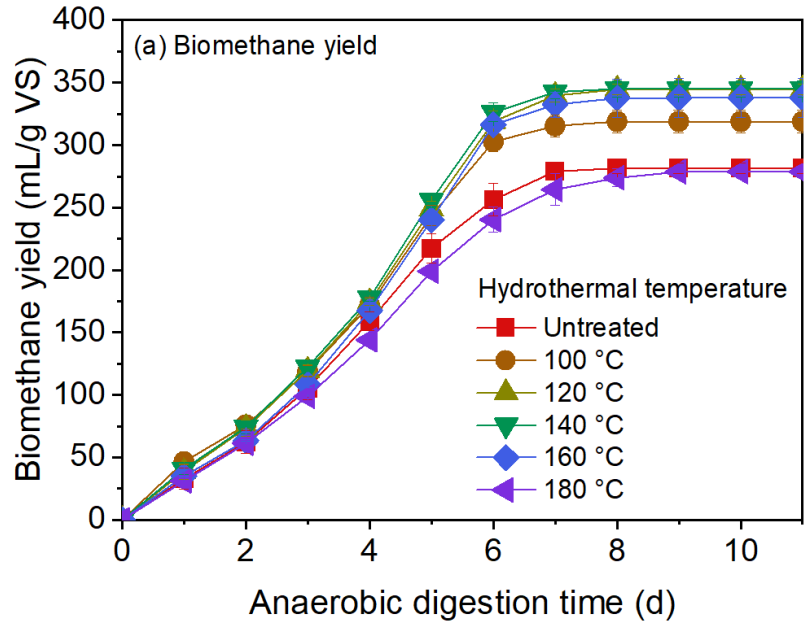

742

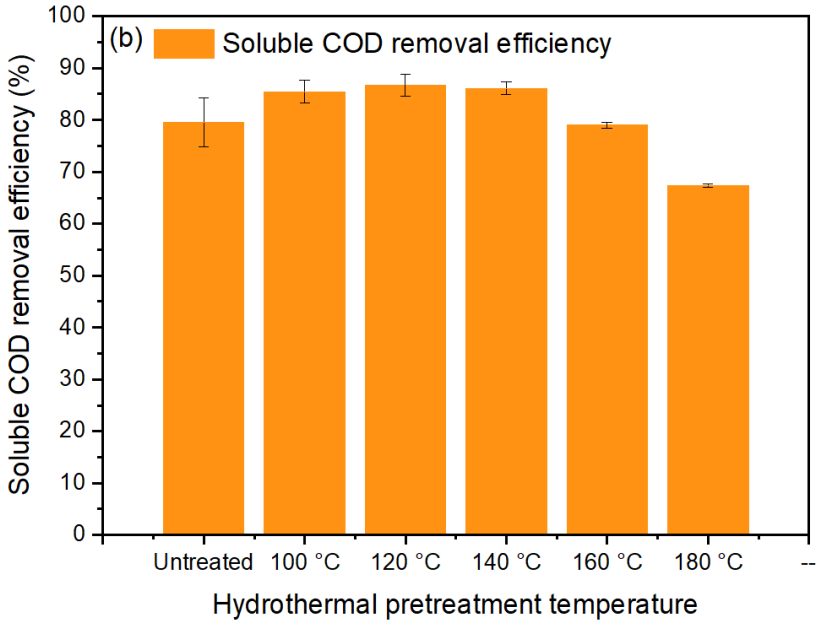


743

744 Fig. 6. Biomethane yield and soluble COD removal after anaerobic digestion: (a) Biomethane yield; and

745 (b) COD removal efficiency. Data are presented as mean ± standard deviation.

746

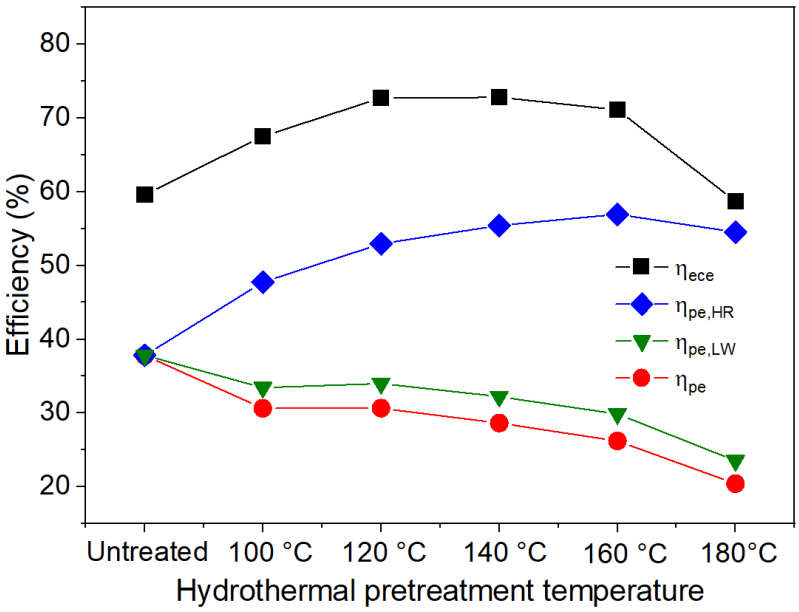

747

748 Fig. 7. Energy conversion efficiency (η_{ece}) and process energy efficiency (η_{pe}) of the cascading dark

749 fermentation and anaerobic digestion. $\eta_{pe,HR}$: Considering heat recovery from cooling down of

750 pretreated hydrolysates. $\eta_{pe,LW}$: Considering 30% less water use than that in hydrothermal

751 pretreatment without heat recovery.

752

753 Table 1 Compositional analysis of dried seaweed *Saccharina latissima.*

Parameter	*S. latissima*
Proximate analysis (wwt%)	
TS	99.9
VS	66.0
VS/TS (%)	66.1
Ultimate analysis (%TS)	
Carbon	31.5
Hydrogen	4.0
Oxygen	28.4
Nitrogen	2.2
C/N mass ratio	14.3
Energy value (kJ/g VS)	17.1
Theoretical biomethane yield (mL/g VS)	443.9

754

755 Table 2 Soluble metabolite products (SMPs) profile after dark hydrogen fermentation of *Saccharina*

756 *latissima* biomass.

Compositions (g/L)	Untreated	100 °C	120 °C	140 °C	160 °C	180 °C
Acetic acid	3.58	3.30	3.67	3.82	3.76	3.70
Propionic acid	0.30	0.14	0.12	0.21	0.19	0.43
Iso-butyric acid	0.21	0.20	0.14	0.20	0.17	0.18
Butyric acid	1.33	1.13	0.78	1.25	0.43	0.81
Iso-valeric acid	0.14	0.15	0.09	0.15	0.10	0.13
Valeric acid	0.14	0.18	0.14	0.20	0.20	0.20
Caproic acid	0.02	0.02	0.02	0.02	0.01	0.06
Total SMPs	5.73	5.12	4.96	5.84	4.87	5.51

757

758 Table 3 Kinetic parameters of biomethane production from *Saccharina latissima* biomass.

Pretreatment	Experimental methane yield (mL/gVS)	Peak production rate (mL/gVS/d)	Kinetic model parameters					Biodegradability (%)
			H_m [a] (mL/gVS)	R_m [b] (mL/gVS/d)	λ [c] (d)	T_m [d] (d)	R^2	
Untreated	281.4±4.2	58.5±4.1	294.1	59.4	1.1	2.9	0.991	63.4
100 °C	318.8±9.1	71.9±1.9	336.1	64.7	0.9	2.8	0.982	71.8
120 °C	344.6±3.9	74.4±3.8	363.7	70.5	1.2	3.1	0.985	77.6
140 °C	345.1±6.3	78.1±3.1	363.5	72.4	1.2	3.0	0.983	77.7
160 °C	337.8±15.5	76.3±3.6	355.4	72.8	1.4	3.2	0.984	76.1
180 °C	278.7±2.4	54.9±1.7	293.7	52.6	1.0	3.1	0.993	62.8

759 Note: [a] H_m is maximum methane yield potential; [b] R_m is peak methane production rate; [c] λ is lag-phase
760 time of methane production; [d] T_m is peak time of methane production (calculated as: $T_m = H_m/R_m/e + \lambda$).
761
762

Table 4 Biohydrogen and biomethane production from macroalgal biomass with various pretreatments.

Macroalgae species	Pretreatment	Hydrogen yield	Methane yield	Increases in hydrogen and methane production	Ref.
Laminaria japonica	Thermal; T=150–180 °C; t=5–40 min	69.1–109.6 mL H_2/g COD_{added}	/	From –10.7% to +63.9% (H_2)	[62]
Laminaria japonica	Combined acid + thermal; T=60, 110, 160 °C; t=5, 22.5,40 min; HCl dosage=0, 6, 12% (w/w)	9.5–163.1mL H_2 g/ dry algae	/	From –86% to +143% (H_2)	[32]
Laminaria japonica	Combined microwave-acid + thermal, T=140 °C; t= 15 min, H_2SO_4 dosage=0, 0.5, 1 and 2% (v/v)	15.0–26.8mL H_2/g dry algae	/	From –0.6% to +77.5% (H_2)	[31]
Laminaria digitata and *Arthrospira platensis*	Combined acid + thermal, T= 95, 115 and 135 °C; t=15 min; H_2SO_4 dosage=2.5 and 5% (v/v)	60.5–70.6 mL H_2/g VS	/	From –7.2% to +16.7% (H_2)	[64]
Gelidium amansii	Combined acid + thermal, T=120, 150, 180 °C; t=15 min; H_2SO_4 dosage=0.5, 1, 1.5% (w/w)	0–37.0 mL H_2/g dry algae	/	N.A.	[65]
Sargassum sp.	Thermal, T=121 °C; t=15 min	60.8–91.3 mL H_2/g VS	345–541 mL CH_4/g VS	N.A.	[63]
Saccharina latissima	Hydrothermal, T=100, 120, 140, 160, 180 °C; t=10 min	6.9–13.7 mL H_2/g VS	278.7–345.1 mL CH_4/g VS	From –41.0% to +17.0% (H_2) From –9.6% to +22.6% (CH_4)	This study