

Title	Emergency response MAC protocol (ER-MAC) for wireless sensor networks
Authors	Sitanayah, Lanny;Sreenan, Cormac J.;Brown, Kenneth N.
Publication date	2010-04
Original Citation	Sitanayah, L., Sreenan, C. J. and Brown, K. N. (2010) 'Emergency response MAC protocol (ER-MAC) for wireless sensor networks', Poster Abstract, Proceedings of the 9th ACM/IEEE International Conference on Information Processing in Sensor Networks, Stockholm, Sweden, 12-16 April, 1791256: ACM, pp. 364-365. doi: 10.1145/1791212.1791256
Type of publication	Conference item
Link to publisher's version	https://dl.acm.org/citation.cfm?id=1791256 - 10.1145/1791212.1791256
Rights	© ACM New York, NY, USA ©2010. This is the author's version of the work. It is posted here for your personal use. Not for redistribution. The definitive Version of Record was published in IPSN '10 Proceedings of the 9th ACM/IEEE International Conference on Information Processing in Sensor Networks, http://dx.doi.org/10.1145/10.1145/1791212.1791256
Download date	2025-09-02 18:53:58
Item downloaded from	https://hdl.handle.net/10468/8954



UCC

University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Emergency Response MAC Protocol (ER-MAC) for Wireless Sensor Networks

Lanny Sitanayah
Dept. of Computer Science
University College Cork
Cork, Ireland
ls3@cs.ucc.ie

Cormac J. Sreenan
Dept. of Computer Science
University College Cork
Cork, Ireland
cjs@cs.ucc.ie

Kenneth N. Brown
Dept. of Computer Science
University College Cork
Cork, Ireland
k.brown@cs.ucc.ie

ABSTRACT

We introduce ER-MAC, a hybrid MAC protocol for emergency response wireless sensor networks. ER-MAC is designed as a hybrid of the TDMA and CSMA approaches, giving it the flexibility to adapt to traffic and topology changes. It adopts a TDMA approach to schedule collision-free slots. Nodes wake up for their scheduled slots, but otherwise sleep to conserve energy. When an emergency occurs, nodes that participate in the emergency monitoring change their MAC behaviour by allowing contention in TDMA slots. Simulations in ns-2 show that ER-MAC outperforms Z-MAC with higher delivery ratio, lower latency, and lower energy consumption.

Categories and Subject Descriptors

C.2.1 [Computer-Communication Networks]: Network Architecture and Design, Wireless communication

General Terms

Algorithms, Design, Performance

Keywords

MAC Protocol, Wireless Sensor Networks, Fire Emergency

1. INTRODUCTION

Wireless sensor networks (WSNs) have been proposed for emergency applications, such as building fire monitoring and response. WSNs that deal with this type of application must be both traffic and topology adaptive. The communication protocol should be delay tolerant during normal periodic monitoring, and energy efficient. But when an emergency event occurs, energy efficiency should be traded for a higher delivery ratio and lower latency. Most existing medium access control (MAC) protocols are not designed to cope with this high level of adaptivity. Protocols such as Z-MAC [3], PMAC [5], and Crankshaft [1] are designed to adapt to traffic changes. However, unlike our proposed protocol ER-MAC (emergency response-MAC), none of them are both traffic and topology adaptive. This requirement creates several new research challenges that we have addressed in our protocol design and implementation.

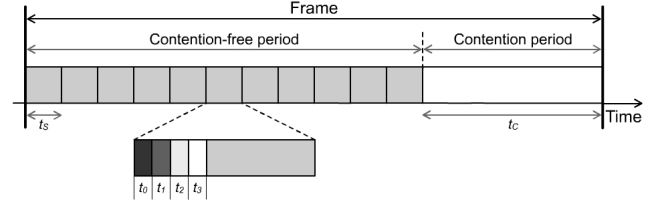


Figure 1: ER-MAC's frame structure

2. ER-MAC PROTOCOL DESIGN

We propose ER-MAC, a hybrid MAC protocol for emergency response WSNs. The key principle of ER-MAC design is a TDMA schedule which access to it is managed adaptively by emergency messages. ER-MAC initially communicates using CSMA/CA. In the startup phase, the data gathering tree and TDMA schedules are created. A non-leaf node assigns one unicast slot to send its own data, several unicast slots to forward its descendants' data and a broadcast slot to synchronise its children.

3. MAC PRIORITISATION

The ER-MAC frame consists of contention-free slots and a contention period as depicted in Fig. 1. We include a contention period at the end of a frame to support new node addition. In normal monitoring, communication between sensor nodes follows the nodes' schedules. To further conserve energy, a sender turns off its radio if it has no data to send and a timeout forces a receiver back to sleep if it does not receive any packets. When fire is detected, only nodes which are affected by the fire change their MAC to emergency mode, while other nodes remain in the normal mode. A node changes the MAC by allowing contention in TDMA slots with the following rules:

- t_0 : owner with high priority packets transmits.
- t_1 : non-owner with high priority packets contends.
- t_2 : owner with low priority packets transmits.
- t_3 : non-owner with low priority packets contends.

4. SIMULATION AND RESULTS

We implemented ER-MAC in ns-2 [4]. The results are based on the mean value of five different network deployments that are simulated five times each using random seeds, enough to achieve a 95% confidence interval. The network consists of 100 nodes deployed within randomly perturbed

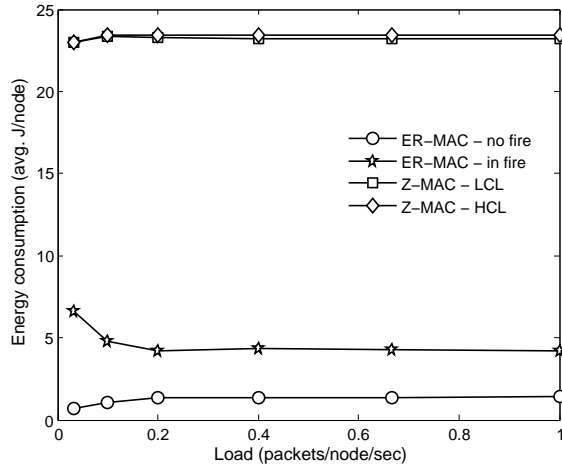


Figure 2: Energy consumption

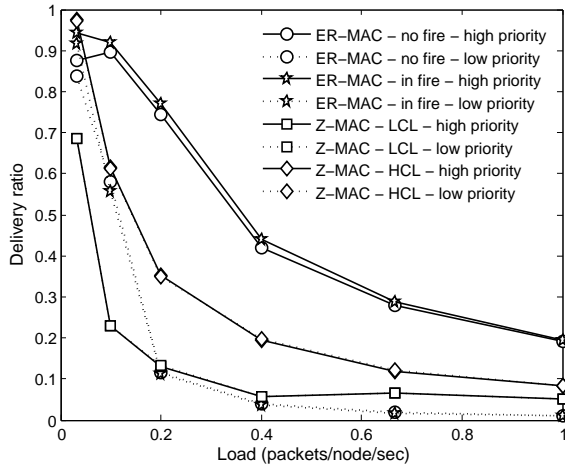


Figure 3: Delivery ratio

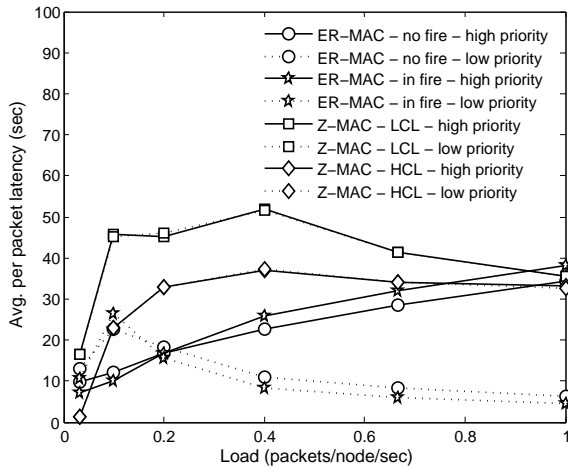


Figure 4: Latency

Table 1: ER-MAC Simulation Parameters in ns-2.

Simulation parameters	Default value
Transmission range	10 m
Transmit power	52.2 mW
Receive/idle listening/transition power	59.1 mW
Sleep power	0.003 mW
Transition time	580 μ s
ER-MAC TDMA slot size	50 ms
ER-MAC TDMA sub-slot size	5 ms

grids, where a node is placed in unit grid (8 m x 8 m) and the coordinates are slightly perturbed. We use a simple wireless channel using the two-ray ground radio propagation model. We also randomly select up to n links and for each drop up to m packets, where m is large enough to model unreliable links. Our simulation parameters presented in Table 1 were based on Tmote sky hardware [2]. In each experiment, we simulated a data gathering for 300 seconds. In all simulations, every sensor node except the base station generates packets with fixed intervals.

We compared the performance of ER-MAC against Z-MAC [3] in terms of average energy consumption per node, packet delivery ratio, and average per packet latency. We considered no-fire and in-fire situations for ER-MAC, and forced Z-MAC to operate in either *low contention level* (LCL) or *high contention level* (HCL) to model these situations. For the in-fire situation, we assume all nodes are in fire from the beginning of the simulation. The results depicted in Figure 2, 3, and 4 show that ER-MAC achieves higher delivery ratio, lower latency, and lower energy consumption compared to Z-MAC.

Our current work includes the implementation of ER-MAC in Contiki running on a Tmote sky testbed and a design of routing protocols for building fire monitoring.

5. ACKNOWLEDGMENTS

This research is fully funded by the NEMBES project, which is supported by the Irish Higher Education Authority PRTL-IV research program.

6. REFERENCES

- [1] G. Halkes and K. Langendoen. Crankshaft: An Energy-Efficient MAC-Protocol for Dense Wireless Sensor Networks. In *Proc. 4th European Conf. Wireless Sensor Networks (EWSN'07)*, pages 228–244, 2007.
- [2] Moteiv. Tmote Sky Datasheet. <http://www.eecs.harvard.edu/~konrad/projects/shimmer/references/tmote-sky-datasheet.pdf>.
- [3] I. Rhee, A. Warrier, M. Aia, and J. Min. Z-MAC: A Hybrid MAC for Wireless Sensor Networks. In *Proc. 3rd Int'l Conf. Embedded Networked Sensor Systems (SenSys'05)*, pages 90–101, 2005.
- [4] VINT. The Network Simulator - ns-2. <http://www.isi.edu/nsnam/ns/>.
- [5] T. Zheng, S. Radhakrishnan, and V. Sarangan. PMAC: An Adaptive Energy-Efficient MAC Protocol for Wireless Sensor Networks. In *Proc. 19th IEEE Int'l Symp. Parallel and Distributed Processing (IPDPS'05)*, pages 65–72, 2005.