


Title	Investigating the influence of ultrasound pre-treatment on drying kinetics and moisture migration measurement in <i>Lactobacillus sakei</i> cultured and uncultured beef jerky
Authors	Ojha, K. Shikha; Kerry, Joseph P.; Tiwari, Brijesh K.
Publication date	2017-03-08
Original Citation	Ojha, K. S., Kerry, J. P. and Tiwari, B. K. (2017) 'Investigating the influence of ultrasound pre-treatment on drying kinetics and moisture migration measurement in <i>Lactobacillus sakei</i> cultured and uncultured beef jerky', <i>LWT - Food Science and Technology</i> , 81, pp. 42-49. doi:10.1016/j.lwt.2017.03.011
Type of publication	Article (peer-reviewed)
Link to publisher's version	10.1016/j.lwt.2017.03.011
Rights	© 2017 Elsevier Ltd. This manuscript version is made available under the CC-BY-NC-ND 4.0 license. - http://creativecommons.org/licenses/by-nc-nd/4.0/
Download date	2026-08-06 21:36:10
Item downloaded from	https://hdl.handle.net/10468/3967

Accepted Manuscript

Investigating the influence of ultrasound processing on drying kinetics and moisture migration measurement in lactobacillus cultured and uncultured beef jerky

K. Shikha Ojha, Joseph P. Kerry, Brijesh K. Tiwari



PII: S0023-6438(17)30156-1

DOI: [10.1016/j.lwt.2017.03.011](https://doi.org/10.1016/j.lwt.2017.03.011)

Reference: YFSTL 6084

To appear in: *LWT - Food Science and Technology*

Received Date: 2 August 2016

Revised Date: 23 February 2017

Accepted Date: 6 March 2017

Please cite this article as: Ojha, K.S., Kerry, J.P., Tiwari, B.K., Investigating the influence of ultrasound processing on drying kinetics and moisture migration measurement in lactobacillus cultured and uncultured beef jerky, *LWT - Food Science and Technology* (2017), doi: 10.1016/j.lwt.2017.03.011.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Investigating the influence of ultrasound processing on drying kinetics and moisture migration measurement in lactobacillus cultured and uncultured beef jerky

K Shikha Ojha^{1,2}, Joseph P Kerry², Brijesh K Tiwari^{1*}

¹Food Biosciences, Teagasc Food Research Centre, Dublin, Ireland

²Food Packaging Group, School of Food and Nutritional Sciences, University College Cork, Cork, Ireland

Address for corresponding author: Teagasc Food Research Centre, Dublin 15, Ireland, Email: brijesh.tiwari@teagasc.ie; Tel: +35318059785; Fax: +35318059550

Abstract

Low Frequency-Nuclear Magnetic Resonance (LF-NMR) was employed to elucidate changes in water distribution in cultured and uncultured beef jerky samples subjected to ultrasound pre-treatment. Ultrasound pre-treatment at frequencies of 25, 33 and 45 kHz for 30 min, followed by marination (18 h) was carried out for both uncultured and cultured (*Lactobacillus sakei*) jerky samples. Water mobility and distribution of water during drying were measured using LF-NMR. Among the various kinetic models assessed, the Wang and Singh model provided the closest fit to the drying experimental data, with high R^2 (≥ 0.994), low RMSE (≤ 0.023) and low AICc (< -74.535) values for both cultured and uncultured samples. Distributed exponential analysis of T2 transversal relaxation times measured by LF-NMR curves revealed the presence of three distinct peaks attributed to; bound water, water present within the dense myofibrillar protein matrix and free-water at a relaxation time range of 0– 10 ms (T2b), 10– 100 ms (T21) and >100 ms (T22), respectively. Results presented in this study demonstrates that the ultrasound effect on drying behaviour was frequency dependent and that LF-NMR can be employed to evaluate moisture mobility and drying degree of beef jerky.

1. Introduction

Beef jerky is a nutrient dense ready-to-eat meat snack, possessing characteristics of a typical intermediate moisture content product with a relatively long shelf-life. Commercially, beef jerky is prepared using a hurdle-technology approach which involves employment of interventions, such as; reducing water activity (a_w) and addition of preservatives such as organic acids, spices and curing (nitrate/nitrite) salts. The development of whole-muscle and/or restructured jerky from a range of meats by employing various curing ingredients (e.g. as organic acids, spices, sugars, NaCl and nitrate/nitrite salts), curing methods and drying conditions have been widely reported (Choi, Jeong, Han, Choi, Kim, Lee, et al., 2008; Jang, Kim, Hwang, Song, Kim, Ham, et al., 2015; Kucerova, Hubackova, Rohlik, & Banout, 2015). Most recently, the application of starter culture (e.g. lactic acid bacteria) to improve

flavour and quality of jerky products, while preventing the growth of spoilage bacteria, has been reported (Biscola, Todorov, Capuano, Abriouel, Gálvez, & Franco, 2013; O'Connor, Ross, Hill, & Cotter, 2015; Zhao, Zhao, Lu, Huang, He, Tan, et al., 2016).

The application of ultrasound has been reported to enhance mass transfer rates during brining/curing of meat, primarily by disrupting the continuity of cellular membranes due to various physical and chemical effects of ultrasound (C Ozuna, Cárcel, García-Pérez, Peña, & Mulet, 2015). Ultrasound, in combination with vacuum application has been shown to enhance the drying rate of beef and chicken meat (Başlar, Kılıçlı, Toker, Sağdıç, & Arici, 2014). Ultrasound pre-treatment is widely reported to accelerate drying of a range of food products (Awad, Moharram, Shaltout, Asker, & Youssef, 2012), which can affect texture and water activity of products. Additionally, ultrasound treatment has shown promise in improving meat tenderisation, depending on the ultrasonic intensities and processing times employed.

Moisture content is the main factor influencing the quality, safety and shelf life of meat-based jerky. Conventionally, the moisture content of commercial forms of jerky is determined by oven drying methods and sensory assessments. However, these methods are tedious, time-consuming, expensive and require trained and skilled personnel. Thus, there is a great scientific and industrial interest to develop a rapid, non-destructive and online method for determination of moisture content and drying degree in order to ensure consistent jerky quality. Low-field nuclear magnetic resonance (LF-NMR) is a sensitive, fast and non-invasive technique which has been widely adopted as an analytical technique for the characterization of water mobility and distribution within food matrices (Agudelo-Laverde et al., 2014; Troutman et al., 2001; Haiduc and van Duynhoven, 2005). The state and distribution of water in food matrices, including meat, can be determined by LF-NMR and can provide useful information about interactions between water and myofibrillar meat proteins, as it is governed by exchange of water protons and exchangeable protons in proteins (Bertram, Engelsen, Busk, Karlsson, & Andersen, 2004). LF-NMR has been successfully employed to study the effectiveness of various processing techniques, including; brining, cooking, freezing and thawing on water distribution and mobility (Bertram, Kohler,

Böcker, Ofstad, & Andersen, 2006; Damez & Clerjon, 2013; C. Li, Liu, Zhou, Xu, Qi, Shi, et al., 2012; Ojha, Keenan, Bright, Kerry, & Tiwari, 2016; Sánchez-Alonso, Moreno, & Careche, 2014). This technique has also been suggested as an alternative method for the conventional determination of drying degree upon the quality of chicken jerky (M. Li, Wang, Zhao, Qiao, Li, Sun, et al., 2014).

The objective of this study was to investigate the use of ultrasound as a pre-treatment prior to hot air convective drying of cultured and uncultured beef jerky. Modelling approaches were used to assess the influence of ultrasound frequency on the drying kinetics of beef jerky samples. Another objective of this study was to demonstrate a feasibility of using LF-NMR to determine water mobility and distribution of water during drying of cultured and uncultured beef jerky samples. Correlation analysis of transverse relaxation times and the moisture contents of dried beef jerky at different drying intervals were also determined to evaluate the drying degree of cultured and uncultured beef jerky samples.

2. Materials and methods

2.1. Sample preparation and ultrasonic pre-treatment

Beef used in this study was *Musculus Semitendinosus* which was obtained from a local supplier (Dublin Meat Company, Blanchardstown, Co. Dublin, Ireland). Meat was stored at 4°C, sliced to 0.2 cm in thickness using a meat slicer and were further cut by knife into slices of uniform dimensions (Length= 10 cm, Width = 4 cm). The beef slices were cured using two different curing solutions: (I) Cultured, containing 70% water, *L. sakei* DSM 15831 culture, 1.5% salt, 1.0% sugar, 0.05% sodium nitrite and (II) Uncultured, containing 70% water, 1.5% salt, 1.0% sugar, 0.05% sodium nitrite (based on raw meat weight; v/w). The ingredients were thoroughly mixed, and samples from both cultured and uncultured treatment groups were subjected to ultrasonic (US) pre-treatments at frequencies of 25 kHz (Model: Elma IT H5), 33 kHz (Model: Jencons-PLS S1000) and 45 kHz (Model: Elma IT H5) for 30 min at comparable output power of circa 65 W along with a control (no US pre-treatment). US pre-treatments

were performed in ultrasonic bath systems maintained at a temperature of 30°C. All samples were subsequently cured for 18 h at 4°C.

2.2. Drying of Beef Jerky

Cultured and uncultured cured beef jerky slices were dried using a hot air drying oven (Gallendkamp Plus II, Weiss Technik, UK) at a temperature of 60°C for 4 h and using an air velocity which was maintained at 0.3 m/s. Beef jerky samples were placed in trays and were transferred to the hot air drying oven. Two slices from each treatment were withdrawn after every 30 min for 4 h and subsequently weight using precise weighing balance (Sartorius, Germany), after weight determination slices were placed back to the oven.

2.3. Mathematical modelling

Moisture content, on a dry basis, is the weight of moisture present in the product per unit weight of dry matter in the product. For drying experiments, where weight losses were recorded, the instantaneous moisture contents at any given time can be obtained from Eq.1:

$$M = \frac{(M_o + 1)W_o}{W_t} - 1 \quad \text{Eq. 1}$$

Where W_o is the initial weight (g) of jerky sample after a curing period of 18 h, W_t is the weight (g) of sample at time t (min) and M_o is the initial moisture content (g water/g dry solids), respectively. The initial moisture content was determined using the hot air oven method as per AOAC. The data obtained experimentally for control and ultrasound pre-treated beef jerky slices from both uncultured and cultured groups were plotted as a dimensionless variable moisture ratio (MR) *versus* time as calculated from Eq. 2:

$$\text{Moisture ratio (MR)} = \frac{(M_t - M_e)}{(M_o - M_e)} \quad \text{Eq.2}$$

Where M_t is the moisture content at any time t , M_e the equilibrium moisture content and M_0 is the initial moisture content and all expressed as g water/g dry solids. The value of the equilibrium moisture content (M_e) is relatively small compared to M_t or M_0 . Thus, Eq. (1) can be simplified as $MR = M_t/M_0$ (Ju, El-Mashad, Fang, Pan, Xiao, Liu, et al., 2016; Xie, Mujumdar, Fang, Wang, Dai, Du, et al., 2017). Moisture diffusivity (D_f) for beef jerky samples were calculated by using Eq. 3 by analogy to the analytical solution to the Fick's second law of diffusion assuming negligible shrinkage, constant temperature, and constant moisture diffusivity (Zielinska & Michalska, 2016).

$$MR = \frac{8}{\pi^2} \exp \left[-\frac{\pi^2 D_f t}{4L^2} \right] \quad \text{Eq.3}$$

Where, D_f is the effective moisture diffusivity (m^2/min), L is the thickness of the sliced beef (m).

Six empirical models were employed to describe drying kinetics were Henderson and Pabis, Wang and Singh, Page, Lewis (Newton), Weibull and Peleg (Table 1). The regression coefficient (R^2), Root mean square error (RMSE) and AICc (Akaike information criterion) values were calculated using Eq. 4 – 6, respectively. R^2 , RMSE and AICc values were used as the primary criteria for measuring best model fit.

$$R^2 = \frac{\sum_{i=1}^N (MR_i - MR_{pred,i}) \times \sum_{i=1}^N (MR_i - MR_{exp,i})}{\sqrt{\left[\sum_{i=1}^N (MR_i - MR_{pred,i})^2 \right] \times \left[\sum_{i=1}^N (MR_i - MR_{exp,i})^2 \right]}} \quad \text{Eq.4}$$

$$RMSE = \sqrt{\frac{1}{N} \sum_{i=1}^N (MR_{exp,i} - MR_{pred,i})^2} \quad \text{Eq.5}$$

$$AICc = 2n - 2\log_e(\mathcal{L}(\hat{\theta}|y)) + \frac{2n(n+1)}{N-n-1} \quad \text{Eq. 6}$$

132

133 Where, $MR_{exp,i}$ is moisture content observed experimentally and $MR_{pre,i}$ is predicted moisture
 134 content; SSE is the sum of squared error, $2\log_e(\mathcal{L}(\hat{\theta}|y))$ is the log-likelihood at its maximum point of
 135 the model estimated, N and n represent the number of observations and parameters assessed,
 136 respectively.

137 2.2. LF-NMR transverse relaxation measurements

138 LF-NMR transverse relaxation measurements were carried out using a method described by
 139 McDonnell, Allen, Duggan, Arimi, Casey, Duane, et al. (2013) using a Maran Ultra instrument (Oxford
 140 Instruments, Abington, Oxfordshire, UK) resonating at a frequency of 23.2 MHz. Transverse relaxation
 141 (T_2) times were measured using Carr-Purcell-Meiboom-Gill (CPMG) pulse sequence with the resultant
 142 relaxation decays analysed by tri-exponential unsupervised fitting using RI Win-DXP software
 143 (Version 1.2.3 Oxford Instrument, Abington, Oxfordshire, UK).

144

145 2.4. Statistical data analysis

146 Analysis of variance (ANOVA) was performed using SAS procedure (SAS Version 9.1.3, statistical
 147 Analysis Systems). Tukey's multiple comparison was used to compare treatment means. Pearson's
 148 correlation coefficients were analysed to determine a relationship between moisture content (MC, %) and
 149 TD-NMR relaxation parameters. Correlation coefficients and significance values were determined
 150 using PROC CORR (SAS Version 9.1.3).

151

152 3. Result and Discussion

153 3.1. Drying kinetics

154 The effects of ultrasound frequencies on drying kinetics of marinated (uncultured and cultured) beef
 155 jerky slices are shown in Figure 1(a) & 1(b), respectively. In general, the moisture ratio (MR) decreased

exponentially with time for control and ultrasound pre-treated samples from both cultured and uncultured groups. A variable effect was observed on the drying curves, depending upon culture treatment and ultrasonic frequency, as can be deduced from Figure 1. In general, a fast decrease in the MR [-] was observed for all treatments at initial stages followed by a slow decrease with drying time [min] at a drying temperature of 60°C. The moisture content decreased gradually for all samples, while a fast decrease in moisture content was observed at a frequency of 45 kHz, followed by the control, 25 kHz and 33 kHz, respectively, for cultured samples. In the case of uncultured samples, control samples showed the fastest decrease in moisture content, followed by 45 kHz, 33 kHz and 25 kHz. Previous studies have shown that ultrasound pre-treatment can enhance drying rate for various food matrices (Fernandes, Rodrigues, García-Pérez, & Cárcel, 2015; García-Pérez, Cárcel, Benedito, & Mulet, 2007). However, the effect of ultrasound assisted drying depends largely on food matrix being dried, ultrasonic processing parameters and drying temperature. For example, ultrasound pre-treatment of various food matrices showed a significant decrease in drying time, whereas in some cases, minor improvements were reported (F. A. N. Fernandes, M. I. Gallão, & S. Rodrigues, 2008; A Mulet, Carcel, Sanjuan, & Bon, 2003). Generally, during the drying process, migration of moisture is fast due to the evaporation of surface moisture and decreases exponentially with an increase in drying time due to resistance offered by the matrix to moisture movement. In a study conducted by Başlar, Kılıçlı, Toker, Sağdıç, and Arici (2014), a significant decrease in drying time for ultrasound-assisted, vacuum-drying of chicken and beef meat samples was observed. There are several supporting studies which show that ultrasound enhances drying rate, owing to various mechanisms, thus modifying the diffusion boundary due to acoustic pressure waves, oscillating viscosities, compressions and expansions of materials leading to the formation of micro channels on surfaces which is required for fluid movement (Cárcel, García-Pérez, Benedito, & Mulet, 2012; A Mulet, Cárcel, Benedito, Rosselló, & Simal, 2003; Yao, 2016). Variation in drying rate in this study may be due to the diffusion of marination solution into the meat matrix due to the formation of micro channels on surfaces. Studies have shown that ultrasound

application can increase brine diffusion rate into a range of meat matrices (J. A. Cárcel, J. Benedito, J. Bon, & A. Mulet, 2007; A. Mulet, Cárcel, Sanjuán, & Bon, 2003; César Ozuna, Puig, García-Pérez, Mulet, & Cárcel, 2013). This may occur due to ultrasound assisted microinjection of brine into meat through the formation of microjets as a result of asymmetric cavitation near the solid surface of the product (Mason & Lorimer, 2002). However, it has been reported that no linear increase in diffusion of brine solution into meat matrices was observed with respect to ultrasonic intensity (McDonnell, Lyng, Arimi, & Allen, 2014).

The successful application of ultrasound on meat drying rates has been reported, however, the mechanism of action is not yet clear. In this study, the effect of ultrasound frequency on drying rate for both uncultured and cultured samples was probably due to the effect of ultrasound on lactobacillus culture and diffusion of marination solution into the beef jerky samples. A significant moisture change was observed in marinated beef jerky samples after 18 h marination for ultrasonic pre-treated samples compared to fresh beef (72.0%). For uncultured samples treated, at the lowest ultrasound frequency (25 kHz), a gain of 6.04% was observed whereas for 33 kHz and 45 kHz pre-treatments moisture gains of 5.60 % and 6.15%, respectively, were observed. In the case of cultured samples, no significant moisture gain was observed for the control group, whereas moisture gains of 5.12%, 4.11% and 3.58% were observed for ultrasound pre-treatments 33 kHz, 25 kHz and 45 kHz, respectively.

The observed changes were mainly due to uptake of marination solution. Similar gains in moisture have been reported for ultrasound pre-treatment prior to drying of fruit (F. A. Fernandes, M. I. Gallão, & S. Rodrigues, 2008; Oliveira, Gallão, Rodrigues, & Fernandes, 2011). However, in some cases, solid losses during ultrasound pre-treatments were also reported (Kadam, Tiwari, & O'Donnell, 2015; Oliveira, Gallão, Rodrigues, & Fernandes, 2011). A concentration gradient of soluble solids between beef slices and the marination solution resulted in water gain after pre-treatment and subsequent incubation. Increase in moisture uptake has been reported for marinated beef products, including; pork, poultry and beef, depending on composition of marination solution. Aktaş and Kaya (2001) observed an

increase in moisture uptake for beef *Longissimus dorsi* muscle after marination at 4°C for 24 h. In this study, moisture uptake was observed for ultrasound pre-treated samples, whereas no significant change in moisture uptake was observed for control samples. Research carried out by J. Cárcel, J. Benedito, J. Bon, and A. Mulet (2007) on ultrasound-assisted brine diffusion of pork muscle showed no significant change in moisture uptake in samples subjected to static brining and found that moisture uptake was dependent on ultrasonic intensity at a constant frequency of 20 kHz. Limited studies with muscle-based foods have, like this present study, also highlighted moisture uptake as a result of ultrasound pre-treatment in the case of Halal and non-Halal chicken breast (Leal-Ramos, Alarcon-Rojas, Mason, Paniwnyk, & Alarjah, 2011).

3.2. Drying models

Non-linear regression analysis was carried out for six drying models as a function of drying time and moisture ratio and various statistical parameters (R^2 , RMSE and AICc) were determined to measure the goodness of model fit. Model and statistical parameters (of drying models are listed in Table 1. For all models R^2 ranged from 0.941 to 0.998, RMSE ranged from 0.006 to 0.075 and AICc values ranged from -105.40 to -50.43. For beef jerky samples investigated, the Wang and Singh model had the closest fit to the drying experimental data, as evident from the high R^2 values (≥ 0.994) and the low RMSE (≤ 0.023) and low AICc (< -74.535) values for both cultured and uncultured jerky samples. Model parameters (a and b) obtained by fitting the Wang and Singh model indicated that the relative magnitude of the parameter accurately reflects drying behaviour. Drying constant values (a) were in the range of $-5.98 \times 10^{-3} \text{ min}^{-1}$ to $-3.2 \times 10^{-3} \text{ min}^{-1}$ for uncultured and $-6.73 \times 10^{-3} \text{ min}^{-1}$ to $-3.39 \times 10^{-3} \text{ min}^{-1}$ for cultured jerky samples, whereas, drying constant values (b) varied from $-4.22 \times 10^{-7} \text{ min}^{-2}$ to $9.28 \times 10^{-6} \text{ min}^{-2}$ for uncultured and $1.23 \times 10^{-6} \text{ min}^{-2}$ to $1.22 \times 10^{-5} \text{ min}^{-2}$ cultured samples. Model parameter (a) was lowest in the case of 45 kHz and highest for 33 kHz for cultured samples, whereas,

in the case of uncultured samples it was lowest for control samples and highest for 25 kHz samples. The lower (a) values reflect the higher moisture removal rates. A similar trend was also observed for drying kinetics when fitted to other models. Various models have been proposed to model drying kinetics of various food products, including; beef and chicken (Başlar, Kılıçlı, Toker, Sağdıç, & Arici, 2014). Drying behaviour can be predicted using a range of models, however, in this study the Wang and Singh model was found to be the best fit. Best model fit can be judged based on various statistical parameters, however; AICc and RMSE values were the criteria used for model selection, because R^2 alone cannot be judged for model fitting. AICc tends to have performance advantages over other criteria for model fitting (Burnham, Anderson, & Huyvaert, 2011). AICc value rises with an increase in the number of model parameters and the lower the AICc value, the better is the model performance. AICc criteria has been adopted by several researchers to test the performance of drying kinetics models (Buttchereit, Stamer, Junge, & Thaller, 2010; Gowen, Abu-Ghannam, Frias, & Oliveira, 2008; Kadam, Tiwari, & O'Donnell, 2015). The D_f value of the of cultured and uncultured beef samples ranged between 0.90 to $1.33 \times 10^{-8} \text{ m}^2.\text{min}^{-1}$ and 0.83 to $1.45 \times 10^{-8} \text{ m}^2.\text{min}^{-1}$, respectively, as shown in Figure 2. The highest D_f value was observed for control uncultured samples, and cultured samples pre-treated at 45 kHz. D_f value was found to increase with an increase in ultrasonic frequency in the case of uncultured samples, however, values remained significantly lower for control jerky samples in all cases. Calculated D_f values were within the range (10^{-8} to $10^{-10} \text{ m}^2/\text{s}$) of those previously reported for drying of biological materials (Başlar, Kılıçlı, Toker, Sağdıç, & Arici, 2014; Zogzas, Maroulis, & Marinou-Kouris, 1996).

3.3. Water mobility by TD-NMR relaxometry

A representative LF-NMR T_2 transverse measurement for uncultured and cultured samples after 18 h marination (i.e. before drying) and after the 4 h drying period is shown in Figure 3. Distributed exponential analysis of curve obtained for various samples revealed the presence of three distinct peaks obtained at relaxation time ranges of $0\text{--}10 \text{ ms}$ (T_{2b}), $10\text{--}100 \text{ ms}$ (T_{21}) and $>100 \text{ ms}$ (T_{22})

respectively. These peaks can be attributed to various fractions of water present in beef jerky samples. The first peak obtained at the shortest relaxation time (T_{2b}) represents bound water which is closely associated with macromolecules (mainly proteins). The second peak at T_{21} represents water present within the dense myofibrillar protein matrix, whereas, the third peak at T_{22} can be attributed to free-water present outside the myofibrillar protein matrix. Presence of three water fractions at relaxation times and their association with muscle proteins has been previously reported (Huff-Lonergan & Lonergan, 2005; Pearce, Rosenvold, Andersen, & Hopkins, 2011). Ultrasound pre-treatment showed a shift in peaks for uncultured samples compared to cultured samples after 18 h of marination or 0 h drying (Figure 3a&b). In the case of cultured control samples, a higher level of bound water fraction was observed with a decrease in ultrasound pre-treated (Figure 3a), whereas, a shift in peaks were observed in the case of uncultured samples (Figure 3b). In this study, the largest fraction of water present in beef jerky samples was observed at T_{21} for cultured (in the range of 84.74–78.87%) and uncultured (90.51 to 66.47%) samples after 18 h of marination, whereas, during drying at 60°C, the proportion of water obtained at T_{21} was found to decrease with an increase in water proportion at T_{2b} . An increase in water fraction at T_{21} indicates an increase in the number of protons in the intra-myofibrillar space. Whereas, an increased water fraction at T_{22} population indicates a similar rise in number of protons, thereby representing an increase in the extra myofibrillar water population (Pearce, Rosenvold, Andersen, & Hopkins, 2011). An increase in the proportion of water at T_{2b} suggests a reduction in myofibrillar moisture and an increase in the bound water fraction obtained at T_{2b} due to the removal of myofibril and free-moisture during drying. Similar increases in the bound water fraction, indicating moisture mobility, was reported for beef granules during drying within a temperature range of 40–60°C (X. Li, Ma, Tao, Kong, & Li, 2012). Analysis of variance showed that culture and drying time were the significant factors for all three relaxation times, whereas, ultrasound frequency was a significant factor for T_{21} ($p=0.0001$), T_{22} ($p=0.0010$) and an insignificant factor for T_{2b} . Interaction effects of drying time with culture and ultrasound frequency were significant for relaxation time and water

proportion. Similar, changes for water population at T_{21} and T_{22} relaxation times were also reported for ultrasound-assisted brining of pork samples in a study which concluded that a reduction in the T_{21} population and an increase in the T_{22} population may be due to increased salt intake and a change in physical properties of meat during the curing process (Ojha, Keenan, Bright, Kerry, & Tiwari, 2016). The increased intake of curing solution owing to ultrasound pre-treatment can cause an enlarged electrostatic repulsion within myofibrils, thereby resulting in water mobility and osmotic dehydration (Vestergaard, Andersen, & Adler-Nissen, 2007).

A plot of moisture content (MC, %) and T_{22} relaxation time (free-water) indicated that a change in relaxation time is related to the MC of cultured and uncultured beef jerky samples (Figure 4). Similarly, (2014) showed a relationship between T_{21} and T_{22} with water holding capacity of tofu. Hence, moisture population data obtained from NMR can be used for indirect prediction of key moisture related measurements. In this study, a strong positive correlation was observed between MC and T_{22} ($r=0.790$, $p<0.0001$) and proportion of water at T_{22} (P_2) ($r=0.709$, $p<0.0001$) indicating that the MC of beef jerky samples is mainly associated with free-water. Correlation analysis also showed a strong positive relationship between drying time (h) and various water fractions and relaxation times (Table 2), with the exception of T_{2b} , whereas, a significant negative relationship was observed between water fraction associated with T_{2b} . This is probably due to a shift in relaxation time during the drying process.

4. Conclusion

This study demonstrates that ultrasound pre-treatment have significant effect on drying behaviour and moisture mobility of cultured and uncultured beef jerky samples. However, improvement in drying rates for both cultured and uncultured samples was not evident from the drying models generated. Significant increases in moisture gain after ultrasonic pre-treatment promoted brine uptake due to the combined effect of cavitation and concentration gradient phenomena. Among several drying models tested to predict the drying behaviour of beef jerky samples, the Wang and Singh drying model was found to be

the best model as demonstrated by high R^2 , low RMSE and AICc values. LF-NMR results showed moisture mobility during drying process with strong correlation with MC of jerky samples. LF-NMR can be employed to elucidate changes in water distribution and moisture content of beef jerky samples.

Nomenclature

LF-NMR: Low Frequency-Nuclear Magnetic Resonance

W_o : Initial weight [g]

W_t : Weight [g] at time t

t : time [min]

M_o : Initial moisture content [g water/g dry solids]

M_t : is the moisture content at any time t ,

M_e : Equilibrium moisture content

D_f : Effective moisture diffusivity [m^2/min],

L : The thickness of the sliced beef [m]

MR: Moisture ratio [–]

R^2 : The regression coefficient,

RMSE: Root mean square error

AICc: Akaike information criterion

MC: Moisture content [%]


T_{2b} T_{21} and T_{22} : Relaxation time (ms)

5. References

- Aktaş, N., & Kaya, M. (2001). The influence of marinating with weak organic acids and salts on the intramuscular connective tissue and sensory properties of beef. *European Food Research and Technology*, 213(2), 88-94.
- Awad, T., Moharram, H., Shaltout, O., Asker, D., & Youssef, M. (2012). Applications of ultrasound in analysis, processing and quality control of food: A review. *Food Research International*, 48(2), 410-427.
- Başlar, M., Kılıçlı, M., Toker, O. S., Sağdıç, O., & Arici, M. (2014). Ultrasonic vacuum drying technique as a novel process for shortening the drying period for beef and chicken meats. *Innovative Food Science & Emerging Technologies*, 26, 182-190.
- Bertram, H. C., Engelsen, S. B., Busk, H., Karlsson, A. H., & Andersen, H. J. (2004). Water properties during cooking of pork studied by low-field NMR relaxation: effects of curing and the RN-- gene. *Meat Science*, 66(2), 437-446.
- Bertram, H. C., Kohler, A., Böcker, U., Ofstad, R., & Andersen, H. J. (2006). Heat-induced changes in myofibrillar protein structures and myowater of two pork qualities. A combined FT-IR spectroscopy and low-field NMR relaxometry study. *Journal of Agricultural and Food Chemistry*, 54(5), 1740-1746.
- Biscola, V., Todorov, S., Capuano, V., Abriouel, H., Gálvez, A., & Franco, B. (2013). Isolation and characterization of a nisin-like bacteriocin produced by a *Lactococcus lactis* strain isolated from charqui, a Brazilian fermented, salted and dried meat product. *Meat Science*, 93(3), 607-613.
- Burnham, K. P., Anderson, D. R., & Huyvaert, K. P. (2011). AIC model selection and multimodel inference in behavioral ecology: some background, observations, and comparisons. *Behavioral Ecology and Sociobiology*, 65(1), 23-35.
- Buttchereit, N., Stamer, E., Junge, W., & Thaller, G. (2010). Evaluation of five lactation curve models fitted for fat: protein ratio of milk and daily energy balance. *Journal of Dairy Science*, 93(4), 1702-1712.
- Cárcel, J., Benedito, J., Bon, J., & Mulet, A. (2007). High intensity ultrasound effects on meat brining. *Meat Science*, 76(4), 611-619.
- Cárcel, J., García-Pérez, J., Benedito, J., & Mulet, A. (2012). Food process innovation through new technologies: Use of ultrasound. *Journal of Food Engineering*, 110(2), 200-207.
- Cárcel, J. A., Benedito, J., Bon, J., & Mulet, A. (2007). High intensity ultrasound effects on meat brining. *Meat Science*, 76(4), 611-619.
- Choi, J.-H., Jeong, J.-Y., Han, D.-J., Choi, Y.-S., Kim, H.-Y., Lee, M.-A., Lee, E.-S., Paik, H.-D., & Kim, C.-J. (2008). Effects of pork/beef levels and various casings on quality properties of semi-dried jerky. *Meat Science*, 80(2), 278-286.
- Damez, J.-L., & Clerjon, S. (2013). Quantifying and predicting meat and meat products quality attributes using electromagnetic waves: An overview. *Meat Science*, 95(4), 879-896.
- Fernandes, F. A., Gallão, M. I., & Rodrigues, S. (2008). Effect of osmotic dehydration and ultrasound pre-treatment on cell structure: Melon dehydration. *LWT-Food Science and Technology*, 41(4), 604-610.
- Fernandes, F. A., Rodrigues, S., García-Pérez, J. V., & Cárcel, J. A. (2015). Effects of Ultrasound-Assisted Air Drying on Vitamins and Carotenoids of Cherry Tomatoes. *Drying Technology*(just-accepted).
- Fernandes, F. A. N., Gallão, M. I., & Rodrigues, S. (2008). Effect of osmotic dehydration and ultrasound pre-treatment on cell structure: Melon dehydration. *LWT - Food Science and Technology*, 41(4), 604-610.
- García-Pérez, J., Cárcel, J., Benedito, J., & Mulet, A. (2007). Power ultrasound mass transfer enhancement in food drying. *Food and Bioprocesses Processing*, 85(3), 247-254.
- Gowen, A., Abu-Ghannam, N., Frias, J., & Oliveira, J. (2008). Modeling dehydration and rehydration of cooked soybeans subjected to combined microwave-hot-air drying. *Innovative Food Science & Emerging Technologies*, 9(1), 129-137.

- Huff-Lonergan, E., & Lonergan, S. M. (2005). Mechanisms of water-holding capacity of meat: The role of postmortem biochemical and structural changes. *Meat Science*, 71(1), 194-204.
- Jang, S.-J., Kim, H.-W., Hwang, K.-E., Song, D.-H., Kim, Y.-J., Ham, Y.-K., Lim, Y.-B., Jeong, T.-J., Kim, S.-Y., & Kim, C.-J. (2015). Effects of Replacing Sucrose with Various Sugar Alcohols on Quality Properties of Semi-dried Jerky. *Korean Journal for Food Science of Animal Resources*, 35(5), 622.
- Ju, H.-Y., El-Mashad, H. M., Fang, X.-M., Pan, Z., Xiao, H.-W., Liu, Y.-H., & Gao, Z.-J. (2016). Drying characteristics and modeling of yam slices under different relative humidity conditions. *Drying Technology*, 34(3), 296-306.
- Kadam, S. U., Tiwari, B. K., & O'Donnell, C. P. (2015). Effect of ultrasound pre-treatment on the drying kinetics of brown seaweed *Ascophyllum nodosum*. *Ultrasonics Sonochemistry*, 23, 302-307.
- Kucerova, I., Hubackova, A., Rohlik, B.-A., & Banout, J. (2015). Mathematical Modeling of Thin-Layer Solar Drying of Eland (*Taurotragus oryx*) Jerky. *International Journal of Food Engineering*, 11(2), 229-242.
- Leal-Ramos, M. Y., Alarcon-Rojo, A. D., Mason, T. J., Paniwnyk, L., & Alarjah, M. (2011). Ultrasound-enhanced mass transfer in Halal compared with non-Halal chicken. *Journal of the Science of Food and Agriculture*, 91(1), 130-133.
- Li, C., Liu, D., Zhou, G., Xu, X., Qi, J., Shi, P., & Xia, T. (2012). Meat quality and cooking attributes of thawed pork with different low field NMR T 21. *Meat Science*, 92(2), 79-83.
- Li, M., Wang, H., Zhao, G., Qiao, M., Li, M., Sun, L., Gao, X., & Zhang, J. (2014). Determining the drying degree and quality of chicken jerky by LF-NMR. *Journal of Food Engineering*, 139, 43-49.
- Li, T., Rui, X., Li, W., Chen, X., Jiang, M., & Dong, M. (2014). Water distribution in tofu and application of T 2 relaxation measurements in determination of tofu's water-holding capacity. *Journal of agricultural and food chemistry*, 62(34), 8594-8601.
- Li, X., Ma, L. Z., Tao, Y., Kong, B. H., & Li, P. J. (2012). Low field-NMR in measuring water mobility and distribution in beef granules during drying process. In *Advanced Materials Research*, vol. 550 (pp. 3406-3410): Trans Tech Publ.
- Mason, T. J., & Lorimer, J. P. (2002). Applied sonochemistry. *The uses of power ultrasound in chemistry and processing*, 1-48.
- McDonnell, C. K., Allen, P., Duggan, E., Arimi, J. M., Casey, E., Duane, G., & Lyng, J. G. (2013). The effect of salt and fibre direction on water dynamics, distribution and mobility in pork muscle: A low field NMR study. *Meat science*, 95(1), 51-58.
- McDonnell, C. K., Lyng, J. G., Arimi, J. M., & Allen, P. (2014). The acceleration of pork curing by power ultrasound: A pilot-scale production. *Innovative Food Science & Emerging Technologies*, 26(0), 191-198.
- Mulet, A., Cárcel, J., Benedito, C., Rosselló, C., & Simal, S. (2003). Ultrasonic mass transfer enhancement in food processing. *Transport phenomena of food processing*.
- Mulet, A., Carcel, J., Sanjuan, N., & Bon, J. (2003). New food drying technologies-Use of ultrasound. *Food Science and Technology International*, 9(3), 215-221.
- Mulet, A., Cárcel, J. A., Sanjuán, N., & Bon, J. (2003). New food drying technologies - Use of ultrasound. *Food Science and Technology International*, 9(3), 215-221.
- O'Connor, P. M., Ross, R. P., Hill, C., & Cotter, P. D. (2015). Antimicrobial antagonists against food pathogens: A bacteriocin perspective. *Current Opinion in Food Science*, 2, 51-57.
- Ojha, K. S., Keenan, D. F., Bright, A., Kerry, J. P., & Tiwari, B. K. (2016). Ultrasound assisted diffusion of sodium salt replacer and effect on physicochemical properties of pork meat. *International Journal of Food Science & Technology*, 51(1), 37-45.
- Oliveira, F. I., Gallão, M. I., Rodrigues, S., & Fernandes, F. A. N. (2011). Dehydration of Malay apple (*Syzygium malaccense* L.) using ultrasound as pre-treatment. *Food and Bioprocess Technology*, 4(4), 610-615.

- Ozuna, C., Cárcel, J., García-Pérez, J., Peña, R., & Mulet, A. (2015). Influence of Brine Concentration on Moisture and NaCl Transport During Meat Salting. In *Water Stress in Biological, Chemical, Pharmaceutical and Food Systems*, (pp. 519-525): Springer.
- Ozuna, C., Puig, A., García-Pérez, J. V., Mulet, A., & Cárcel, J. A. (2013). Influence of high intensity ultrasound application on mass transport, microstructure and textural properties of pork meat (*Longissimus dorsi*) brined at different NaCl concentrations. *Journal of Food Engineering*, 119(1), 84-93.
- Pearce, K. L., Rosenvold, K., Andersen, H. J., & Hopkins, D. L. (2011). Water distribution and mobility in meat during the conversion of muscle to meat and ageing and the impacts on fresh meat quality attributes—A review. *Meat Science*, 89(2), 111-124.
- Sánchez-Alonso, I., Moreno, P., & Careche, M. (2014). Low field nuclear magnetic resonance (LF-NMR) relaxometry in hake (*Merluccius merluccius*, L.) muscle after different freezing and storage conditions. *Food chemistry*, 153, 250-257.
- Vestergaard, C., Andersen, B. L., & Adler-Nissen, J. (2007). Sodium diffusion in cured pork determined by ²²Na radiology. *Meat Science*, 76(2), 258-265.
- Xie, L., Mujumdar, A. S., Fang, X.-M., Wang, J., Dai, J.-W., Du, Z.-L., Xiao, H.-W., Liu, Y., & Gao, Z.-J. (2017). Far-infrared radiation heating assisted pulsed vacuum drying (FIR-PVD) of wolfberry (*Lycium barbarum* L.): Effects on drying kinetics and quality attributes. *Food and Bioprocess Processing*, 102, 320-331.
- Yao, Y. (2016). Enhancement of mass transfer by ultrasound: Application to adsorbent regeneration and food drying/dehydration. *Ultrasonics sonochemistry*, 31, 512-531.
- Zhao, C., Zhao, X., Lu, Z., Huang, J., He, S., Tan, H., Wang, G., Li, Y., & Liu, D. (2016). Production of fermented pork jerky using *Lactobacillus bulgaricus*. *LWT-Food Science and Technology*.
- Zielinska, M., & Michalska, A. (2016). Microwave-assisted drying of blueberry (*Vaccinium corymbosum* L.) fruits: Drying kinetics, polyphenols, anthocyanins, antioxidant capacity, colour and texture. *Food chemistry*, 212, 671-680.
- Zogzas, N., Maroulis, Z., & Marinos-Kouris, D. (1996). Moisture diffusivity data compilation in foodstuffs. *Drying Technology*, 14(10), 2225-2253.

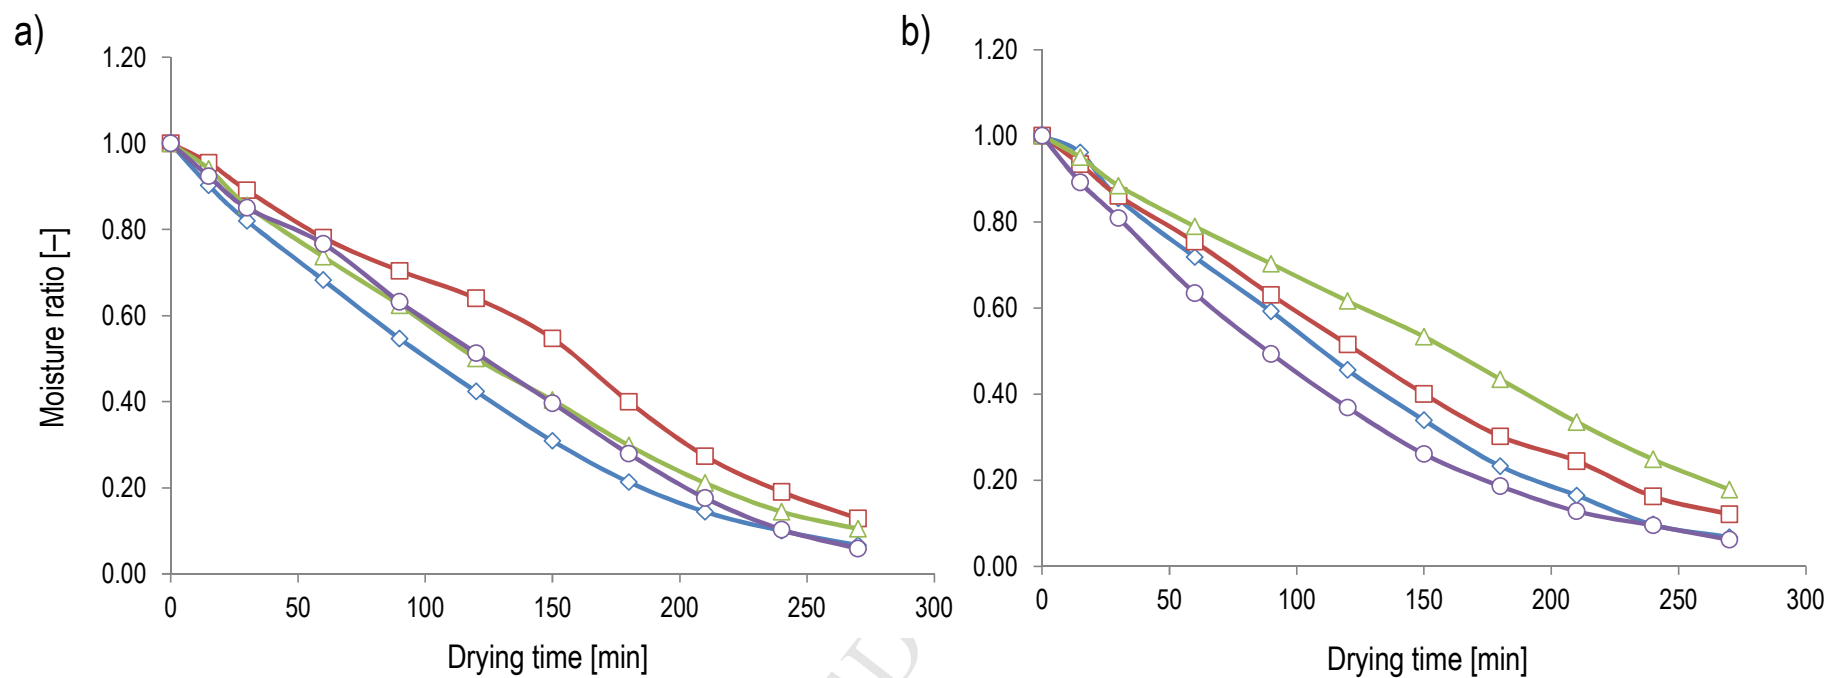

460

461 Figure 1. Moisture ratio [MR] vs. drying time [min] for a) uncultured and (b) cultured beef jerky slices pre-treated at various ultrasonic frequencies [Control (◇), 25
 462 kHz (□), 33 kHz (△) and 45 kHz (○) respectively].

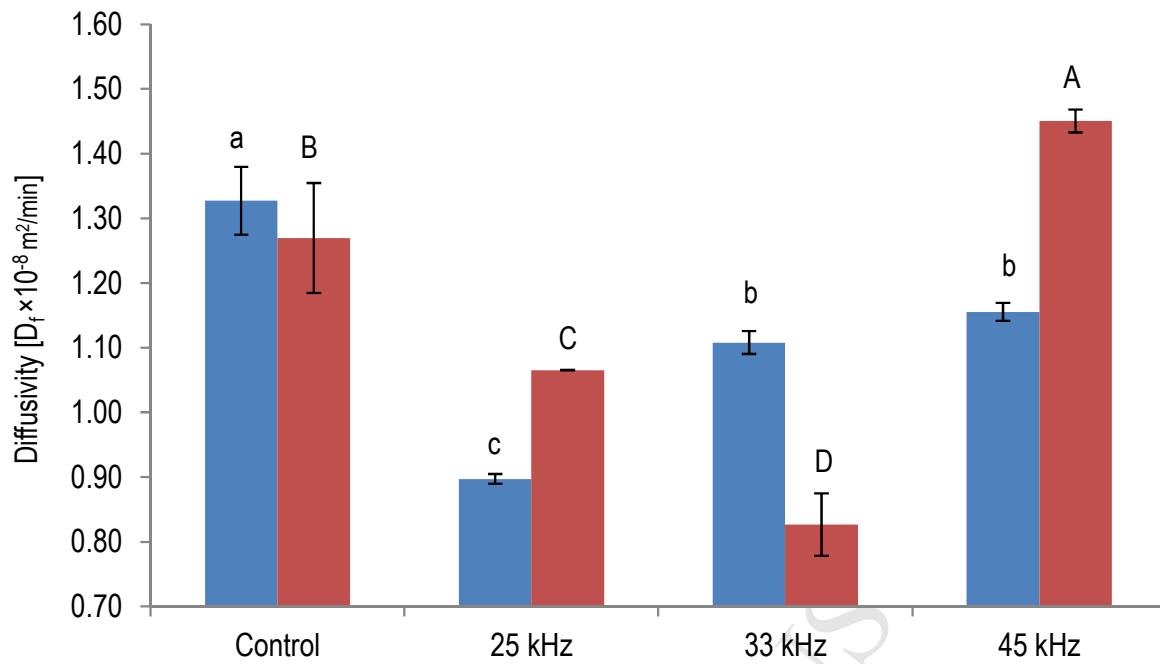


Figure 2. Diffusivity for uncultured and cultured beef jerky samples pre-treated at various ultrasonic frequencies.


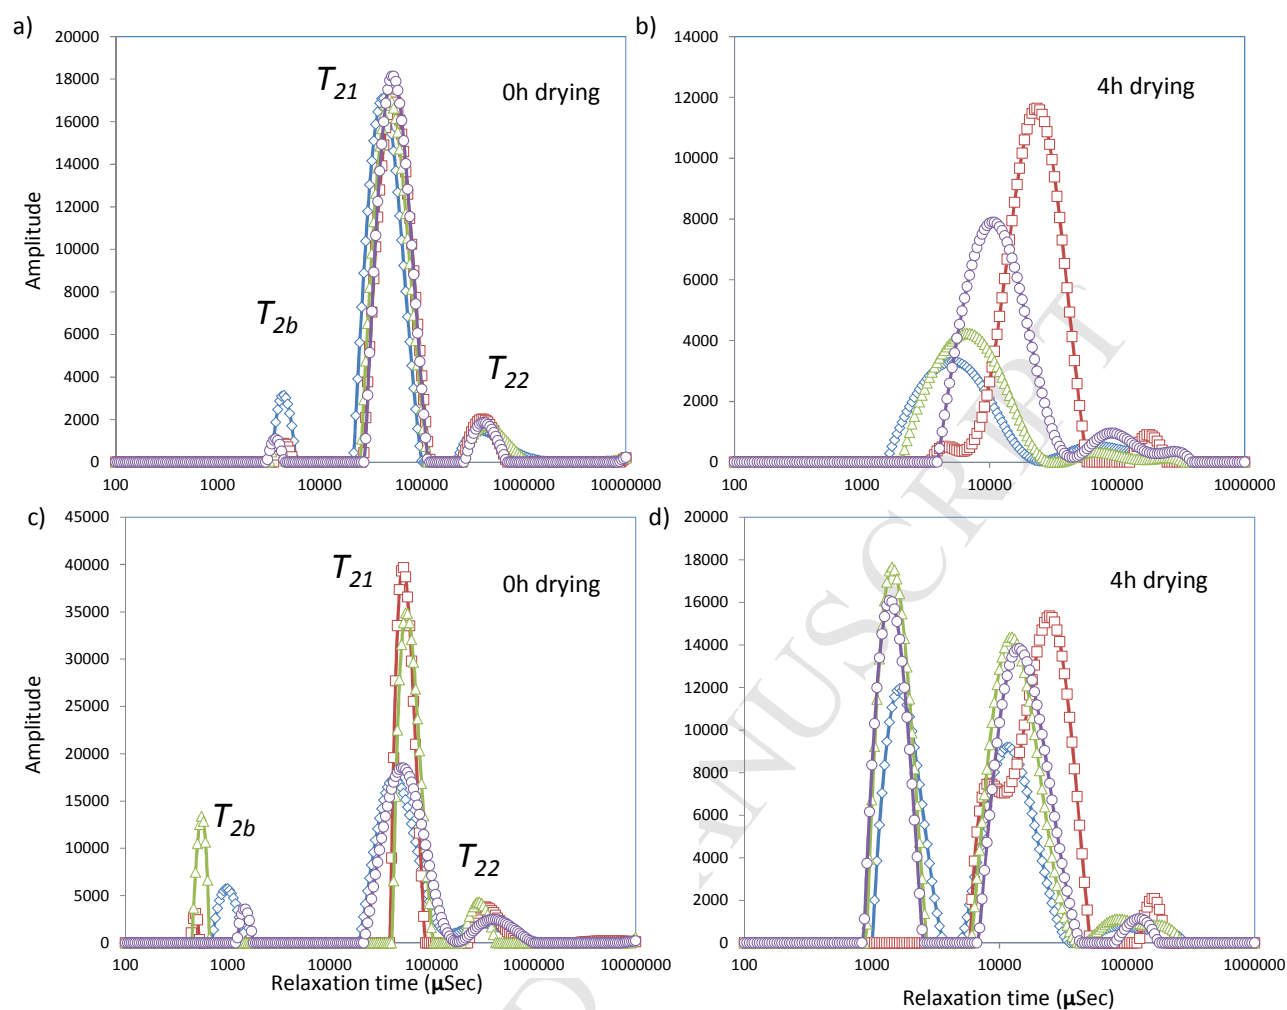


Figure 3. Distribution of multi exponentially fitted transverse relaxation (T_2) data for uncultured (a – b) and cultured (c – d) beef jerky slices pre-treated at various ultrasonic frequencies [Control ($\diamond$), 25 kHz ($\square$), 33 kHz (Δ) and 45 kHz ($\circ$) respectively].

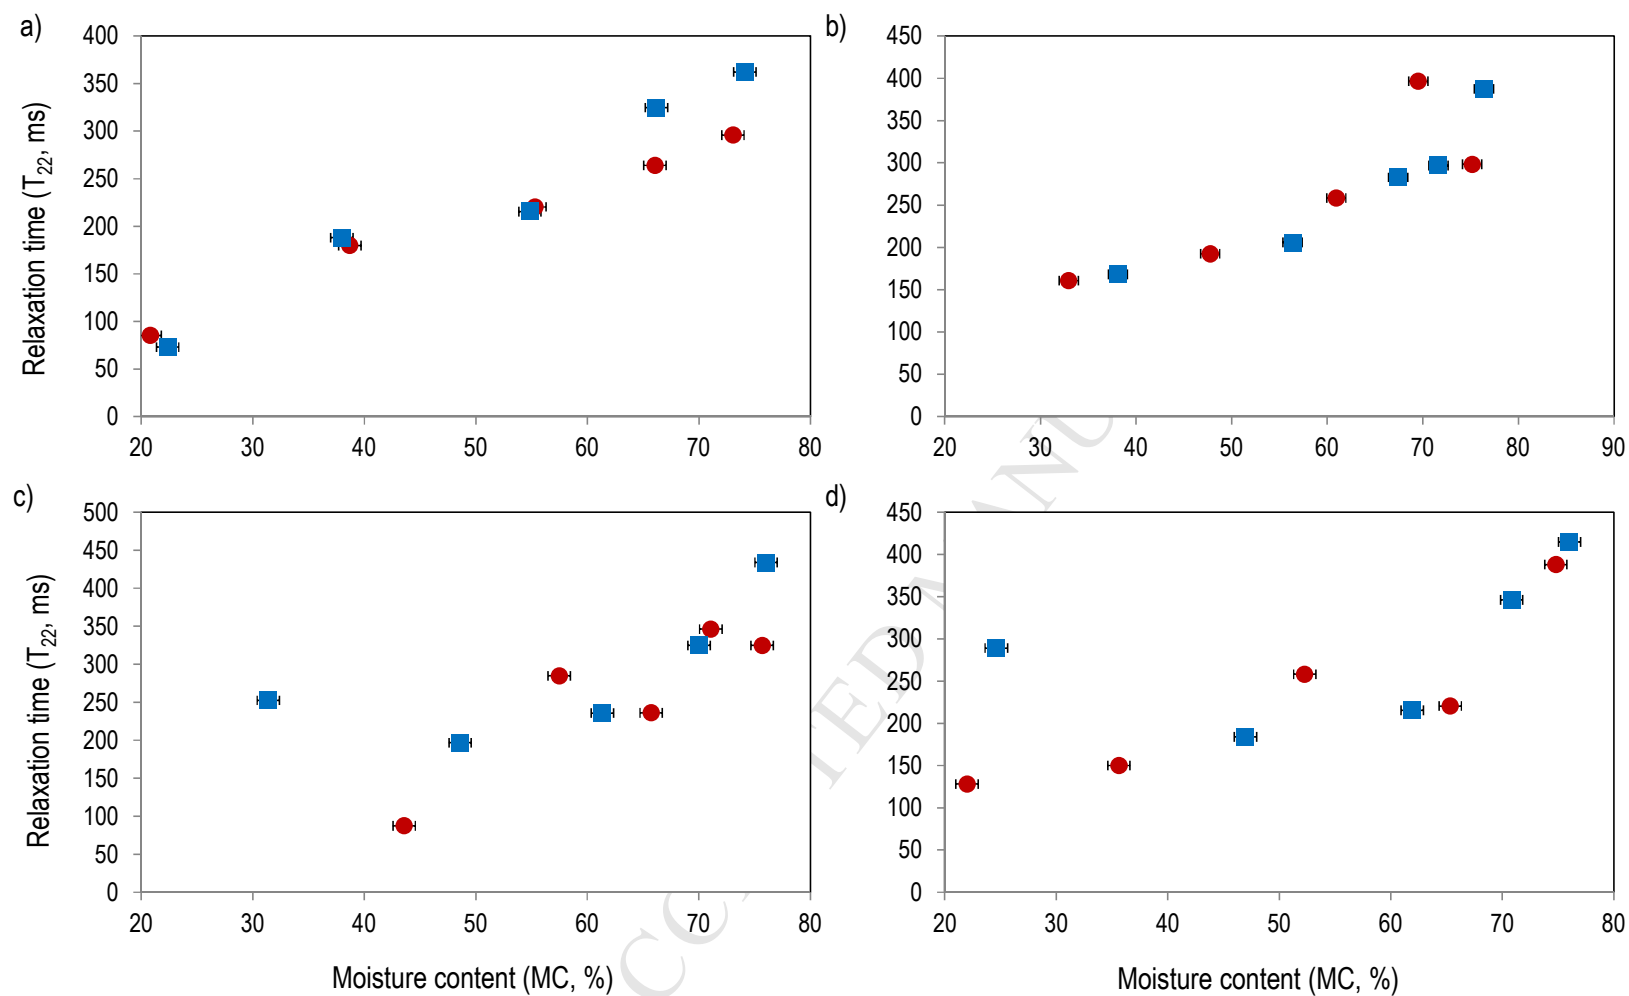

474

475 Figure 4. Relationship between relaxation time (T_{22}) and moisture content of beef samples during drying of cultured (●) and uncultured (●) control (a) and

476 ultrasound pre-treated beef jerky samples at 25 kHz (b), 33 kHz (c) and 45 kHz (d).

477 Table 1: Model parameters obtained from fitting drying models to beef jerky samples along with key statistical parameters

Model	Parameter	Uncultured				Cultured			
		Control	25 kHz	33 kHz	45 kHz	Control	25 kHz	33 kHz	45 kHz
Henderson and Pabis $MR = a \exp(-kt)$	a	1.036	1.057	1.048	1.056	1.068	1.045	1.040	1.031
	k	8.18×10^{-3}	5.53×10^{-3}	6.83×10^{-3}	7.12×10^{-3}	7.82×10^{-3}	6.56×10^{-3}	5.09×10^{-3}	8.94×10^{-3}
	R^2	0.987	0.950	0.982	0.963	0.980	0.984	0.974	0.994
	$RMSE$	0.038	0.069	0.043	0.065	0.049	0.040	0.046	0.026
	$AICc$	-64.230	-50.435	-60.915	-51.810	-58.080	-62.630	-59.260	-71.965
Wang and Singh $MR = 1 + at + bt^2$	a	-5.98×10^{-3}	-3.2×10^{-3}	-4.8×10^{-3}	-4.59×10^{-3}	-5.34×10^{-3}	-4.71×10^{-3}	-3.39×10^{-3}	-6.73×10^{-3}
	b	9.28×10^{-6}	-4.2×10^{-7}	5.28×10^{-6}	3.74×10^{-6}	6.71×10^{-6}	5.22×10^{-6}	1.23×10^{-6}	1.22×10^{-5}
	R^2	0.999	0.994	0.999	0.996	0.997	0.999	0.998	1.000
	$RMSE$	0.010	0.023	0.011	0.020	0.019	0.011	0.012	0.006
	$AICc$	-95.105	-74.535	-90.375	-78.980	-79.380	-90.780	-89.385	-105.400
Page $MR = \exp(-kt^n)$	k	2.49×10^{-3}	3.17×10^{-4}	1.38×10^{-3}	6.56×10^{-4}	1.05×10^{-3}	1.38×10^{-3}	8.35×10^{-4}	3.76×10^{-3}
	n	1.250	1.545	1.319	1.4785	1.392	1.3	1.3465	1.1725
	R^2	0.997	0.984	0.997	0.991	0.998	0.998	0.991	0.999
	$RMSE$	0.019	0.039	0.018	0.032	0.016	0.016	0.027	0.010
	$AICc$	-79.925	-62.775	-79.875	-67.365	-82.830	-83.160	-71.390	-92.330
Lewis (Newton) $MR = \exp(-kt)$	k	7.86×10^{-3}	5.13×10^{-3}	6.45×10^{-3}	6.68×10^{-3}	7.27×10^{-3}	6.22×10^{-3}	4.82×10^{-3}	8.64×10^{-3}
	R^2	0.984	0.941	0.977	0.957	0.972	0.980	0.969	0.993
	$RMSE$	0.042	0.075	0.049	0.071	0.058	0.045	0.051	0.029
	$AICc$	-66.115	-52.575	-62.025	-53.965	-58.060	-63.680	-61.235	-73.125
Weibull $MR = a \exp(-kt^n)$	a	0.9737	0.95545	0.9788	0.955	0.9886	0.9792	0.97	0.9864
	k	1.81×10^{-3}	1.02×10^{-4}	9.56×10^{-4}	2.64×10^{-4}	8.83×10^{-4}	9.80×10^{-4}	4.47×10^{-4}	3.20×10^{-3}
	n	1.323	1.7515	1.382	1.6445	1.425	1.363	1.463	1.2025
	R^2	0.998	0.988	0.997	0.994	0.998	0.998	0.993	0.999
	$RMSE$	0.016	0.034	0.016	0.026	0.015	0.013	0.023	0.009
	$AICc$	-78.310	-60.655	-77.165	-66.835	-78.525	-81.595	-68.960	-89.970
Peleg $MR = 1 - t/(a + bt)$	q	149.2	312.1	199.65	214.1	177.75	203.05	293.45	122.55
	b	0.48645	-0.03865	0.34795	0.23575	0.37325	0.3582	0.12383	0.58215
	R^2	0.997	0.994	0.998	0.996	0.995	0.998	0.998	0.997
	$RMSE$	0.017	0.023	0.014	0.021	0.024	0.014	0.012	0.017
	$AICc$	-81.455	-74.535	-85.955	-77.730	-73.750	-84.980	-89.590	-80.710

478

479 Table 2. Correlation analysis showing a relationship between various parameters

	Time (h)	P_0	P_1	P_2	T_{2b}	T_{21}	T_{22}	MC (%)
Time (h)	1.000	0.507***	-0.437**	-0.762****	0.206 ^{ns}	-0.400*	-0.822****	-0.929****
P_0		1.000	-0.994****	-0.468**	0.144 ^{ns}	0.282 ^{ns}	-0.305 ^{ns}	-0.615****
P_1			1.000	0.366*	-0.136 ^{ns}	-0.323*	0.249 ^{ns}	0.557***
P_2				1.000	-0.123	0.205 ^{ns}	0.565**	0.709****
T_{2b}					1.000	0.386 ^{ns}	0.214 ^{ns}	-0.205 ^{ns}
T_{21}						1.000	0.702****	0.340*
T_{22}							1.000	0.790****
MC (%)								1.000

480 ns:Not significant; *P<0.05; **P<0.01; ***P<0.001; ****P<0.001

481

482

483

Research Highlights

1. Drying behaviour is ultrasonic frequency dependent
2. Ultrasound can enhance marination rates
3. LF-NMR can be employed for water mobility and drying degree of beef jerky.