CORA Cork Open Research Archive
Cartlann Taighde Oscailte Chorcaí

Title	Soft tribology using rheometers: a practical guide and introduction
Authors	Fox, Daniel;Lynch, Kieran M.;Sahin, Aylin W.;Arendt, Elke K.
Publication date	2020-11-30
Original Citation	Fox, D., Lynch, K. M., Sahin, A. W. and Arendt, E. K. (2020) 'Soft Tribology Using Rheometers: A Practical Guide and Introduction', Journal of the American Society of Brewing Chemists, 79(3), pp.213-230. https://doi.org/10.1080/03610470.2020.1843959
Type of publication	Article (peer-reviewed)
Link to publisher's version	https://www.tandfonline.com/doi/full/10.1080/03610470.2020.1843959 - 10.1080/03610470.2020.1843959
Rights	© 2020 American Society of Brewing Chemists, Inc. This is an Accepted Manuscript of an article published by Taylor & Francis in Journal of the American Society of Brewing Chemists on 30 Nov 2020 available online: http://www.tandfonline.com/10.1080/03610470.2020.1843959
Download date	2026-11-06 18:50:35
Item downloaded from	https://hdl.handle.net/10468/10846



UCC
University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Soft tribology using rheometers: a practical guide and introduction

Daniel Fox[a], Kieran M. Lynch[a], Aylin W. Sahin[a] and Elke K. Arendt[b]*

[a] School of Food and Nutritional Sciences, University College Cork, Ireland

[b] School of Food and Nutritional Sciences and APC Microbiome Ireland, University College Cork, Ireland

*Corresponding author: Elke K. Arendt; Mailing address: School of Food and Nutritional Science and APC Microbiome Ireland, University College Cork, Western Road, Cork, Ireland; Phone: +353-21-4902064; Fax: +353-21-4270213; Email: e.arendt@ucc.ie

Keywords: Soft tribology, tribological attachments, rheometer, mouthfeel

Abstract

Soft tribology (i.e. the measurement of friction as a function of speed between two compliant surfaces) has found applications in food science and there is a growing wealth of theoretical and practical knowledge of fundamental mechanisms of lubrication as well as increasingly strong correlations between tribology and sensory data. Soft tribology is generally conducted using either commercial or in-house built tribometers however, the recent decade has seen a rise in the use of rheometers with tribology attachments. As such, soft tribological measurements using rheometers with tribological attachments are fast becoming a tool in the food scientists' toolbox when it comes to measuring mouthfeel, but the lack of fundamental studies and standardised measuring protocols makes interpretation and comparison across studies challenging. This review aims to provide an introduction to the basics of soft tribology as well as summarise current methodologies and fundamental knowledge on using rheometers for tribological measurements. Based on current literature, knowledge gaps and potential avenues for future research have been identified. These include investigations on hydrophobicity of surfaces, surface wear (running-in), cleaning procedure of the attachment and tribopairs, speed (range and method of increase/decrease) and measuring system configuration. Leaving the aim and design of experiments at the discretion of the individual researcher, recommendations for food scientists aiming to conduct studies on soft tribology of food are given, with a focus on reporting for better comparison between studies.

Table of Contents

1 Introduction 1
2 Fundamentals of soft tribology 5
2.1 Tribology is a system property 5
2.2 Quantifying mouthfeel 6
2.3 Surfaces – approximation to the physiology of the mouth 7
2.3.1 Saliva 9
2.4 Stribeck curves 11
2.5 Analysing tribological data – deviating from the classic Stribeck curve 12
2.6 Rheometers with tribo-attachments (instruments) 14
3 Tribology using rheometers 15
3.1 Approaches to tribological studies 15
3.2 Methodologies 17
3.2.1 Tribological attachments 18
3.2.2 Surfaces 18
3.2.3 Running-in 21
3.2.4 Entrainment speed and normal force 22
3.2.5 Temperature 25
3.2.6 Cleaning of the tribopairs 25
3.3 Data processing 27
4 Linking tribology and sensory 28
5 Conclusions 31
6 References 34

1 Introduction

"Mouthfeel" is a self-explanatory term for something very difficult to define: it encompasses the tactile sensations experienced during mastication, but going beyond "good" and "bad" and separating those sensations into meaningful terms and correlating them with instrumental measurements requires a developed palate, vocabulary and methodology. The mouthfeel of a given product is an important determinant of the liking and acceptance by consumers (Guinard & Mazzucchelli, 1996), and product developers of food and beverages (referred to collectively as food in this review) are therefore often interested in measuring mouthfeel in order to optimise this important parameter comprising a wealth of different sensory phenomena. Currently, trained sensory panels are used to determine mouthfeel; however, these are expensive and time-consuming, especially when dealing with large sample-sizes (Prakash, 2016). For certain foods (i.e. semi-solid to liquid), the flow-characteristics (rheology) have been successfully correlated with certain mouthfeel attributes (e.g. stickiness, thickness and mouthcoating (He, Hort, & Wolf, 2016)) and while rheological measurements in some cases can distinguish between samples with different mouthfeels, viscosity alone often fails to accurately explain the complex phenomenon of oral physical interactions that constitutes mouthfeel (Prakash, Tan, & Chen, 2013; Selway & Stokes, 2014). This shortcoming can be explained by the fact that rheology is a property principally related to the substrate (i.e. the food) while mouthfeel arises from physical and chemical interactions between the food and oral cavity that cannot be described solely by the flow-characteristics of the food in question (Selway & Stokes, 2014). This is not to say that bulk properties such as viscosity and density are not important parameters influencing mouthfeel. Mouthfeel is inherently difficult to define due to its' multifaceted nature and requires a highly trained panel in order to accurately identify minute differences between similar samples. As such, development of a high-throughput, inexpensive and reproducible method would offer advantages to both industry and academic researchers. In the last decades considerable effort has been put into development of such a system by food scientists. A promising method is the use of tribology

which can be succinctly defined as follows: “The science of tribology principally involves studying the characteristics of the film situated between contacting bodies and the consequence of its failure or absence” (Stokes, 2012). The word tribology is a contraction of the Greek root words for “rubbing” (tribo) and “study of” (logia). “Soft” tribology can further be defined as the study of lubrication and friction using compliant (i.e. deformable) surfaces to better mimic the conditions in the oral cavity (Joyner, Pernell, & Daubert, 2014a; R. E. Rudge, Scholten, & Dijksman, 2019).

The term tribology was coined in 1966 (Jost, 1966) but the study of friction reaches far back in history. One can imagine how the pyramid-builders would have invested considerable effort into reducing friction when moving large blocks of stone. Some of Leonardo Da Vinci’s drawings show experimental setups for measuring friction between two surfaces but it was not until the age of the machines that tribology really took off (Dowson, 1998). Classic tribology is a branch of mechanical engineering and is concerned with the reduction of friction and thereby wear and tear of machine components; early proponents argued that significant economic gains could be achieved by systematic study of lubricants to prevent or better postpone break-down and replacement of machine parts (Jost, 1966). Classic tribology generally involves hard, non-deformable surfaces and lubricants displaying Newtonian behaviour (R. E. Rudge et al., 2019). Development of more sensitive measuring systems and advances in polymer-science to produce surfaces that mimic biological systems (i.e. deformable surfaces with defined wetting characteristics) has led to the emergence of bio-tribology or “soft” tribology, a branch of tribology that studies the frictional properties of biological systems. Examples of applications include prosthetics (Samaroo et al., 2017; Stevenson et al., 2019; Voutat, Nohava, Wandel, & Zysset, 2019) , contact lenses (Pitenis et al., 2017), cosmetics (Timm, Myant, Spikes, & Grunze, 2011), dentistry (Cai, Li, & Chen, 2017), medicine (Batchelor, Venables, Marriott, & Mills, 2015) and more, as well as the study of friction during oral processing (Sarkar, Andablo-Reyes, Bryant, Dowson, & Neville, 2019).

The last decade has seen an increased use of tribo-attachments to rheometers rather than tribometers such as the Mini Traction Machine (MTM, PCS instruments, UK), commonly used for tribological measurements (Shewan, Pradal, & Stokes, 2019). Rheometers are generally ubiquitous in academic food science labs and often present in large food companies (although they may be out of the price-range for small to medium sized companies) and offer precise normal force control as well as an increased speed range compared to many conventional tribometers; however, as noted recently by (Shewan et al., 2019), several disadvantages exist, namely: a lack of fundamental studies (as compared to the wealth of fundamental studies on tribometers), limitations in the movement profile (i.e. only rotational), limited knowledge on challenges related to interpretation and understanding of the output, and lack of reporting or consideration of surface wear (Sarkar & Krop, 2019; Shewan et al., 2019).

This review aims to introduce tribology to food scientists, assuming no prior knowledge of the area but a basic understanding of rheology and food physics/chemistry. The focus will be on comparison (as far as possible) of methodologies across categories of food and tribological attachments, with an emphasis on preparation protocols and measuring system parameter settings. Most tribology studies so far has focused on dairy-related products or hydrocolloid solutions (Sarkar & Krop, 2019; Shewan et al., 2019) however, measurements on beverages such as wine, tea and soft drinks are possible (see e.g. Chong et al., 2019; Laguna & Sarkar, 2017; Steinbach, Guthrie, Smith, Lindgren, & Debon, 2014) and as such, the field of tribology could well be extended to include other beverages (e.g. beer and other malt-based beverages). Fermented wort with its low viscosity; low concentrations of polysaccharides, proteins, polyphenols, and their complexes; presence of fermentation by-products; and hop-extracts presents a new challenge for tribologists, with many avenues worthy of exploration. For example, hops (*Humulus lupulus*) polyphenols and bitter acids play an important role in the perceived fullness, bitterness, astringency, and stickiness of beers (Goiris et al., 2014; Oladokun et al., 2016); these are sensory phenomena that have already been correlated with tribological measurements in other food systems

(Sarkar & Krop, 2019) and so the relationship between these hop compounds and mouthfeel of beer could potentially be further elucidated using tribology. Another potential area of investigation is the effect of adjuncts on mouthfeel of beer; for example, recently the effect of arabinoxylans from un-malted rye on mouthfeel was investigated and was found to positively influence the perceived fullness of beers (Langenaeken, De Schutter, & Courtin, 2020). Additionally, ways to instrumentally measure the mouthfeel of beers could help in the improvement of beers that are generally perceived as having poor mouthfeel, e.g. non-alcoholic beers (Bellut & Arendt, 2019; Krebs, Müller, Becker, & Gastl, 2019)

The following section (section 2) introduces the fundamentals of tribology, the concept of mouthfeel, and frameworks deemed necessary to undertake tribological research. Section 3 will summarise current knowledge based on research using tribo-attachments on rheometers conducted during the last decade in order to identify knowledge gaps and provide an overview of methodologies and methods of analysis used across different rheometers and lubricants/food. A short overview of the current state of establishing a link between sensory data and tribology is then given (section 4). The review ends with an overview of knowledge gaps identified and a list of general recommendations and guidelines specific to the purpose of the research, meant as a source of inspiration for development of product-specific methods.

For reviews and articles dealing with the difference between rheology and tribology (J. Chen & Stokes, 2012), in depth introductions to the theoretical background of tribology (Sarkar, Andablo-Reyes, et al., 2019; Stokes, 2012), theoretical work on lubrication of soft viscoelastic surfaces (Pandey, Karpitschka, Venner, & Snoeijer, 2016) as well as linking tribology and sensory data (Sarkar & Krop, 2019; Shewan et al., 2019), and more complex modelling in tribology (L. Chen & Opara, 2013; Smith, Guthrie, Steinbach, Lindgren, & Debon, 2015; Vakis et al., 2018) the references cited here are recommended.

2 Fundamentals of soft tribology

2.1 Tribology is a system property

An important theoretical framework to be considered before embarking on tribological work is that tribology is a system property (I. Hutchings, Gee, & Santner, 2006). This means that careful consideration, especially when interpreting and comparing tribological data, should be given to the nature of

a) The measuring system – (e.g. type of machine, tribopair configuration and type of movement)
b) The surfaces – (e.g. roughness, hydrophobicity, viscoelasticity)
c) The lubricant (food) – (e.g. rheological properties, heterogeneity (emulsion, particle size, presence of gas, surface-active ingredients)) (Sarkar & Krop, 2019; Shewan et al., 2019)

Figure 1 illustrates the wide array of parameters that influence mouthfeel and play a role doing tribological measurements. An important implication of this is that, when performing a tribological measurement, the output (data) is not only a reflection (product) of the food-systems lubricating properties (as affected by structural and compositional characteristics), but also a measurement of the mechanical and surface properties of the surfaces used (as affected by composition, production method, treatment before use, humidity, temperature and other environmental factors) as well as a result of the choice of measuring system, protocol and data-gathering strategy (Joyner et al., 2014a; Sarkar, Andablo-Reyes, et al., 2019; Sarkar & Krop, 2019; Shewan et al., 2019).

This paradigm can be difficult to grasp and may evoke a poignant feeling when first encountered. Especially daunting is the task of familiarising oneself with a plethora of research fields ranging from mechanical engineering and physics, materials science, mathematics and statistics to the fields of food science: food chemistry, food physics and finally sensory science that itself is built on a knowledge base from physiology, psychology, sociology and behavioural science.

In the next sections, the concept of mouthfeel is introduced, focusing on the physical and chemical dimensions, as well the characteristics of the oral cavity (with the aim of justifying choice of surfaces for mimicking these) and saliva. Following this, the basic mathematical principles of tribology and common approaches to interpretation of the data are presented, and finally a brief overview of the rheometers and tribo-attachments as well as other tribology devices used in literature is given.

[Figure 1 here]

2.2 Quantifying mouthfeel

Guinard and Mazzucchelli (1996) state that "mouthfeel includes all of the tactile (feel) properties perceived from the time at which solid, semi-solid or liquid foods or beverages are placed in the mouth until they are swallowed" and further define residual effects of mouthfeel as after-feel, much in the same way as after-taste refers to residual taste sensations. Before entering the mouth, food is defined by its history (i.e. composition and structure as affected by production and processing method and ingredients used). Upon entering the mouth, it is generally accepted that the mouthfeel of semi-solid and fluid foods like beverages is initially dominated by rheological properties where sensory sensations such as thickness and creaminess are perceived and, as the food is swallowed and surface interactions become more important, tribological properties begin to dominate (J. Chen & Stokes, 2012; Stokes, Boehm, & Baier, 2013). For solid foods the initial stage (first bite) is dominated by characteristics such as mechanical strength and fracture properties until the bolus is formed whereupon tribology becomes important (Witt & Stokes, 2015). The work of Kokini, Kadane, & Cussler (1977), dealing with quantitively describing texture perception of foods, is often cited as the starting point of relating friction parameters to oral processing (Sarkar & Krop, 2019). The authors of this paper recognised that viscosity was not the only parameter necessary in order to predict sensory perceptions such as smoothness and slipperiness. Hutchings & Lillford (1988) proposed a theoretical framework for analysing the texture of food succinctly described

along three axes: Time (e.g. changes in temperature and number of chews), degree of structure (bulk and particulate properties) and degree of lubrication (e.g. influence of saliva and sample moisture and fat content). The Hutchings and Lillford Breakdown Path provided a qualitative conceptual approach to the eating experience/perceived texture/mouthfeel using intuitive physical properties of food and additionally gave the important insight that texture exists in the brain and is therefore a psychophysical phenomenon that needs an integrative research approach combining psychology, rheology and physiology in order to be properly explained (Boehm, Yakubov, Stokes, & Baier, 2019; J. B. Hutchings & Lillford, 1988; Sarkar, Andablo-Reyes, et al., 2019). This also illustrates the importance of realising the difference between sensory properties (as perceived by the brain) and material properties (as measured by instruments) and the complexity involved in trying to directly correlate these two properties, not to mention the complexity of looking for causality in these empirical relationships (J. Chen, 2020). Trying to quantify mouthfeel is further complicated by the continuous transformation food undergoes after entering the mouth (i.e. structural breakdown and incorporation of saliva causing changes in lubricating properties), meaning that determination of exactly which property (e.g. chemical, rheological, mechanical or structural) of the food-bolus at any given time correlates with a given textural sensation is an open question (Stokes et al., 2013). Recently, Boehm *et al.* (2019) proposed to adapt the HL BP into a quantitative model based on an analytical research approach, stressing the importance of conducting fundamental studies into foods interaction with saliva and the underlying mechanisms of lubrication of food, as well as combining several approaches (e.g. rheology, tribology) in order to provide quantifiable attributes of the breakdown of food during oral processing.

2.3 Surfaces – approximation to the physiology of the mouth

As previously mentioned, the choice of surface material for tribological measurements will affect the output. Two considerations are important in this aspect: getting as close to the properties of the mouth as possible and reproducibility of those conditions (Sarkar, Andablo-Reyes, et al., 2019). The need for

easily accessible and cheap surface materials means that a trade-off between these two considerations will often be necessary.

In terms of surface properties, roughness (R_a) characterised by the topography of the surface (i.e. asperities' height or well depth, width and between-distance [µm]) (Krzeminski, Wohlhüter, Heyer, Utz, & Hinrichs, 2012; van Stee, de Hoog, & van de Velde, 2017), hydrophobicity (wettability) measured as the contact angle (θ) between surface and specimen (Bongaerts, Fourtouni, & Stokes, 2007; Bongaerts, Rossetti, & Stokes, 2007), and Elastic (Young's) modulus (E) i.e. "stiffness" [Pa] are important parameters that influence friction (Selway & Stokes, 2014).

The tongue (figure 2) is covered by four types of papillae with differing spatial distributions: filiform, fungiform, foliate and circumvallate and it is believed that the filiform papillae are responsible for mouthfeel perception as they the most numerous and lack taste receptors (Hanh & Frank, 2014). This renders the human tongues topography highly variable (Laguna, Bartolomé, & Moreno-Arribas, 2017). Roughness values are generally reported as ranging between 42-95 µm (distance between asperities) with a well depth between 200-300 µm (Godoi, Bhandari, & Prakash, 2017; Pradal & Stokes, 2016; X. Wang, Wang, Upadhyay, & Chen, 2019). The oral cavity is generally hydrophobic with contact angle ranging between 72-83° depending on time of day measured (Mei, White, & Busscher, 2004), but will become increasingly hydrophilic (θ = 51°) upon addition of saliva (Sarkar, Andablo-Reyes, et al., 2019). Despite this relatively rough surface (comparable to 100 grit sandpaper) the tongue does not feel rough, mainly due to its reduced Elastic modulus of approximately 2.67 kPa (2.53 kPa for the soft palate) (Cheng, Gandevia, Green, Sinkus, & Bilston, 2011). The movement of the tongue is in the range of 30 mm/s at the beginning of food intake and 5 mm/s just before swallowing, with contact pressure between 15-60 kPa between tongue and palate translating to a normal force of 0.5 N (van Stee et al., 2017); however, the tongue is capable of producing normal force ranging between 0.1-90 N (Pradal & Stokes, 2016).

[Figure 2 here]

Several studies have investigated the use of biological tongues (pig's tongue)(Carpenter et al., 2019; Dresselhuis, de Hoog, Cohen Stuart, & van Aken, 2008; Ranc et al., 2006), however, it is noted that variability, accessibility and issues with decomposition makes research using pig's tongue challenging. The most commonly used material for either one or both surfaces is polydimethylsiloxane (PDMS) due to its many favourable characteristics such as easily alterable hydrophobicity, roughness and surface topology (Stokes et al., 2013). PDMS is highly compliant (E = 0.57-3.7 MPa) depending on cross linkage (Z. Wang, Volinsky, & Gallant, 2014) and can relatively easily be made hydrophilic by plasma-treatment, however hydrophilicity is generally short-lasting depending on treatment (Tan, Nguyen, Chua, & Kang, 2010). The Young's modulus of PDMS is highly dependent on ratio of elastomer base to curing agent, an aspect to be considered if production of PDMS is done in-house (Z. Wang et al., 2014). In addition, the surface of PDMS can easily be altered by casting in moulds with desired surface topography (Fitzgerald et al., 2019) and its transparent nature allows microscopical observation of lubricating behaviour in real-time (Carpenter et al., 2019). Other commonly used materials for the lower (soft) surface(s) include surgical tape (typically 3M Transpore Surgical Tape 1527-2), whey protein isolate (WPI), Polytetrafluoroethylene (PTFE), polyurethane and rubber (natural, foamed and styrene butadiene). For upper (hard) surfaces glass or steel is commonly used, but polypropylene or PDMS are also sometimes used. Carpenter *et al.* (2019) found that PDMS mimics the tongue better compared to agarose gels, however, Di Cicco *et al.* (2019) found that whey protein isolate was a better replacement for the human tongue and yielded more reproducible results compared to PDMS when applied to yoghurts.

2.3.1 Saliva

Saliva plays a key role during oral processing of food: it is a hydrating, lubricating, antibacterial and buffering agent, providing a medium for diffusion and/or mechanical transfer of taste-molecules to

receptors, precipitation of proteins resulting in the sensation of astringency, as well as contributing significantly to enzymatic degradation and finally bolus formation and thereby safe swallowing of food (Boehm et al., 2019; Laguna & Sarkar, 2017). The composition of saliva varies significantly depending on which salivary gland it is excreted from as well as circadian rhythm, collection method, age, gender, diet, blood type and medicines (De Almeida, Grégio, Machado, De Lima, & Azevedo, 2008; Schipper, Silletti, & Vingerhoeds, 2007). In addition, it is often difficult to determine whether constituents of saliva are of human or bacterial origin and the composition of saliva will change over time as a result of contamination (Schipper et al., 2007). Generally, saliva is composed of 99% water with the remaining 1% being composed of minerals (sodium, potassium, calcium, magnesium, bicarbonate, and phosphates), nitrogenous compounds (urea and ammonia), enzymes (e.g. α-amylases and lipases) and immunoglobins, proteins and mucins, a glycoprotein thought to be largely (but not solely) responsible for the lubricating and flow behaviour of saliva (Humphrey & Williamson, 2001; Sarkar, Xu, & Lee, 2019). Although human saliva is readily available, the use of biological samples will introduce some degree of variability, complicating interpretation and comparison of results across studies (Boehm et al., 2019). Recently, a critical review examined the use of human saliva and model saliva (i.e. artificial) and concluded that 1) although there have been advances, model saliva systems still exhibit significant differences in terms of lubricating properties, 2) out of the commercially available mucin sources, bovine submaxillary mucin is superior to pig gastric mucin and 3) more systematic research investigating model saliva systems containing mucins and polycationic additives is needed before a standardised model saliva formulation can be agreed upon (Sarkar, Xu, et al., 2019). However, recipes for synthetic saliva do exist for other purposes (e.g. *in vitro* digestion studies) (Minekus et al., 2014). Table 1 presents an overview of recipes for artificial literature and their differences. Although some recipes are quite different, often the ionic composition is the same.

[Table 1 here]

2.4 Stribeck curves

A Stribeck curve is the two-dimensional representation of friction coefficient as a function of (relative) sliding entrainment speed of the tribopairs (the two surfaces). The friction coefficient (μ) is a dimensionless number defined as the ratio between the kinetic (sliding) force (F_k) exerted orthogonally to the normal (load) force (F_N) (figure 3) (Blau, 2001). Assuming a constant F_N and that the kinetic force is equal to the friction force (F_f), this linear relationship gives a quantitative measure of friction:

$$\mu = \frac{F_k}{F_N}$$

The entrainment speed (U) is commonly presented as a dimensionless number, either the Sommerfield number (ηUR/W) or, in the case of deformable surfaces, the elasto-hydrodynamic number ($\eta U E^{1/3} R^{5/3}/W^{4/3}$). Load or normal force (W), radius (R) and Young's modulus (E) is often considered constant so that the entrainment speed (U) is either presented alone or scaled by the viscosity of the fluid (η) in the case when viscosity changes as a function of speed (i.e. shear rate) (Shewan et al., 2019; Stokes, 2012).

[Figure 3 here]

The classic Stribeck curve (shown in figure 4a) is often divided into three regimes depending on the film thickness between the surfaces: Boundary, mixed and hydrodynamic. In the case of deformable surfaces where the visco-elasticity of the surface influences measurements, the hydrodynamic regime is referred to as the elasto-hydrodynamic regime (Sarkar & Krop, 2019; Shewan et al., 2019; Stokes, 2012). Depending on the capabilities of the measuring system (i.e. range of speeds), a fourth regime can be included: The static regime as shown in figure 4b, which occurs at very low speeds (typically below 10^{-6}-10^{-5} m/s) in which movement is imperceptible (Pondicherry, Rummel, & Laeuger, 2018). This regime shows an increase in friction from 0 until a yield point signifying transition into the kinetic regime. In principle, there

254 is no macroscopic movement in this regime and the speed depicted is due to deformation of the surfaces
255 and the lubricant (Kieserling, Schalow, & Drusch, 2018). The boundary regime is dominated by surface
256 properties as there is physical contact between the two surfaces' asperities and is therefore characterised
257 by high friction coefficients, as observed by a peak or plateau. It should be noted that there is fluid
258 between the surfaces in the boundary regime, however the effect of it is negligible compared to the
259 impact of the two surfaces. In the mixed regime the fluid begins to be entrained between the two surfaces
260 and thus an increase in distance and thereby contact between surface asperities is observed, resulting in
261 decreasing friction due to thin film lubrication. In the mixed regime, effects of size of particles can be
262 observed as the distance (D) approaches the dimensions of a given particle (Yakubov, Branfield,
263 Bongaerts, & Stokes, 2015). In some instances "stick-slip" events are also observed in this regime, resulting
264 in erratic behaviour and variation of the curve, the friction coefficient jumping up and down (Sanahuja et
265 al., 2017). In the hydrodynamic regime the high speeds entrain the lubricant and generates enough lift
266 force and hydrodynamic pressure to support the applied load and increase the distance between surfaces
267 and is thus largely dominated by fluid dynamics. In the hydrodynamic regime the internal resistance
268 (viscous drag) of the fluid begins to play a role leading to an increase in friction (Selway, Chan, & Stokes,
269 2017). It is generally assumed that the mixed and boundary regimes are highly relevant to food oral
270 processing due to the rough and deformable nature of the tongue (Malone, Appelqvist, & Norton, 2003;
271 Selway & Stokes, 2014).

272 [Figure 4 here]

273 2.5 Analysing soft tribological data – deviating from the classic Stribeck curve

274 The classic Stribeck curve was proposed in the early 1900s by Stribeck and colleagues and was generated
275 using relatively simple Newtonian lubricant and hard, non-deformable surfaces using speeds relevant to
276 balls in ball-bearings; however, the complex and variable microstructures (e.g. emulsion-systems) of food

often displaying non-Newtonian behaviour means that Stribeck curves obtained in soft-tribology using compliant surfaces will often deviate from the classic Stribeck curves (Jacobson, 2003; R. E. Rudge et al., 2019). One approach when investigating surface properties is the Master Curve Approach, where entrainment speed for several Stribeck curves for a range of Newtonian fluids with different viscosities is scaled by their respective viscosities and then collapsing these onto a single curve in a log-log coordinate system (figure 4c), thereby generating a classic Stribeck curve specific to the measuring system, lubricant and tribopairs (Bongaerts, Fourtouni, et al., 2007; Shewan et al., 2019). This Master Curve can then be approximated by fitting a set of equations involving Power law coefficients describing each part of the curve. Comparison of a Master Curve generated with hydrophilic and hydrophobic fluids with data obtained from actual complex food systems enables elucidation of the dominant phase in each regime as well as comparison with other tribopairs (Sarkar & Krop, 2019; Shewan et al., 2019).

In a slightly different approach, the entrainment speed can be scaled (multiplied) by the food system's dynamic viscosity at that shear rate (if available), thereby generating a Master Curve for that food system (Joyner et al., 2014a). Care should be taken however, as the assumption that effects of viscosity are effectively "normalised" through this scaling is not necessarily valid, as viscosity and wetting behaviour of a fluid impacts the viscoelastic behaviour such as hysteresis and squeeze-out dynamics of the compliant surfaces and these effects will also alter the shape of the Stribeck curve (Selway et al., 2017).

Other approaches have also been attempted to account for the Stribeck curves obtained for complex food systems that are not easily interpretable using the terminology of classic tribology. Nguyen et al. (2017) proposed a new interpretation scheme based on data obtained for yoghurts (figure 4d). In the first zone it is assumed that initially only the fluid is entrained, and friction decreases as more and more fat globules enter the gap. With increasing speeds, a thin lubricating film is forming and the friction rises again (zone 2) until the surfaces are partly separated and the curve enters zone 3 (corresponding to the mixed regime) and finally the hydrodynamic regime (zone 4) is reached. In case of gel structure breakdown, the friction

may decrease (broken line) and friction in this zone is assumed to not only be governed by viscosity but also by gel strength. A similar shape of Stribeck curve was found by Ng, Nguyen, Bhandari, & Prakash (2017). Pondicherry, Rummel and Laeuger (2018) extended the Stribeck curve to include the static regime (figure 4b), however, as the build-up of friction in this regime is assumed to be largely due to elastic and plastic deformation of the surfaces, it is still unknown whether this regime will offer insights into lubricating behaviour of food systems, but it could possibly be a valuable tool in studying the frictional properties of surfaces at nanoscales.

Different ways of interpreting Stribeck curves generated from different food systems will be further discussed in section 3.3, with an emphasis on how to obtain quantities that can be subjected to statistical analysis.

2.6 Rheometers with tribo-attachments (instruments)

Several rheometers have been used for tribological measurements using different measuring systems (figure 5a-c). Measuring system in this context refers to the attachment holding the surfaces; these include both commercial tribology attachments or modified rheology attachments. The measuring system setup varies, being comprised of single ball on three pins or three plates, two or three balls on plate, and ring or half-ring on plate. Rheometers used in the studies included in this review include: MCR301, MCR302 and MCR502 (Anton Paar, Austria) and Discovery Hybrid Rheometer (DHR-3) (TA Instruments, USA).

[Figure 5 here]

2.6.1 Other tribology devices

Tribology measurements can also be undertaken using dedicated tribometers such as the MTM and the Tribolab (UMT, Bruker, Billerica USA). The MTM uses a ball-on-disk configuration that allows rotational and rolling/sliding movements as the surfaces can move independently of each other. This differs from

rheometers where one surface is static. The Tribolab offers among other things a pin-on-disk setup and more complex multi-directional movement profiles that simulates the motion patterns of the tongue and can be used to study e.g. soft solid foods and boli (Campbell, Foegeding, & van de Velde, 2017; Fuhrmann, Aguayo-Mendoza, Jansen, Stieger, & Scholten, 2020; van Stee et al., 2017).

An alternative approach is to design a device or attachment in-house in order to fulfil requirements specific to the investigation. Many interesting and innovative solutions can be found in literature, ranging from custom-built attachments for rheometers (R. E. D. Rudge, Scholten, & Dijksman, 2020) or texture analysers (Morell, Chen, & Fiszman, 2017) to devices using optical interferometry to study wetting transitions (Martin, Clain, Buguin, & Brochard-Wyart, 2002), devices fitted with cameras or confocal microscopes for imaging-based techniques (Dresselhuis et al., 2007; Wandersman, Candelier, Debrégeas, & Prevost, 2011; Yashima et al., 2015), devices for investigating molecular organisation of soft polymer interfaces in contact (Cohen, Restagno, Poulard, & Léger, 2011) and wholly in-house built tribometers (de Wijk & Prinz, 2005).

3 Tribology using rheometers

3.1 Approaches to tribological studies

Generally, 3 approaches towards increasing understanding of mouthfeel with the aim of generating explanatory and/or predictive models can be distinguished: Conceptual, fundamental, and empirical (applied). The conceptual approach provides a theoretical framework and aims to build models that can then be tested and validated by experiments (Boehm et al., 2019; Gabriele, Spyropoulos, & Norton, 2010; J. B. Hutchings & Lillford, 1988; Kokini et al., 1977). The fundamental approach will often be applied using model fluids (e.g. concentration gradients of compound(s) of interest) and can be divided into two often overlapping categories: Methodology; development of reproducible methodologies by varying test protocols (e.g. cleaning, sample preparation, surfaces etc) (See e.g. Helen S Joyner, Pernell and Daubert,

2014a, 2014b, 2014c; Kieserling, Schalow and Drusch, 2018) and/or Mechanism; investigation of the underlying mechanisms of mouthfeel as described by tribological (and complimentary) data to generate explanatory models of mouthfeel. The latter includes e.g. investigations into the lubricating properties of saliva and its interaction with either synthetic surfaces (Bongaerts, Rossetti, et al., 2007; Carpenter et al., 2019), biological materials (e.g. pigs tongue) (Dresselhuis et al., 2008; Ranc et al., 2006) or the food matrix (Laguna, Bartolomé, et al., 2017; Morell et al., 2017), the characteristics of the tribological surfaces (Dresselhuis et al., 2007; Kim, Wolf, & Baier, 2015), relationship between lubricating behaviour and micro/nano-structures of the food (Garrec & Norton, 2012; Stokes, Macakova, Chojnicka-Paszun, De Kruif, & De Jongh, 2011), influence of fluid viscosity and wetting on viscoelastic lubrication (Selway et al., 2017), as well as studies on the topography and physiological characteristics of the oral cavity (X. Wang et al., 2019) among others. The empirical (applied) approach is aimed at practical applications and strives to generate predictive models that correlate tribological (as well as chemical, rheological and physical parameters) to sensory data depending on differences in production process or composition of the given food.

The next section will summarise the methodologies and interpretation strategies of the original studies included in table 2. All of these studies have used rheometers with tribology attachments (either made in-house or commercial) to conduct research covering a wide range of purposes and foods (e.g. bread, yoghurt, soymilk, soft drinks); from fundamental studies focusing on development of reproducible methods or elucidation of lubrication mechanisms to practical applications. The selection process of the studies was not systematic, but to the best knowledge of the authors, those studies presented provide a sufficient and exhaustive overview of the use of rheometers with tribological attachments.

3.2 Methodologies

Table 2 gives an overview of the studies included for this review. Additional information on cleaning regimes, specific attachments used (lab-made or commercial), interpretation strategy, run-in procedure and surface investigations (if applicable) can be found in supplementary material. A common approach when selecting measurement parameters is to choose conditions that mimic oral conditions the best as this enables elucidation of lubrication mechanisms and interpretation of results in relation to what actually happens in the mouth. There is considerable variation in measurement parameters among studies and the aim of this review is not to provide a golden standard or one-size-fits-all solution, but rather to present different methods to achieve a similar goal.

12 of the 24 studies included worked with dairy products (yoghurt, milk, cream cheese, custard or dairy substitutes), 7 investigated with model systems (e.g. corn syrup, mineral oil or model emulsions, as well as yoghurt), 2 worked with chocolate, and 1 each for gluten-free bread, soft drinks, and saliva. When testing a particular system for e.g. reproducibility, effect of surface characteristics, and/or measuring parameters, a common practice is to use either mineral oil alone (due to its' relatively standardised lubricating properties) or a combination of demineralised water, mineral oil and yoghurt as examples of two opposites (hydrophilic/hydrophobic) and an emulsion system exhibiting both properties.

Of the rheometers used, only two commercial producers were represented: The Modular Compact Rheometer, MCR301, MCR302 and MCR502 (Anton Paar, Austria) and the Discovery Hybrid Rheometer (TA Instruments, USA). Steinbach, Guthrie, Smith, Lindgren, & Debon (2014) compared the use of an MCR301 with ball-on-3 plates and the MTM with single contact ball on plate on de-gassed soft drinks (cola and lemon lime). These authors reported a measured difference in friction coefficients in the boundary regime for both machines, however, the MCR301 showed an increased analytical sensitivity (as calculated by the difference in friction coefficient divided by the pooled standard deviation) by up to a factor of 200,

391 indicating that the MCR301 with ball-on-3 plates could provide better discrimination of aqueous solutions
392 in the lower regimes.

393 [Table 2 here]

394 3.2.1 Tribological attachments

395 The tribological attachment chosen will influence the output and hence comparison between studies
396 using different systems (e.g. ball-on-3 plates and half-ring-on-plate) is generally not feasible. Only one of
397 the included studies has systematically compared two different systems; Joyner et al. (2014a) compared
398 the use of ball-on-3 plates and double-ball-on-plate on the MCR302 (Anton Paar, Austria). These authors
399 found differences in the magnitude of friction coefficients of mineral oil but not in the regimes observed;
400 they attributed this difference to the fact that the plates in the ball-on-plate system are at an angle,
401 meaning that the small amount of oil used would have flowed to the bottom of the plates, thereby
402 reducing the lubricating contact. More research is needed in order to quantify the potential effects of
403 different attachments on the shape, magnitude, reproducibility, comparability, and variability of the
404 Stribeck curves obtained.

405 3.2.2 Surfaces

406 The question of whether to produce surface materials in the lab or buy commercially available surfaces
407 comes down to a question of the aim of the study and practical considerations. While producing surface
408 materials in-house offers control over Elastic modulus and roughness, the disadvantage is potential
409 introduction of variability and the requirement for investigation of surface properties from batch to batch
410 to ensure uniformity, reproducibility and accurate comparison between studies. Taking PDMS as an
411 example, in short, the production of this polymer consists of mixing a silicone elastomer base and a curing
412 agent, followed by degassing in vacuum to remove air bubbles and subsequent curing in an oven. The
413 mixing ratio has profound effects on the Elastic modulus; the Elastic modulus (in MPa) can be expressed

414 as 20 MPa/PDMS base:curing agent ratio (Z. Wang et al., 2014). Kim et al. (2015) investigated the effects
415 of PDMS production protocols (base:curing agent ratio, curing temperature and time, and mould finishing
416 amongst others) on friction measurements and found that the consistency of the Stribeck curves are
417 highly sensitive to these parameters, suggesting the implementation of a standardised material/synthesis
418 protocol to overcome these potential biases. Similar introduction of variability could be imagined for other
419 in-house made polymer solutions.

420 The choice of surfaces used varies considerably between studies, with combinations of steel (either as a
421 ball or ring), polypropylene and glass on PDMS (either lab-made or commercial), polyurethane, surgical
422 tape, natural rubber, foamed rubber, styrene butadiene rubber, PTFE, WPI, and HDPE. Krzeminski et al.
423 (2012) compared the use of PTFE (hard surface) and various rubbers (natural (NR), foamed (FR) and
424 styrene butadiene (SBR)) with varying Elastic moduli (soft surfaces) and surface roughness. The authors
425 reported that harder surfaces resulted in unstable friction curve progressions and observed a negative
426 correlation (Pearson's correlation coefficient from Multiple factor analysis) between surface roughness
427 and friction coefficient at low speeds, concluding that SBR was the most suitable material for
428 discriminating between yoghurt samples measured; however, the authors did not investigate effects of
429 wettability of the surfaces. Joyner et al. (2014a) compared the use of HDPE, WPI and PDMS using a double
430 ball-on-plate setup and reported that WPI is the most suitable due to its' low Elastic modulus and
431 hydrophilic nature, making it comparable to the tongue. These results are corroborated by Di Cicco et al.
432 (2019); these authors reported a higher discriminative power of WPI compared to PDMS using a ball-on-
433 3 plates setup when measuring several commercial yoghurt samples. Kieserling et al. (2018) compared
434 the use of glass or steel balls on PTFE, PDMS and SBR on a ball-on-3 plates/pins system working with
435 demineralised water, sunflower oil, and yoghurt. Through systematic investigation of wear and
436 reproducibility, these authors concluded that PDMS showed the least variation, however, the authors did

not investigate discriminatory power when comparing similar samples (e.g. yoghurts with varying fat or protein content).

The effects of hydrophobicity of PDMS have been studied using the MTM; adherence of hydrophobic lubricants to surfaces with low wettability (i.e. hydrophobic) results in lower friction coefficients in the boundary and mixed regimes (Bongaerts, Fourtouni, et al., 2007; Dresselhuis et al., 2007); however aqueous solutions of guar gum and xanthan gum resulted in higher friction coefficients between steel and a hydrophilic surface compared to steel and a hydrophobic surface (De Vicente, Stokes, & Spikes, 2005), indicating that the relationship between wettability and friction coefficient is not straight-forward and needs further elucidation. Besides comparing different polymers exhibiting differences in wettability (such as PDMS and WPI) another strategy is to alter the hydrophobicity of a surface material, thereby eliminating confounding variables such as Elastic modulus and surface roughness. In this regard, PDMS can be made long-term hydrophilic to varying degrees. (Hemmilä, Cauich-Rodríguez, Kreutzer, & Kallio, 2012; Shahsavan, Quinn, d'Eon, & Zhao, 2015), however, these techniques require specialised knowledge and equipment. Another possible method is the inclusion of saliva during measurements, as saliva has been shown to render surfaces hydrophilic (Macakova, Yakubov, Plunkett, & Stokes, 2011). In a study investigating the lubricating properties of whey protein microgel particles under biological conditions, Sarkar, Kanti, Gulotta, Murray, & Zhang (2017) rendered PDMS surfaces hydrophilic by plasma-treatment and reported an immediate drop in water-contact angle (from 108° to 30°) followed by a rapid recovery of hydrophobicity over 3 days before stabilisation at 63° for up to a week. By addition of a mucin layer, the contact angle of the PDMS surfaces dropped to 47° and thereby mimicked oral mucosa-coated surfaces well.

3.2.3 Running-in

An often overlooked potential cause of variation in Stribeck curves is surface wear during measurements (Pradal & Stokes, 2016). Running-in refers to the initial conditioning and "smoothing" of surfaces before or during measurements until a steady-state is reached, thereby minimising effects of any differences in surface topology arising from production (Blau, 2005). Running-in presents a challenge when investigating food; consideration should be given to how often surfaces should be changed (i.e. whether it is possible to run several samples on a single surface or change with every new sample) and how to condition (i.e. prepare them for tests and reach a steady-state) the surfaces (if at all) before measurements. The first problem is relatively easily solved by comparing surfaces before and after a given number of runs (a run in this case meaning one sweep up or down the chosen speed range) and determining the appropriate number of runs by either statistical analysis or topography determination. The latter does, however, require access to equipment capable of accurately characterising surfaces, such as a scanning electron microscope and atomic force microscope (Kieserling et al., 2018) or a profilometer (Arvidsson, Ringstad, Skedung, Duvefelt, & Rutland, 2017). If new surfaces are used with every new measurement (a measurement in this case can be either one single run or several consecutive runs) running in of the surfaces is necessary. Kieserling et al. (2018) conducted an in-depth investigation of running-in of PDMS, SBR and PTFE surfaces using mineral oil as lubricant. These authors did measurements comprised of 10 consecutive runs and found that a steady state was reached after approximately 5 runs, after which the obtained Stribeck curves stabilised and the wear rate of the surfaces became defined. The first 5 runs were characterised by an undefined wear rate with high variation and a decreasing trend in friction coefficient. Additionally, the effect of multiple compressions and between-run sample exchange were investigated; between each run, the lubricant was exchanged and the tribopairs were cleaned resulting in an increase in coefficient of variation of the Stribeck curves (Kieserling et al., 2018). Carvalho-da-silva, Damme, Taylor, Hort, & Wolf (2013) employed a similar strategy working with chocolate samples; a

measurement consisted of 7-8 runs and only the last 3 were included for further analysis. A different approach was used by Steinbach et al. (2014); when investigating lubricating properties of soft drinks, a 10 minute interval at constant speed (0.47 mm/s) was employed after samples had been loaded, followed by a recording interval (single run). Goh et al. (2010) employed a similar strategy only with a 1 minute running-in period at 10 mm/s when working with corn syrup solutions. When working with chocolate samples, He et al. (2018) used a higher speed (100 mm/s) for 10 seconds. A common strategy when working with dairy products (custard, milk, cream cheese, yoghurt) is to pre-shear the samples for 1-2 mins at 1 rad/s (speed will vary depending on upper tribopair geometry) in order to ensure homogeneous distribution of sample material as well as condition the tribopairs (Godoi et al., 2017; Lee, Park, & Whitesides, 2003; Nguyen, Bhandari, & Prakash, 2016; Nguyen et al., 2017; Ningtyas, Bhandari, Bansal, & Prakash, 2017). The above examples and results carry significant implications in the case of research focused on foods with e.g. gelling properties or foods that might experience structural changes resulting in altered lubricating behaviour when subjected to shearing; if the objective of a given study is to measure lubricating properties before structural changes are induced, then reaching the steady state (defined wear rate of the surfaces) without sample exchange would prove a challenge. If, on the other hand, surfaces are pre-conditioned with a run-in period using a defined lubricant (e.g. mineral oil or a glycerol solution), then subsequent cleaning and compression of the tribopairs may introduce variation and lower reproducibility.

3.2.4 Entrainment speed and normal force

Entrainment speed is generally increased or decreased (ramp-up or ramp-down, respectively) in a logarithmic fashion, so that the faster the speed is, the shorter is the time between measurement recordings. Speed ranges used vary between studies from below 1 order of magnitude to 9 orders of magnitude (table 2) and even though most rheometers are capable of speeds down to the nanoscale, the static regime is often left unexplored. In general, the speed ranges used are chosen based on food oral

processing speeds and preliminary studies to determine the best range in order to obtain the friction regimes of interest. For samples such as chocolate, yoghurt, cream cheese, custard, and corn syrup, a speed range from 0.001-0.1 up to 100-500 mm/s adequately captures the boundary, mixed and elasto-hydrodynamic regimes (Carvalho-da-silva et al., 2013; Godoi et al., 2017; Goh et al., 2010; He et al., 2018; Laiho, Williams, Poelman, Appelqvist, & Logan, 2017; Ng et al., 2017; Nguyen et al., 2017; Ningtyas et al., 2017; Ningtyas, Bhandari, Bansal, & Prakash, 2019; Pang et al., 2019; Sonne, Busch-Stockfisch, Weiss, & Hinrichs, 2014), while for more liquid samples such as milk or soft drinks, even at speeds up to 750 mm/s, the elasto-hydrodynamic regime is not observed (Baier et al., 2009; Li, Joyner, Carter, & Drake, 2018; Li, Joyner, Lee, & Drake, 2018; Nguyen et al., 2016; Steinbach et al., 2014). Although, as previously mentioned, it is generally assumed that the boundary and mixed regimes are the most relevant to measuring mouthfeel, the lack of a minimum in friction coefficient to define the beginning of the elasto-hydrodynamic regimes could cause problems in interpretation. In addition, this potentially signifies that friction at lower speed towards the static regimes could hold significant information regarding low-viscosity fluids.

Only one of the studies included have investigated potential effects of employing wide versus narrow speed ranges: Di Cicco et al. (2019) investigated the effect of a wide (1000-1 mm/s) and narrow (200-2 mm/s) range on a ball-on-3 plates setup using a steel ball and WPI plates on yoghurts with different fat-contents in a ramp-down fashion (i.e. rather than starting from a resting position, the starting speed was high and then brought down to low speeds). These authors found that the narrow speed range could discriminate between non-fat and fat containing samples, but not between fat containing samples. The wide speed range resulted in higher discriminatory power, possibly due to release of fat globules during the higher shearing (Di Cicco et al., 2019). Another interesting method of this study is the use of ramp-down rather than ramp-up, however, this method is not replicated in any of the other studies. As no studies have systematically investigated the influence of speed range, it is hard to make any conclusive

recommendations, except to state that preliminary studies before any measurements should aim to minimise effects from speed range as well as determine the optimum range in order to capture the relevant friction regimes. In a unique investigation, Joyner et al. (2014a) investigated the effect of using continuous or step-wise increases in entrainment speed and found that step-wise increase resulted in the lowest variation of normal force and friction coefficient, possibly due to the system being unable to equilibrate during continuous increase. These authors recommend that the method of speed ramp should be reported to increase comparability between studies.

The effect of normal force variation has been systematically investigated on a range of attachments and surfaces. Krzeminski et al. (2012) observed that with an increase in normal force from 3 to 9 N on deformable surfaces, overall friction is reduced. This trend is likely due to higher deformation of asperities resulting from the higher pressure as also observed by R. E. D. Rudge, Scholten, & Dijksman (2020) and Urueña et al. (2018). Joyner et al. (2014c) investigated the effect of measurement parameters on normal force when using mineral oil as a lubricant and recommends proper selection of surface, rheometer base (dynamic rather than static) and dynamic normal force control (set to 100%) to reduce variation of normal force during measurements. Fluctuations in normal force during measurements can cause variability of the data, especially when using soft, deformable surfaces due to changes in contact area and normal load distribution however, Joyner et al. (2014c) notes that as normal force is part of the equation for calculating friction coefficient, small variations in normal force are mitigated. Joyner et al. (2014a) observed that friction coefficients are generally unaffected by normal force (3 and 5 N tested) when working with mineral oil. A strategy to account for any variation due to fluctuations in normal force could be to remove any data points collected when normal force was above or below a specified range (e.g. ±5%) (Joyner et al., 2014c, 2014a). Nguyen et al. (2016) tested differences in friction of dairy products (milk and cream cheese) depending on normal force (1 and 2 N) and found only small differences in friction coefficient and no differences in the regimes obtained. In a similar study, Ningtyas, Bhandari, Bansal, & Prakash (2017)

554 investigated the effects of normal force (1, 2, 3 and 5 N) on friction coefficients of cream cheese and found
555 that an increase in normal force led to a decrease in friction coefficients. No clear explanations for the
556 behaviour of non-Newtonian materials under different normal forces is currently known, but it could be
557 due to effects on the pressure in the gap distance altering the tribological behaviour of the materials
558 (Myant, Spikes, & Stokes, 2010). Across studies included in this review, a variety of normal forces have
559 been applied, generally between 1-5 N. Preliminary studies should aim to pinpoint the normal force at
560 which variation is the smallest and the highest discriminatory power is achieved. In addition, fundamental
561 studies to investigate the effects of normal force on Newtonian and non-Newtonian materials should be
562 undertaken.

563 ### 3.2.5 Temperature

564 A wide range of temperatures is used in the included studies, ranging from 4-40 °C. A general trend seems
565 to be to use higher temperatures (e.g. 35-40 °C) when investigating mechanisms of lubrication and room-
566 temperature when defining methodologies. It is generally accepted that viscosity, density, emulsion
567 stability, and solubility show temperature-dependent behaviour, and as such, temperature is expected to
568 affect tribological measurements to various degrees. Although the rationale for using a specific
569 temperature is generally justified (e.g. mimicking in-mouth conditions), the variation in temperatures
570 used makes comparison between studies infeasible.

571 ### 3.2.6 Cleaning of the tribopairs

572 The cleaning regime used when preparing the tribopairs and tribopair holders before and between
573 measurements will inevitably have an impact on the output, especially if even minute residues of cleaning
574 agents (e.g. surfactants) or previous samples are left on the surfaces. As such, it is crucial that a thorough
575 and consistent cleaning regime is employed. In some cases, the cleaning regime is not specified, or it is
576 unclear which cleaning agents were used (see supplementary material). Several strategies are employed

and the choice of which cleaning agent (if any) to use will also depend on the specific food to be tested or the nature of the tribopairs, as well as the choice of whether or not to reuse the surface a number of times. Taking PDMS, one of the most commonly used surfaces, as an example, solvent compatibility (solvent here referring to any compounds being soluble in PDMS or able to solubilise PDMS present in either the sample or cleaning agent) has three aspects to it: (1) solubility of a given solvent in PDMS causing swelling and ensuing induction of changes to the surfaces' properties, (2) loss of solutes to PDMS causing changes in composition of the measured sample, and (3) dissolution of PDMS oligomers (potential contaminants present in the cross-linked PDMS) into the measured sample, also causing compositional changes (Lee et al., 2003). For an overview of the compatibility and swelling of PDMS with commonly used solvents, see Lee, Park and Whitesides (2003). Going from the "lightest" to most rigorous cleaning regimes, the studies included here have employed: rinsing with deionised water and wiping with lab-wipes when working with dairy products (Nguyen et al., 2016, 2017); rinsing with isopropanol when working with mineral oil/emulsions and dairy (Joyner et al., 2014c, 2014b, 2014a; Krzeminski et al., 2012; Laiho et al., 2017; Sonne et al., 2014); rinse with ethanol when working with dairy (Di Cicco et al., 2019; Li, Joyner, Lee, et al., 2018); rinsing with detergent, followed by either a rinsing with deionised water alone (Baier et al., 2009) or using ethanol wipes (Li, Joyner, Carter, et al., 2018) when working with milk; rinsing in an acetone ultrasonic bath when working with corn syrup solutions (Goh et al., 2010); or rinsing with deionised water, followed by washing with detergent, rinsing with deionised water, followed by isopropanol, wiping with lab-wipes and drying with compressed air when working with yoghurt (Kieserling et al., 2018). The wide variety of surfaces and measurement protocols makes comparison between cleaning regimes difficult, and ultimately the choice of cleaning agents and method will be at the researchers' discretion.

3.3 Data processing

Processing of the Stribeck curves obtained from tribological measurements can generally be done in two ways: semi-quantitatively by visually comparing curves for different samples in conjunction with theoretical knowledge and hypotheses, or by extraction of quantitative data for further analysis (which again can be broadly divided into two approaches). While the first is a valuable and often used tool for elucidating mechanisms of lubrication (and taking into account that visual exploration of data should always be the first step in any statistical analysis if possible), visual assessment will quickly become infeasible in the context of large sample sized and multivariate data analysis. This is not to say that visual exploration of Stribeck curves is not a valid approach, but rather that generation of statistical models requires numeric data. In addition, the first approach requires in-depth knowledge of tribology and the food-matrix, while for most practical applications food scientists will be more interested in finding correlations between variables (e.g. sensory data and physical/chemical parameters). Attempts to infer statistically significant differences between samples have resulted in a few different strategies. A common pre-processing step when each data point of each run consists of several data collections is to exclude outliers above or below a certain threshold. As per good common practice, Stribeck curves are presented as mean ± standard deviation of triplicate (or more) measurements for each data point and any parts of the curves of different samples not overlapping are assumed to be significantly different (Carvalho-da-silva et al., 2013; Goh et al., 2010; He et al., 2018; Joyner et al., 2014c, 2014a, 2014b; Li, Joyner, Carter, et al., 2018; Li, Joyner, Lee, et al., 2018; Ningtyas et al., 2019; Pang et al., 2019). Stribeck curves can then either be visually assessed and discussed considering complementing data or quantitatively analysed to obtain variables for further (multivariate) data analysis. Further extraction of numerical information generally follows two approaches; (1) comparison of friction coefficients at given set speeds (e.g. 1, 10, 100... mm/s) (Baier et al., 2009; Krzeminski et al., 2012; Laiho et al., 2017; Sonne et al., 2014; Steinbach et al., 2014) or (2) determination of μ and U at transition points between regimes and slopes within

623 regimes (note that axes are generally semi-log or log-log) (Di Cicco et al., 2019; Godoi et al., 2017;
624 Kieserling et al., 2018; Ng et al., 2017; Nguyen et al., 2016, 2017; Ningtyas et al., 2017) . The first approach
625 seems most applicable when Stribeck curves between samples follow the same trend (i.e. transition points
626 occur around the same speeds) or when magnitude of friction within a given regime is the object of
627 investigation. The second approach yields information about when transitions occur depending on e.g.
628 composition and how fast friction increases or decreases in a given regime. Taking the analysis a step
629 further, Di Cicco et al. (2019) first extracted 8 variables from the Stribeck curves (average friction in each
630 regime, slope in the mixed regime, and μ and U at transition points between regimes) of 9 commercial
631 yoghurts with varying fat-content and applied analysis of variance (ANOVA) followed by Tukey's pairwise
632 comparison to determine which of these 8 variables best discriminated between samples. These authors
633 then applied 2 times Principal Component Analysis (PCA) to the dataset, both the 8 variables extracted as
634 well as the full set of measurements (9 samples x 3 runs/sample x 61 data point/run). PCA on the 8
635 variables in a biplot proved a valuable tool to extract information about which variables explained
636 variation of a given sample, as well as reveal clusters of samples and correlations between variables.
637 Similarly, PCA on the full dataset provided good separation of groups and proved a valuable tool in
638 identifying which regimes (speed intervals) explained the largest part of the variance of the dataset.

639 A strategy that has so far seemingly been left unexplored is the application of calculus (e.g. area under
640 the curve) or fitting of e.g. polynomials to bell shaped parts of the Stribeck curve.

641 4 Linking tribology and sensory

642 Recent reviews have examined the application of tribology as a means of explaining mouthfeel sensations
643 and providing a link between sensory data and instrumental measurements (Sarkar & Krop, 2019; Shewan
644 et al., 2019). Looking at the relationship between friction coefficient and sensory data across instruments
645 and foods, Sarkar & Krop (2019) identified three clusters based on food, sensory characteristic and friction

646 regime: Cluster 1 contained full fat milk and yoghurt, o/w emulsions, chocolate, and cream cheese and
647 correlations with viscosity, astringency and smoothness; cluster 2 contained low fat cream cheese, low
648 fat yoghurt, and no fat milk and correlations with creaminess, graininess, and smoothness; cluster 3
649 contained emulsion-filled gels, bread, and hydrogels and correlations with roughness, fattiness, stickiness,
650 firmness, chewiness, dryness, pastiness, slipperiness and salivating effect, with some overlap between
651 cluster 1 and 3. Although these relationships are system-specific and have often been obtained using
652 different sensory analysis techniques, interpretation strategies and data analyses (e.g. Pearson's
653 correlations, PCA and Partial least squares regression (PLS)), the evidence points towards tribology as a
654 valuable tool in determining certain mouthfeel characteristics of foods (Sarkar & Krop, 2019).

655 Several studies have explored the link between sensory data and tribology. The link between the
656 mouthfeel of wine (especially the attribute astringency) and instrumental measurements has been
657 explored recently: the use of tribology has helped in elucidating some of the mechanisms responsible for
658 this sensation, specifically the interaction between saliva and polyphenols found in wine and the
659 correlation with friction (Laguna & Sarkar, 2017). Using a modified Texture Analyzer with stainless steel
660 on PDMS, Stribeck curves of mixtures of whole human saliva and tannin-solutions or red wines were
661 measured and a positive correlation was found between the friction coefficient at 0.075 mm/s and both
662 perceived intensity of astringency and level of tannins in the samples (Brossard, Cai, Osorio, Bordeu, &
663 Chen, 2016). In contrast, in a study using model wine systems consisting of ethanol, glycerol and oak
664 tannins mixed with artificial saliva measured on an MTM using PDMS on PDMS, no correlation was found
665 between presence of tannins and perceived astringency (Laguna, Sarkar, et al., 2017). A possible
666 explanation for this could be the difference in measuring systems and experimental protocol (Laguna,
667 Sarkar, et al., 2017), highlighting the importance of instrumental choice and setup in tribology. More
668 recently, in a study using the MTM and PDMS surfaces, S. Wang, Olarte Mantilla, Smith, Stokes, & Smyth
669 (2020) investigated the effect of tannins and pH in wine with human saliva on level of astringency; no

overall correlation could be found between astringency and friction, however, by dividing astringency into sub-qualities “rough”, “drying” and “pucker”, it was found that “drying” is driven by levels of tannins and is related to the boundary regime while “pucker” is explained by pH and rate of increase of friction. The authors conclude that explaining astringency based on interactions between saliva and astringent compounds may not be adequate and that astringency itself is multi-modal. He et al. (2018) measured Stribeck curves of expectorated chocolate boluses and found that differences in mouthcoating was reflected in the mixed regime while thickness could be correlated to the hydrodynamic regime. This is perhaps not surprising, as thickness has previously been shown to be correlated with viscosity and bulk properties (He et al., 2016; Wagoner, Çakır-Fuller, Shingleton, Drake, & Foegeding, 2019), which are the main contributors to friction in the hydrodynamic regime. These results are corroborated by Carvalho-da-silva et al. (2013), who investigated the melting and friction properties of two iso-viscous chocolate samples and found among other things, that mouthcoating and friction coefficients were negatively correlated at higher speeds. For yoghurts of various composition (e.g. differences in fat, protein, hydrocolloids and production method) it has been shown that friction coefficients at specific speeds can be successfully correlated to perceived creaminess and viscosity (Laiho et al., 2017; Sonne et al., 2014) as well as stickiness, oiliness and thickness (Ng et al., 2017; Nguyen et al., 2017). Similar results correlating creaminess/thickness to rheology/tribology data have also been found for cream cheese (Ningtyas et al., 2019). These results come together to show that correlations do exist and can be achieved by careful consideration of measuring system and protocols.

5 Conclusions

There has been a recent surge in studies successfully relating tribological measurements to mouthfeel of food and beverages. The need for (1) fundamental studies to determine underlying mechanisms and (2) development of standardised methods and measurement protocols to increase comparability across studies (and potentially improve correlations between sensory and tribological data) is becoming increasingly necessary. Compared to the solid knowledge base and amount of publications using the MTM, information on fundamental properties of tribological attachments on rheometers is sparse (Shewan et al., 2019). Although some of the knowledge obtained on the MTM is highly relevant and perhaps transferrable to rheometers, further investigations are needed in order to verify this assumption. Based on the above, several directions for further potential investigations have been identified:

- Effect of hydrophobicity (by incorporation of saliva, modification of surfaces, comparison of surfaces from different polymers with different wettability)
- Running-in procedures as a means to reduce variability of measurements
- Differences between tribology attachments as well as comparisons of tribometers and rheometers to determine differences in Stribeck curves and analytical sensitivity of different systems
- Influence of temperature on Stribeck curves
- Potential effects of different cleaning regimes and the chemicals used
- Potential valuable information extracted by ramp-up and ramp-down of speed, and the influence of speed range on measurements

General considerations when choosing a suitable methodology should be based on the aim of the study. More precisely, whether the measurement parameters and conditions are meant to mimic the in-mouth conditions during oral processing as closely as possible (e.g. by using surfaces, speed ranges, normal force,

712 and temperature etc with similar characteristics to the mouth), or whether the focus should be on
713 capturing as much data as possible (e.g. wide speed range) with as a high a discriminating power and
714 reproducibility as possible (e.g. for correlations with sensory and compositional data etc). This trade-off
715 will influence the possible interpretations of the Stribeck curve, and the data obtained will reflect these
716 considerations. Naturally, the data analysis and information extraction should be tailored to the specific
717 aim, whether it be explanatory or predictive power. Figure 6 gives a graphical representation of
718 parameters to consider at each step of planning a tribological study.

719 For better comparability between studies, it is recommended to:

720 - Conduct preliminary studies to determine best speed range, running-in procedure, cleaning
721 regime
722 - Report in detail on production method of surface polymers, cleaning regime, temperature,
723 running-in procedure, and method of speed ramp
724 - Use surfaces with standardised characteristics and in the case of in-house made surfaces report
725 surface roughness, wettability and Elastic modulus
726 - Gather as much data as possible on the samples to provide high statistical power, and potentially
727 conduct multivariate data analysis on friction data alone (to eliminate redundant variables and
728 identify relevant variables/friction regimes) and in conjunction with other data collected

729 [Figure 6 here]

Declarations

This work was supported by the Baillet Latour Fund within the framework of a scholarship for doctoral students.

6 References

Arvidsson, M., Ringstad, L., Skedung, L., Duvefelt, K., & Rutland, M. W. (2017). Feeling fine - the effect of topography and friction on perceived roughness and slipperiness. *Biotribology*, *11*(January), 92–101. https://doi.org/10.1016/j.biotri.2017.01.002

Baier, S. K., Elmore, D., Guthrie, B., Lindgren, T., Smith, S., Steinbach, A., … Läuger, J. (2009). A new tribological device for assessing mouthfeel attributes of foods. *Paper Presented at the 5th International Symposium on Food Rheology and Structure, ETH Zürich*, 432–435.

Batchelor, H., Venables, R., Marriott, J., & Mills, T. (2015). The application of tribology in assessing texture perception of oral liquid medicines. *International Journal of Pharmaceutics*, *479*(2), 277–281. https://doi.org/10.1016/j.ijpharm.2015.01.004

Bellut, K., & Arendt, E. K. (2019). Chance and Challenge: Non-Saccharomyces Yeasts in Nonalcoholic and Low Alcohol Beer Brewing–A Review. *Journal of the American Society of Brewing Chemists*, *77*(2), 77–91. https://doi.org/10.1080/03610470.2019.1569452

Biegler, M., Delius, J., Käsdorf, B. T., Hofmann, T., & Lieleg, O. (2016). Cationic astringents alter the tribological and rheological properties of human saliva and salivary mucin solutions. *Biotribology*, *6*, 12–20. https://doi.org/10.1016/j.biotri.2016.03.002

Blau, P. J. (2001). The significance and use of the friction coefficient. *Tribology International*, *34*(9), 585–591. https://doi.org/10.1016/S0301-679X(01)00050-0

Blau, P. J. (2005). On the nature of running-in. *Tribology International*, *38*, 1007–1012. https://doi.org/10.1016/j.triboint.2005.07.020

Boehm, M. W., Yakubov, G. E., Stokes, J. R., & Baier, S. K. (2019). The role of saliva in oral processing: Reconsidering the breakdown path paradigm. *Journal of Texture Studies*, (January), 1–11. https://doi.org/10.1111/jtxs.12411

Bongaerts, J. H. H., Fourtouni, K., & Stokes, J. R. (2007). Soft-tribology: Lubrication in a compliant PDMS-PDMS contact. *Tribology International*, *40*(10-12 SPEC. ISS.), 1531–1542. https://doi.org/10.1016/j.triboint.2007.01.007

Bongaerts, J. H. H., Rossetti, D., & Stokes, J. R. (2007). The lubricating properties of human whole saliva. *Tribology Letters*, *27*(3), 277–287. https://doi.org/10.1007/s11249-007-9232-y

Brossard, N., Cai, H., Osorio, F., Bordeu, E., & Chen, J. (2016). “Oral” Tribological Study on the Astringency Sensation of Red Wines. *Journal of Texture Studies*, *47*(5), 392–402. https://doi.org/10.1111/jtxs.12184

Cai, H., Li, Y., & Chen, J. (2017). Rheology and Tribology Study of the Sensory Perception of Oral Care Products. *Biotribology*, *10*(May), 17–25. https://doi.org/10.1016/j.biotri.2017.03.001

Campbell, C. L., Foegeding, E. A., & van de Velde, F. (2017). A comparison of the lubrication behavior of whey protein model foods using tribology in linear and elliptical movement. *Journal of Texture Studies*, *48*(4), 335–341. https://doi.org/10.1111/jtxs.12278

Carpenter, G., Bozorgi, S., Vladescu, S., Forte, A. E., Myant, C., Potineni, R. V., … Baier, S. K. (2019). A study of saliva lubrication using a compliant oral mimic. *Food Hydrocolloids*, *92*(January), 10–18. https://doi.org/10.1016/j.foodhyd.2019.01.049

Carvalho-da-silva, A. M., Damme, I. Van, Taylor, W., Hort, J., & Wolf, B. (2013). Oral processing of two milk chocolate samples. *Food & Function*, *4*, 461–469. https://doi.org/10.1039/c2fo30173c

Chen, J. (2020). It is important to differentiate sensory property from the material property. *Trends in Food Science & Technology*, *96*(July), 268–270. https://doi.org/10.1016/j.tifs.2019.12.014

Chen, J., & Stokes, J. R. (2012). Rheology and tribology: Two distinctive regimes of food texture sensation. *Trends in Food Science and Technology*, *25*(1), 4–12. https://doi.org/10.1016/j.tifs.2011.11.006

Chen, L., & Opara, L. U. (2013). Approaches to analysis and modeling texture in fresh and processed foods – A review. *Journal of Food Engineering*, *119*(3), 497–507. https://doi.org/10.1016/j.jfoodeng.2013.06.028

Cheng, S., Gandevia, S. C., Green, M., Sinkus, R., & Bilston, L. E. (2011). Viscoelastic properties of the tongue and soft palate using MR elastography. *Journal of Biomechanics*, *44*(3), 450–454. https://doi.org/10.1016/j.jbiomech.2010.09.027

Chong, P. H., Chen, J., Yin, D., Upadhyay, R., Mo, L., & Han, L. (2019). “Oral” tribology study on saliva-tea compound mixtures: Correlation between sweet aftertaste (Huigan) perception and friction coefficient. *Food Research International*, *125*(January), 108642. https://doi.org/10.1016/j.foodres.2019.108642

Cohen, C., Restagno, F., Poulard, C., & Léger, L. (2011). Incidence of the molecular organization on friction

at soft polymer interfaces. *Soft Matter*, *7*(18), 8535–8541. https://doi.org/10.1039/c1sm05874f

De Almeida, P. D. V., Grégio, A. M. T., Machado, M. Â. N., De Lima, A. A. S., & Azevedo, L. R. (2008). Saliva composition and functions: A comprehensive review. *Journal of Contemporary Dental Practice*, *9*(3), 72–80. https://doi.org/10.5005/jcdp-9-3-72

De Vicente, J., Stokes, J. R., & Spikes, H. A. (2005). Lubrication properties of non-adsorbing polymer solutions in soft elastohydrodynamic (EHD) contacts. *Tribology International*, *38*(5), 515–526. https://doi.org/10.1016/j.triboint.2004.11.001

de Wijk, R. A., & Prinz, J. F. (2005). The role of friction in perceived oral texture. *Food Quality and Preference*, *16*(2), 121–129. https://doi.org/10.1016/j.foodqual.2004.03.002

Di Cicco, F., Oosterlinck, F., Tromp, H., & Sein, A. (2019). Comparative study of whey protein isolate gel and polydimethylsiloxane as tribological surfaces to differentiate friction properties of commercial yogurts. *Food Hydrocolloids*, *97*(July), 105204. https://doi.org/10.1016/j.foodhyd.2019.105204

Dowson, D. (1998). *History of Tribology* (2nd editio). London: Professional Engineering Publishers.

Dresselhuis, D. M., de Hoog, E. H. A., Cohen Stuart, M. A., & van Aken, G. A. (2008). Application of oral tissue in tribological measurements in an emulsion perception context. *Food Hydrocolloids*, *22*, 323–335. https://doi.org/10.1016/j.foodhyd.2006.12.008

Dresselhuis, D. M., Klok, H. J., Stuart, M. A. C., De Vries, R. J., Van Aken, G. A., & De Hoog, E. H. A. (2007). Tribology of o/w emulsions under mouth-like conditions: Determinants of friction. *Food Biophysics*, *2*(4), 158–171. https://doi.org/10.1007/s11483-007-9040-9

Fitzgerald, M. L., Tsai, S., Bellan, L. M., Sappington, R., Xu, Y., & Li, D. (2019). The relationship between the Young's modulus and dry etching rate of polydimethylsiloxane (PDMS). *Biomedical Microdevices*, *21*(1), 1–8. https://doi.org/10.1007/s10544-019-0379-8

Fuhrmann, P. L., Aguayo-Mendoza, M., Jansen, B., Stieger, M., & Scholten, E. (2020). Characterisation of friction behaviour of intact soft solid foods and food boli. *Food Hydrocolloids*, *100*(October 2019), 105441. https://doi.org/10.1016/j.foodhyd.2019.105441

Gabriele, A., Spyropoulos, F., & Norton, I. T. (2010). A conceptual model for fluid gel lubrication, 4205–4213. https://doi.org/10.1039/c001907k

Garrec, D. A., & Norton, I. T. (2012). Boundary lubrication by sodium salts: A Hofmeister series effect.

Journal of Colloid and Interface Science, *379*(1), 33–40. https://doi.org/10.1016/j.jcis.2012.04.049

Godoi, F. C., Bhandari, B. R., & Prakash, S. (2017). Tribo-rheology and sensory analysis of a dairy semi-solid. *Food Hydrocolloids*, *70*, 240–250. https://doi.org/10.1016/j.foodhyd.2017.04.011

Goh, S. M., Versluis, P., Appelqvist, I. A. M., & Bialek, L. (2010). Tribological measurements of foods using a rheometer. *Food Research International*, *43*(1), 183–186. https://doi.org/10.1016/j.foodres.2009.09.024

Goiris, K., Jaskula-Goiris, B., Syryn, E., Van Opstaele, F., De Rouck, G., Aerts, G., & De Cooman, L. (2014). The flavoring potential of hop polyphenols in beer. *Journal of the American Society of Brewing Chemists*, *72*(2), 135–142. https://doi.org/10.1094/ASBCJ-2014-0327-01

Guinard, J., & Mazzucchelli, R. (1996). The sensory perception of texture and mouthfeel. *Trends in Food Science & Technology*, *7*(July), 213–219.

Hanh, A. R., & Frank, M. E. (2014). *Fundamentals of oral histology and physiology*. Wiley Blackwell, USA.

He, Q., Bramante, F., Davies, A., Elleman, C., Fourtouni, K., & Wolf, B. (2018). Material properties of ex-vivo milk chocolate boluses examined in relation to texture perception. *Food and Function*, *9*, 3532–3546. https://doi.org/10.1039/C8FO00548F

He, Q., Hort, J., & Wolf, B. (2016). Predicting sensory perceptions of thickened solutions based on rheological analysis. *Food Hydrocolloids*, *61*, 221–232. https://doi.org/10.1016/j.foodhyd.2016.05.010

Hemmilä, S., Cauich-Rodríguez, J. V., Kreutzer, J., & Kallio, P. (2012). Rapid, simple, and cost-effective treatments to achieve long-term hydrophilic PDMS surfaces. *Applied Surface Science*, *258*(24), 9864–9875. https://doi.org/10.1016/j.apsusc.2012.06.044

Humphrey, S. P., & Williamson, R. T. (2001). A review of saliva: Normal composition, flow, and function. *The Journal of Prosthetic Dentistry*, *85*(2), 162–169.

Hutchings, I., Gee, M., & Santner, E. (2006). Friction and Wear. In H. Czichos, T. Saito, & L. Smith (Eds.), *Springer Handbook of Materials Measurement Methods*. Springer Berlin Heidelberg. https://doi.org/https://doi.org/10.1007/978-3-540-30300-8_13

Hutchings, J. B., & Lillford, P. J. (1988). The Perception of Food Texture - The Philosophy of the Breakdown Path. *Journal of Texture Studies*, *19*(2), 103–115. https://doi.org/10.1111/j.1745-

4603.1988.tb00928.x

Jacobson, B. (2003). The Stribeck memorial lecture, *36*, 781–789. https://doi.org/10.1016/S0301-679X(03)00094-X

Jost, H. (1966). *Lubrication (tribology), education and research; a report on the present position and industry's needs*. H.M. Stationery Office, London.

Joyner, H. S., Pernell, C. W., & Daubert, C. R. (2014a). Beyond surface selection: The impact of different methodologies on tribological measurements. *Journal of Food Engineering*, *134*, 45–58. https://doi.org/10.1016/j.jfoodeng.2014.03.003

Joyner, H. S., Pernell, C. W., & Daubert, C. R. (2014b). Impact of Oil-in-Water Emulsion Composition and Preparation Method on Emulsion Physical Properties and Friction Behaviors. *Tribology Letters*, *56*, 143–160. https://doi.org/10.1007/s11249-014-0393-1

Joyner, H. S., Pernell, C. W., & Daubert, C. R. (2014c). Impact of parameter settings on normal force and gap height during tribological measurements. *Journal of Food Engineering*, *137*, 51–63. https://doi.org/10.1016/j.jfoodeng.2014.03.019

Kieserling, K., Schalow, S., & Drusch, S. (2018). Method Development and Validation of Tribological Measurements for Differentiation of Food in a Rheometer. *Biotribology*, *16*(January), 25–34. https://doi.org/10.1016/j.biotri.2018.09.002

Kim, J. M., Wolf, F., & Baier, S. K. (2015). Effect of varying mixing ratio of PDMS on the consistency of the soft-contact Stribeck curve for glycerol solutions. *Tribology International*, *89*, 46–53. https://doi.org/10.1016/j.triboint.2014.12.010

Kiumarsi, M., Shahbazi, M., Yeganehzad, S., Majchrzak, O. L., & Benjamin, W. (2019). Relation between structural, mechanical and sensory properties of gluten-free bread as affected by modified dietary fibers. *Food Chemistry*, *277*, 664–673. https://doi.org/10.1016/j.foodchem.2018.11.015

Kokini, J. L., Kadane, J. B., & Cussler, E. L. (1977). Liquid Texture Perceived in the Mouth. *Journal of Texture Studies*, *8*(2), 195–218. https://doi.org/10.1111/j.1745-4603.1977.tb01175.x

Krebs, G., Müller, M., Becker, T., & Gastl, M. (2019). Characterization of the macromolecular and sensory profile of non-alcoholic beers produced with various methods. *Food Research International*, *116*(August 2018), 508–517. https://doi.org/10.1016/j.foodres.2018.08.067

Krop, E. M., Hetherington, M. M., Holmes, M., Miquel, S., & Sarkar, A. (2019). On relating rheology and oral tribology to sensory properties in hydrogels. *Food Hydrocolloids*, *88*(April 2018), 101–113. https://doi.org/10.1016/j.foodhyd.2018.09.040

Krzeminski, A., Wohlhüter, S., Heyer, P., Utz, J., & Hinrichs, J. (2012). Measurement of lubricating properties in a tribosystem with different surface roughness. *International Dairy Journal*, *26*(1), 23–30. https://doi.org/10.1016/j.idairyj.2012.02.005

Laguna, L., Bartolomé, B., & Moreno-Arribas, M. V. (2017). Mouthfeel perception of wine: Oral physiology, components and instrumental characterization. *Trends in Food Science and Technology*, *59*, 49–59. https://doi.org/10.1016/j.tifs.2016.10.011

Laguna, L., & Sarkar, A. (2017). Oral tribology: update on the relevance to study astringency in wines. *Tribology - Materials, Surfaces and Interfaces*, *11*(2), 116–123. https://doi.org/10.1080/17515831.2017.1347736

Laguna, L., Sarkar, A., Bryant, M. G., Beadling, A. R., Bartolomé, B., & Victoria Moreno-Arribas, M. (2017). Exploring mouthfeel in model wines: Sensory-to-instrumental approaches. *Food Research International*, *102*(January), 478–486. https://doi.org/10.1016/j.foodres.2017.09.009

Laiho, S., Williams, R. P. W., Poelman, A., Appelqvist, I., & Logan, A. (2017). Effect of whey protein phase volume on the tribology, rheology and sensory properties of fat-free stirred yoghurts. *Food Hydrocolloids*, *67*, 166–177. https://doi.org/10.1016/j.foodhyd.2017.01.017

Langenaeken, N. A., De Schutter, D. P., & Courtin, C. M. (2020). Arabinoxylan from non-malted cereals can act as mouthfeel contributor in beer. *Carbohydrate Polymers*, *239*(December 2019), 116257. https://doi.org/10.1016/j.carbpol.2020.116257

Lee, J. N., Park, C., & Whitesides, G. M. (2003). Solvent Compatibility of Poly(dimethylsiloxane)-Based Microfluidic Devices. *Analytical Chemistry*, *75*(23), 6544–6554. https://doi.org/10.1021/ac0346712

Li, Y., Joyner, H. S., Carter, B. G., & Drake, M. A. (2018). Effects of fat content, pasteurization method, homogenization pressure, and storage time on the mechanical and sensory properties of bovine milk. *Journal of Dairy Science*, *101*, 2941–2955. https://doi.org/10.3168/jds.2017-13568

Li, Y., Joyner, H. S., Lee, A. P., & Drake, M. A. (2018). Impact of pasteurization method and fat on milk: Relationships among rheological, tribological, and astringency behaviors. *International Dairy Journal*,

78, 28–35. https://doi.org/10.1016/j.idairyj.2017.10.006

Macakova, L., Yakubov, G. E., Plunkett, M. A., & Stokes, J. R. (2011). Influence of ionic strength on the tribological properties of pre-adsorbed salivary films. *Tribology International*, *44*(9), 956–962. https://doi.org/10.1016/j.triboint.2010.12.006

Malone, M. E., Appelqvist, I. A. M., & Norton, I. T. (2003). Oral behaviour of food hydrocolloids and emulsions. Part 1. Lubrication and deposition considerations. *Food Hydrocolloids*, *17*(6), 763–773. https://doi.org/10.1016/S0268-005X(03)00097-3

Martin, A., Clain, J., Buguin, A., & Brochard-Wyart, F. (2002). Wetting transitions at soft, sliding interfaces. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics*, *65*(3), 031605/1-031605/4. https://doi.org/10.1103/PhysRevE.65.031605

Mei, H. C. Van Der, White, D. J., & Busscher, H. J. (2004). On the wettability of soft tissues in the human oral cavity, 671–673. https://doi.org/10.1016/j.archoralbio.2004.03.002

Minekus, M., Alminger, M., Alvito, P., Ballance, S., Bohn, T., Bourlieu, C., … Brodkorb, A. (2014). A standardised static in vitro digestion method suitable for food - an international consensus. *Food and Function*, *5*(6), 1113–1124. https://doi.org/10.1039/c3fo60702j

Morell, P., Chen, J., & Fiszman, S. (2017). The role of starch and saliva in tribology studies and the sensory perception of protein-added yogurts. *Food and Function*, *8*(2), 545–553. https://doi.org/10.1039/c6fo00259e

Myant, C., Spikes, H. A., & Stokes, J. R. (2010). Influence of load and elastic properties on the rolling and sliding friction of lubricated compliant contacts. *Tribology International*, *43*(1–2), 55–63. https://doi.org/10.1016/j.triboint.2009.04.034

Ng, S., Nguyen, P., Bhandari, B., & Prakash, S. (2017). Influence of different functional ingredients on physical properties, rheology, tribology and oral perceptions of no fat stirred yoghurt. *Journal of Texture Studies*, *49*(3), 274–285. https://doi.org/10.1111/jtxs.12307

Nguyen, P. T. M., Bhandari, B., & Prakash, S. (2016). Tribological method to measure lubricating properties of dairy products. *Journal of Food Engineering*, *168*, 27–34. https://doi.org/10.1016/j.jfoodeng.2015.07.011

Nguyen, P. T. M., Kravchuk, O., Bhandari, B., & Prakash, S. (2017). Effect of different hydrocolloids on

texture, rheology, tribology and sensory perception of texture and mouthfeel of low-fat pot-set yoghurt. *Food Hydrocolloids*, *72*, 90–104. https://doi.org/10.1016/j.foodhyd.2017.05.035

Ningtyas, D. W., Bhandari, B., Bansal, N., & Prakash, S. (2017). A tribological analysis of cream cheeses manufactured with different fat content. *International Dairy Journal*, *73*, 155–165. https://doi.org/10.1016/j.idairyj.2017.06.005

Ningtyas, D. W., Bhandari, B., Bansal, N., & Prakash, S. (2019). Sequential aspects of cream cheese texture perception using temporal dominance ofsensations (TDS) tool and its relation with flow and lubrication behaviour. *Food Research International*, *120*, 586–594. https://doi.org/10.1016/j.foodres.2018.11.009

Oladokun, O., Tarrega, A., James, S., Smart, K., Hort, J., & Cook, D. (2016). The impact of hop bitter acid and polyphenol profiles on the perceived bitterness of beer. *Food Chemistry*, *205*, 212–220. https://doi.org/10.1016/j.foodchem.2016.03.023

Pandey, A., Karpitschka, S., Venner, C. H., & Snoeijer, J. H. (2016). Lubrication of soft viscoelastic solids. *Journal of Fluid Mechanics*, *799*, 433–447. https://doi.org/10.1017/jfm.2016.375

Pang, Z., Xu, R., Zhu, Y., Li, H., Bansal, N., & Liu, X. (2019). Comparison of rheological, tribological, and microstructural properties of soymilk gels acidified with glucono-δ-lactone or culture. *Food Research International*, *121*(June 2018), 798–805. https://doi.org/10.1016/j.foodres.2018.12.062

Pitenis, A. A., Urueña, J. M., Hormel, T. T., Bhattacharjee, T., Niemi, S. R., Marshall, S. L., … Sawyer, W. G. (2017). Corneal cell friction: Survival, lubricity, tear films, and mucin production over extended duration in vitro studies. *Biotribology*, *11*(November 2016), 77–83. https://doi.org/10.1016/j.biotri.2017.04.003

Pondicherry, K. S., Rummel, F., & Laeuger, J. (2018). Extended stribeck curves for food samples. *Biosurface and Biotribology*, *4*(1), 34–37. https://doi.org/10.1049/bsbt.2018.0003

Pradal, C., & Stokes, J. R. (2016). Oral tribology: Bridging the gap between physical measurements and sensory experience. *Current Opinion in Food Science*, *9*, 34–41. https://doi.org/10.1016/j.cofs.2016.04.008

Prakash, S. (2016). From Rheology to Tribology: Applications of Tribology in Studying Food Oral Processing and Texture Perception. In J. Ahmed, P. Ptaszek, & S. Basu (Eds.), *Advances in Food Rheology and Its*

Applications (pp. 65–86). Elsevier Ltd. https://doi.org/10.1016/B978-0-08-100431-9.00004-8

Prakash, S., Tan, D. D. Y., & Chen, J. (2013). Applications of tribology in studying food oral processing and texture perception. *Food Research International*, *54*(2), 1627–1635. https://doi.org/10.1016/j.foodres.2013.10.010

Ranc, H., Elkhyat, A., Servais, C., Mac-Mary, S., Launay, B., & Humbert, P. (2006). Friction coefficient and wettability of oral mucosal tissue: Changes induced by a salivary layer. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, *276*(1–3), 155–161. https://doi.org/10.1016/j.colsurfa.2005.10.033

Rudge, R. E. D., Scholten, E., & Dijksman, J. A. (2020). Natural and induced surface roughness determine frictional regimes in hydrogel pairs. *Tribology International*, *141*(July 2019), 105903. https://doi.org/10.1016/j.triboint.2019.105903

Rudge, R. E., Scholten, E., & Dijksman, J. A. (2019). Advances and challenges in soft tribology with applications to foods. *Current Opinion in Food Science*, *27*, 90–97. https://doi.org/10.1016/j.cofs.2019.06.011

Samaroo, K. J., Tan, M., Andresen Eguiluz, R. C., Gourdon, D., Putnam, D., & Bonassar, L. J. (2017). Tunable Lubricin-mimetics for Boundary Lubrication of Cartilage. *Biotribology*, *9*, 18–23. https://doi.org/10.1016/j.biotri.2017.02.001

Sanahuja, S., Upadhyay, R., Briesen, H., Chen, J., Street, X., & Street, X. (2017). Spectral analysis of the stick-slip phenomenon in “oral” tribological texture evaluation. *Journal of Texture Studies*, *48*(4), 318–334. https://doi.org/10.1111/jtxs.12266

Sarkar, A., Andablo-Reyes, E., Bryant, M., Dowson, D., & Neville, A. (2019). Lubrication of soft oral surfaces. *Current Opinion in Colloid and Interface Science*, *39*(February), 61–75. https://doi.org/10.1016/j.cocis.2019.01.008

Sarkar, A., Kanti, F., Gulotta, A., Murray, B. S., & Zhang, S. (2017). Aqueous lubrication, structure and rheological properties of whey protein microgel Particles. *Langmuir*, *33*(51), 14699–14708. https://doi.org/10.1021/acs.langmuir.7b03627

Sarkar, A., & Krop, E. M. (2019). Marrying oral tribology to sensory perception: a systematic review. *Current Opinion in Food Science*, *27*, 64–73. https://doi.org/10.1016/j.cofs.2019.05.007

Sarkar, A., Xu, F., & Lee, S. (2019). Human saliva and model saliva at bulk to adsorbed phases – similarities and differences. *Advances in Colloid and Interface Science*, *273*, 102034. https://doi.org/10.1016/j.cis.2019.102034

Schipper, R. G., Silletti, E., & Vingerhoeds, M. H. (2007). Saliva as research material: Biochemical, physicochemical and practical aspects. *Archives of Oral Biology*, *52*, 1114–1135. https://doi.org/10.1016/j.archoralbio.2007.06.009

Selway, N., Chan, V., & Stokes, J. R. (2017). Influence of fluid viscosity and wetting on multiscale viscoelastic lubrication in soft tribological contacts. *Soft Matter*, *13*(8), 1702–1715. https://doi.org/10.1039/c6sm02417c

Selway, N., & Stokes, J. R. (2014). Soft Materials Deformation, Flow, and Lubrication Between Compliant Substrates: Impact on Flow Behavior, Mouthfeel, Stability, and Flavor. *Annual Review of Food Science and Technology*, *5*(1), 373–393. https://doi.org/10.1146/annurev-food-030212-182657

Shahsavan, H., Quinn, J., d'Eon, J., & Zhao, B. (2015). Surface modification of polydimethylsiloxane elastomer for stable hydrophilicity, optical transparency and film lubrication. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, *482*, 267–275. https://doi.org/10.1016/j.colsurfa.2015.05.024

Shewan, H. M., Pradal, C., & Stokes, J. R. (2019). Tribology and its growing use toward the study of food oral processing and sensory perception. *Journal of Texture Studies*, (March), 1–16. https://doi.org/10.1111/jtxs.12452

Smith, S. A., Guthrie, B., Steinbach, A., Lindgren, T., & Debon, S. (2015). Determining causal relationships between physical structure and sensory function in food systems via partial least squares (PLS) path modelling. *ACS Symposium Series*, *1191*, 313–332. https://doi.org/10.1021/bk-2015-1191.ch022

Sonne, A., Busch-Stockfisch, M., Weiss, J., & Hinrichs, J. (2014). Improved mapping of in-mouth creaminess of semi-solid dairy products by combining rheology, particle size, and tribology data. *LWT - Food Science and Technology*, *59*(1), 342–347. https://doi.org/10.1016/j.lwt.2014.05.047

Steinbach, A., Guthrie, B., Smith, S., Lindgren, T., & Debon, S. (2014). Normal force-controlled tribological measurement of soft drinks and lubrication additives. *Journal of Food Measurement and Characterization*, *8*(2), 142–148. https://doi.org/10.1007/s11694-014-9174-7

Stevenson, H., Jaggard, M., Akhbari, P., Vaghela, U., Gupte, C., & Cann, P. (2019). The role of denatured synovial fluid proteins in the lubrication of artificial joints. *Biotribology*, *17*, 49–63. https://doi.org/10.1016/j.biotri.2019.03.003

Stokes, J. R. (2012). ' Oral ' Tribology. In J. Chen & L. Engelen (Eds.), *Food Oral Processing: Fundamentals of Eating and Sensory Perception* (First edit, pp. 265–287). Blackwell Publishing Ltd. https://doi.org/https://doi.org/10.1002/9781444360943.ch12

Stokes, J. R., Boehm, M. W., & Baier, S. K. (2013). Oral processing, texture and mouthfeel: From rheology to tribology and beyond. *Current Opinion in Colloid and Interface Science*, *18*(4), 349–359. https://doi.org/10.1016/j.cocis.2013.04.010

Stokes, J. R., Macakova, L., Chojnicka-Paszun, A., De Kruif, C. G., & De Jongh, H. H. J. (2011). Lubrication, adsorption, and rheology of aqueous polysaccharide solutions. *Langmuir*, *27*(7), 3474–3484. https://doi.org/10.1021/la104040d

Tan, S. H., Nguyen, N. T., Chua, Y. C., & Kang, T. G. (2010). Oxygen plasma treatment for reducing hydrophobicity of a sealed polydimethylsiloxane microchannel. *Biomicrofluidics*, *4*(3), 1–8. https://doi.org/10.1063/1.3466882

Timm, K., Myant, C., Spikes, H. A., & Grunze, M. (2011). Particulate lubricants in cosmetic applications. *Tribology International*, *44*(12), 1695–1703. https://doi.org/10.1016/j.triboint.2011.06.017

Torres, O., Yamada, A., Rigby, N. M., Hanawa, T., Kawano, Y., & Sarkar, A. (2019). Gellan gum: A new member in the dysphagia thickener family. *Biotribology*, *17*(November 2018), 8–18. https://doi.org/10.1016/j.biotri.2019.02.002

Upadhyay, R., & Chen, J. (2019). Smoothness as a tactile percept: Correlating 'oral' tribology with sensory measurements. *Food Hydrocolloids*, *87*(February 2018), 38–47. https://doi.org/10.1016/j.foodhyd.2018.07.036

Urueña, J. M., McGhee, E. O., Angelini, T. E., Dowson, D., Sawyer, W. G., & Pitenis, A. A. (2018). Normal Load Scaling of Friction in Gemini Hydrogels. *Biotribology*, *13*(October 2017), 30–35. https://doi.org/10.1016/j.biotri.2018.01.002

Vakis, A. I., Yastrebov, V. A., Scheibert, J., Nicola, L., Dini, D., Minfray, C., … Ciavarella, M. (2018). Modeling and simulation in tribology across scales: An overview. *Tribology International*, *125*(February), 169–

199. https://doi.org/10.1016/j.triboint.2018.02.005

van Stee, M. A., de Hoog, E., & van de Velde, F. (2017). Oral Parameters Affecting Ex-vivo Tribology. *Biotribology*, *11*, 84–91. https://doi.org/10.1016/j.biotri.2017.05.001

Voutat, C., Nohava, J., Wandel, J., & Zysset, P. (2019). The Dynamic Friction Coefficient of the Wet Bone-Implant Interface: Influence of Load, Speed, Material and Surface Finish. *Biotribology*, *17*, 64–74. https://doi.org/10.1016/j.biotri.2019.03.002

Wagoner, T. B., Çakır-Fuller, E., Shingleton, R., Drake, M., & Foegeding, E. A. (2019). Viscosity drives texture perception of protein beverages more than hydrocolloid type. *Journal of Texture Studies*, (July), 1–14. https://doi.org/10.1111/jtxs.12471

Wandersman, E., Candelier, R., Debrégeas, G., & Prevost, A. (2011). Texture-induced modulations of friction force: The fingerprint effect. *Physical Review Letters*, *107*(16), 1–5. https://doi.org/10.1103/PhysRevLett.107.164301

Wang, S., Olarte Mantilla, S. M., Smith, P. A., Stokes, J. R., & Smyth, H. E. (2020). Astringency sub-qualities drying and pucker are driven by tannin and pH – Insights from sensory and tribology of a model wine system. *Food Hydrocolloids*, *109*(April), 106109. https://doi.org/10.1016/j.foodhyd.2020.106109

Wang, X., Wang, X., Upadhyay, R., & Chen, J. (2019). Topographic study of human tongue in relation to oral tribology. *Food Hydrocolloids*, *95*, 116–121. https://doi.org/10.1016/j.foodhyd.2019.04.022

Wang, Z., Volinsky, A. A., & Gallant, N. D. (2014). Crosslinking Effect on Polydimethylsiloxane Elastic Modulus Measured by Custom-Built Compression Instrument. *Journal of Applied Polymer Science*, *41050*, 1–4. https://doi.org/10.1002/app.41050

Witt, T., & Stokes, J. R. (2015). Physics of food structure breakdown and bolus formation during oral processing of hard and soft solids. *Current Opinion in Food Science*, *3*, 110–117. https://doi.org/10.1016/j.cofs.2015.06.011

Yakubov, G. E., Branfield, T. E., Bongaerts, J. H. H., & Stokes, J. R. (2015). Tribology of particle suspensions in rolling-sliding soft contacts. *Biotribology*, *3*, 1–10. https://doi.org/10.1016/j.biotri.2015.09.003

Yashima, S., Romero, V., Wandersman, E., Frétigny, C., Chaudhury, M. K., Chateauminois, A., & Prevost, A. M. (2015). Normal contact and friction of rubber with model randomly rough surfaces. *Soft Matter*, *11*(5), 871–881. https://doi.org/10.1039/c4sm02346c

Compound name	Chemical formula	Upadhyay & Chen (2019)	Minekus et al. (2014)	Krop et al. (2019; Torres et al. 2019)	Laguna et al. (2017)	Cai et al. (2017)	Sarkar et al. (2019)
pH		7	7	6.8			
Sodium chloride	NaCl	0.117		0.16	1.594	0.111	1.594
Ammonium nitrate	NH4NO3			0.33			0.328
Dipotassium phosphate	K2HPO4			0.64	0.636		0.636
Potassium citrate monohydrate	KH2PO4		0.5032				
Monopotassium phosphate	KCl	0.149	1.13	0.2	0.202	1.492	0.202
Potassium citrate monohydrate	K3C6H5O7.H2O			0.31			0.308
Uric acid	C5H3N4O3Na			0.02	0.021		0.021
Urea	H2NCONH2			0.2	0.198		0.198
Sodium lactate	C3H5O3Na			0.15			0.146
Sodium carbonate	NaHCO3	2.1	1.14			3.948	
Magnesium chloride	MgCl2(H2O)6		0.031			0.096	
Ammonium carbonate	(NH4)2CO3		0.006				
Calcium chloride	CaCl2		0.083			0.278	
Carboxymethylcellulose	-					0.65	
Glycerin	C3H8O3					1	
Porcine gastric mucin type II	-	1.5		3	3	1.2	0-30
Alpha-amylase	-	2 g/L	75 U/mL	75 U/mL		2.0 g/L	

Table 1: Overview of various recipes for artificial saliva from literature.

Purpose	Food	Tribological attachment	Tribopairs		F_N (N)	T (°C)	U (mm/s)	Reference
			Upper	Lower				
Saliva lubricity and cationic astringents (Mech/app)	Saliva, astringent cations	Ball-on-3 pins	Steel ball	PDMS (lab made)	6	N/A	0.01-1000, 60 mins @ 1	(Biegler, Delius, Käsdorf, Hofmann, & Lieleg, 2016)
Modified dietary fibres e.o. structural, mechanical, sensory (Appl)	Gluten-free bread	Three-balls on sample	Steel ball	Bread	0.2	20	1	(Kiumarsi, Shahbazi, Yeganehzad, Majchrzak, & Benjamin, 2019)
Ex-vivo chocolate boluses, material properties and texture perception (Appl)	Chocolate	Ball-on-3 plates	Steel ball	PDMS (lab made)	3	40	0.02-750	(He et al., 2018)
Differentiation of two chocolate samples with identical composition and viscosity (Appl)	Chocolate	Ball-on-3 plates	Steel ball	Polyurethane	0.5	37	0.001-420	(Carvalho-da-silva et al., 2013)
Investigate discrimination by sensory compared to tribo and rheo (Appl)	Custard, starch, carrageenan, fat	Half-ring-on-plate	Steel ring	Surgical tape	2	35	0.15-100	(Godoi et al., 2017)
Development of tribological method for dairy (Meth)	Milk, cream cheeses	Half-ring-on-plate	Steel ring	Surgical tape	1, 2	35	1-600	(Nguyen et al., 2016)
Mapping in-mouth creaminess (Appl)	Yoghurt	Ball-on-3 plates	Steel ball	SBR	3	10	0.0007-667	(Sonne et al., 2014)
Surface properties (R_a) to sensory (Meth/appl)	Demin, sunflower oil, yoghurt	Ball-on-3 plates	Steel ball	NR, FR, SBR, PTFE	3, 9	20	0.07-2000	(Krzeminski et al., 2012)
Compare whey protein isolate and PDMS for yoghurts (Meth)	Demin, sunflower oil, yoghurt	Ball-on-3 plates	Steel ball	WPI, PDMS	0.1	20	100-1, 1000-1, 200-2	(Di Cicco et al., 2019)
Whey protein phase volume, fat free yoghurts, rheology, tribo, sensory (Appl)	Fat-free yoghurts	Ball-on-3 plates	Steel ball	SBR	3	10	0.0007-667	(Laiho et al., 2017)
Gelatine, xanthan gum, carrageenan and modified starch e.o. texture of yoghurts (Mech/appl)	Yoghurt	Half-ring-on-plate	Steel ring	Surgical tape	2	35	0.008-60	(Nguyen et al., 2017)
Storage, homogenisation, pasteurisation, fat e.o. mechanical, sensory (Appl)	Milk	Double-ball-on-plate	Polypro-pylene	PDMS (lab made)	1	25	0,15-750	(Li, Joyner, Carter, et al., 2018)
Pasteurisation, storage and fat content e.o. rheo/tribo and astringency (Appl)	Milk	Double-ball-on-plate	Polypro-pylene	PDMS (lab made)	1	22	0.15-750	(Li, Joyner, Lee, et al., 2018)
Inulin, pectin, galacto-oligosacchs, beta glucan e.o. physical, rheo, tribo, sensory (Mech/appl)	Yoghurt	Half-ring-on-plate	Steel ring	Surgical tape	2	35	0.8-90	(Ng et al., 2017)
Temporal dominance sensations (TDS) and tribo (Mech/appl)	Cream cheese	Half-ring-on-plate	Steel ring	Surgical tape	2	35	0.1-600	(Ningtyas et al., 2019)

Fat e.o. tribo, rheo, structure (Mech)	Cream cheese	Half-ring-on-plate	Steel ring	Surgical tape	1, 2, 3, 5	35	0.3-300	(Ningtyas et al., 2017)
Introduction of attachment (Meth/appl)	Milk, maltodextrin, xanthan gum	Ball-on-3 plates	Steel ball	Thermoplastic elastomer	3	20	0.4-20	(Baier et al., 2009)
Tribo/rheo properties, glucone-delta-lactone or EPS cultures (Mech)	Soy yoghurt	Full ring-on-plate	Steel ring	Surgical tape	1	4	0.2-200	(Pang et al., 2019)
Demonstration reproducible results on soft drinks, comparison of MTM and MRC301 (Meth)	Soft drinks, guar gum, locust bean gum, sodium carboxymethyl cellulose	Ball-on-3 plates	Steel ball	SEBS	3	20	0.47-263	(Steinbach et al., 2014)
Method development and validation (Meth)	Demin, sunflower oil, yoghurt	Ball-on-plates/pins	Steel/ glass	PTFE, PDMS, SBR	3	20	10^{-6}-1000	(Kieserling et al., 2018)
Validation of tribo using rheometer (Meth)	Corn syrup	Double-ball-on plate	Steel ball	Silicon	3	20	0.23-2300	(Goh et al., 2010)
Influence of measurement methodology (Meth)	Mineral oil	Double-ball-on-plate/ball-on-3 plate	Polypro-pylene	PDMS, HDPE, WPI	3, 5	22	0.8-9	(Joyner et al., 2014a)
Emulsion pH, salt, homogenisation pressure e.o. friction, rheology and physics (Meth/appl)	Oil in water	Double-ball-on plate	Polypro-pylene	WPI	2, 1	25	10-1	(Joyner et al., 2014b)
Effect of parameter settings on F_N, D, μ (Meth)	Mineral oil	Double-ball-on plate	Polypro-pylene	WPI, steel	1, 2, 3, 5	22	0, 1, 10 RPM	(Joyner et al., 2014c)

Table 2: Table of original papers using rheometers with tribology attachments. Abbreviations: Approaches of investigation; Mech: Mechanism, Appl: Application, Meth: Method. E.o.: Effect on/of. Rheo: Rheological properties. Tribo: Tribological properties. EPS: Exopolysaccharides. F_N: Normal force. D: Gap distance between tribopairs. μ: Friction coefficient. T: Temperature. U: Entrainment speed; in cases where speed was not given in mm/s, this is based on own calculations. PDMS: Polydimethylsiloxane. WPI: Whey protein isolate. PTFE: Polytetrafluoroethylene. HDPE: High Density Polyethylene. SBR: Styrene butadiene rubber. NR: Natural rubber. FR: Foamed rubber. SEBS: Styrene–ethylene– butylene–styrene block co-polymer.

Figure 1:

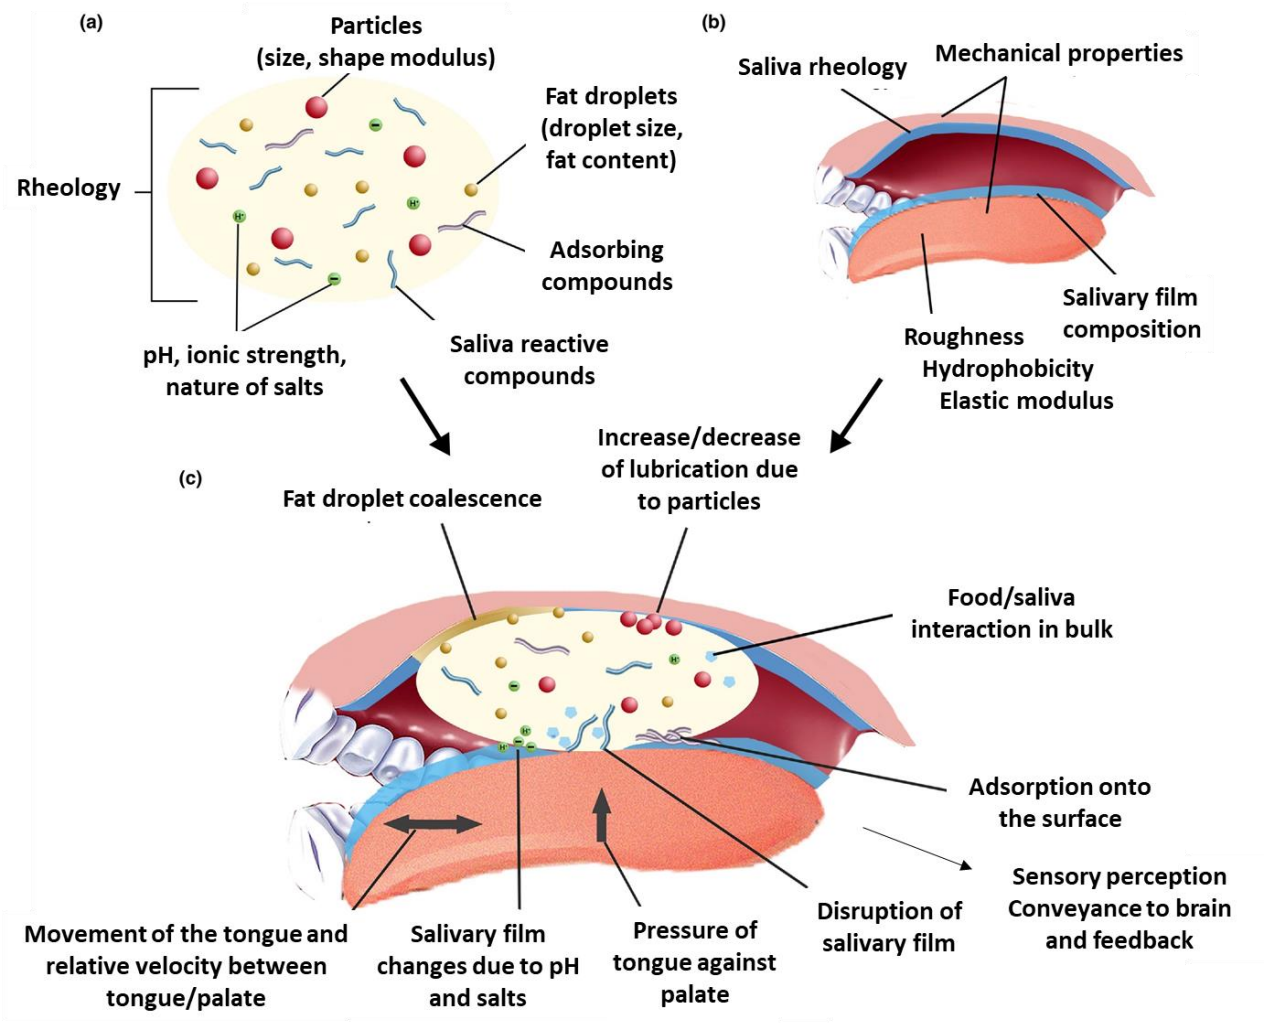

(a)
Particles
(size, shape modulus)
Rheology
Fat droplets
(droplet size,
fat content)
Adsorbing
compounds
pH, ionic strength,
nature of salts
Saliva reactive
compounds
(b)
Saliva rheology
Mechanical properties
Salivary film
composition
Roughness
Hydrophobicity
Elastic modulus
Increase/decrease
of lubrication due
to particles
(c)
Fat droplet coalescence
Food/saliva
interaction in bulk
Adsorption onto
the surface
Sensory perception
Conveyance to brain
and feedback
Disruption of
salivary film
Movement of the tongue and
relative velocity between
tongue/palate
Salivary film
changes due to pH
and salts
Pressure of
tongue against
palate

Figure 2:

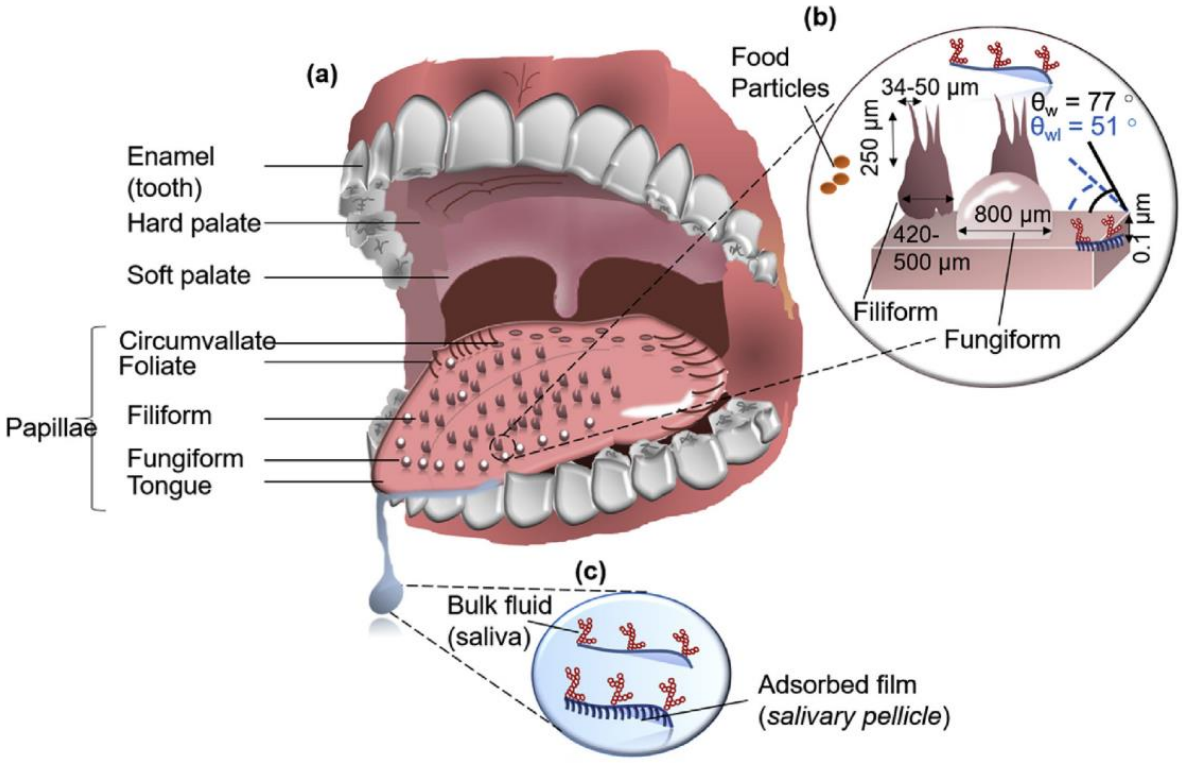

(a)
Enamel
(tooth)
Hard palate
Soft palate
Papillae
Circumvallate
Foliate
Filiform
Fungiform
Tongue
(b)
Food
Particles
34-50 µm
250 µm
θw = 77 °
θwl = 51 °
800 µm
420-
500 µm
0.1 µm
Filiform
Fungiform
(c)
Bulk fluid
(saliva)
Adsorbed film
(salivary pellicle)

Figure 3:

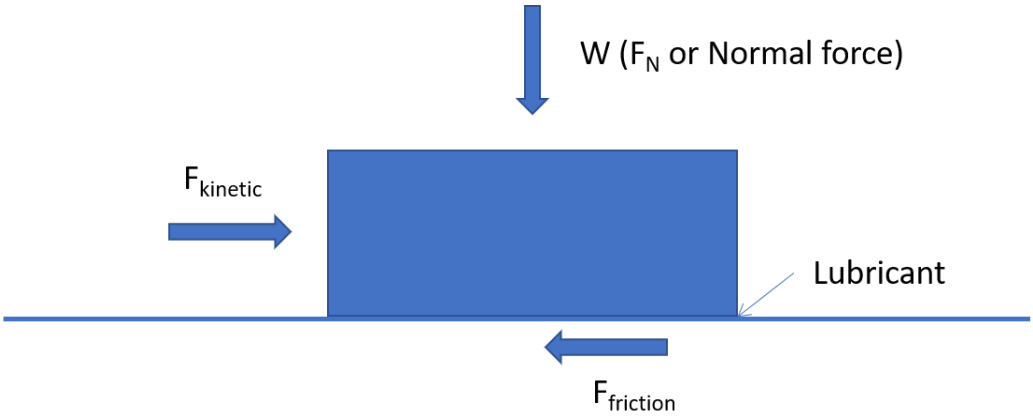


Figure 4:

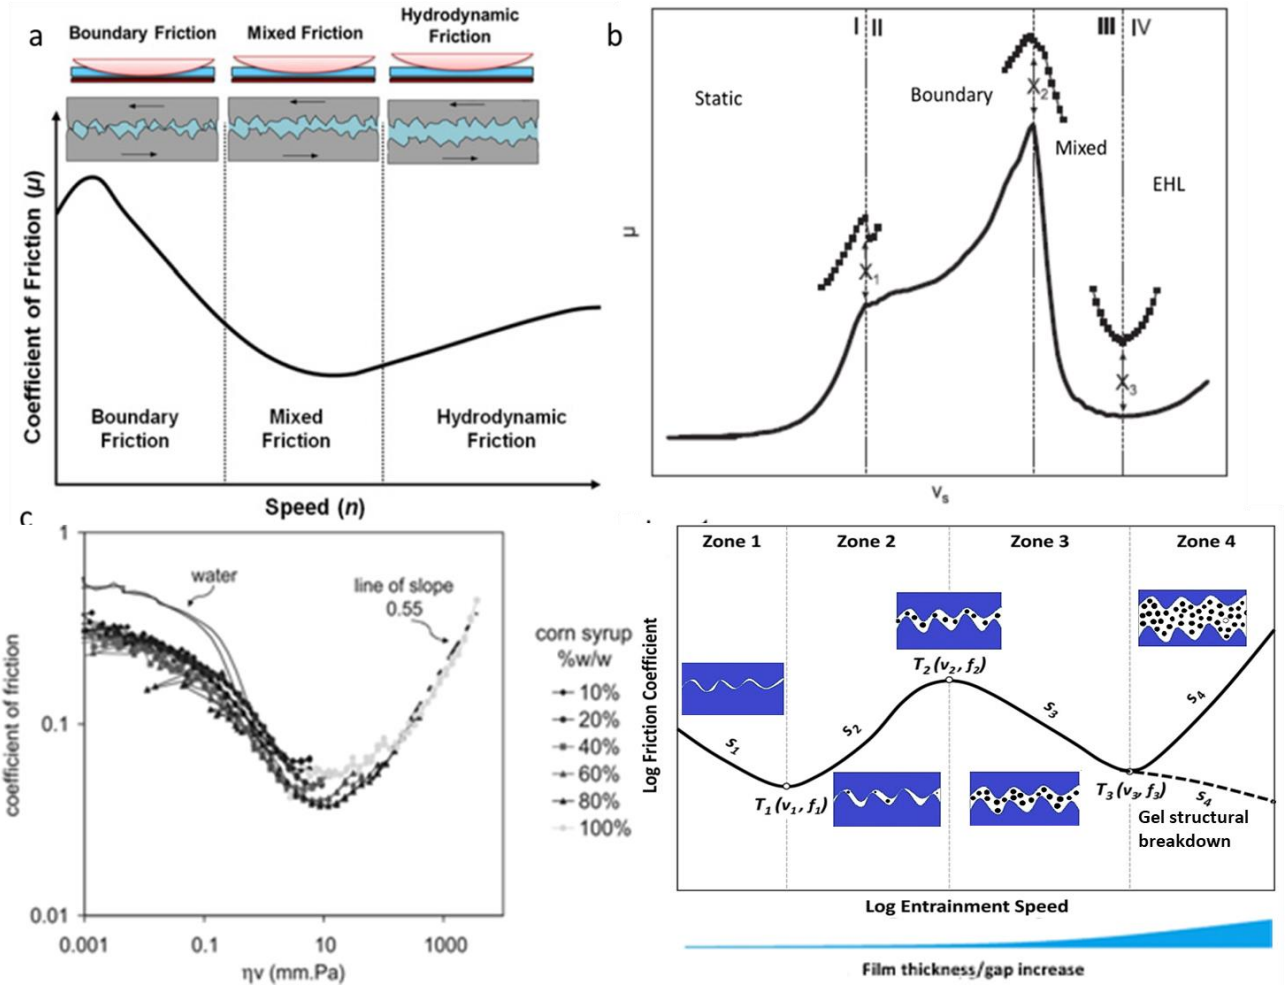

a
Boundary Friction
Mixed Friction
Hydrodynamic Friction
Coefficient of Friction (μ)
Boundary Friction
Mixed Friction
Hydrodynamic Friction
Speed (n)
b
I
II
III
IV
Static
Boundary
Mixed
EHL
X1
X2
X3
μ
Vs
c
coefficient of friction
water
line of slope 0.55
corn syrup %w/w
10%
20%
40%
60%
80%
100%
1
0.1
0.01
0.001
0.1
10
1000
ηv (mm.Pa)
Zone 1
Zone 2
Zone 3
Zone 4
Log Friction Coefficient
T1 (v1, f1)
T2 (v2, f2)
T3 (v3, f3)
s1
s2
s3
s4
Gel structural breakdown
Log Entrainment Speed
Film thickness/gap increase

Figure 5:

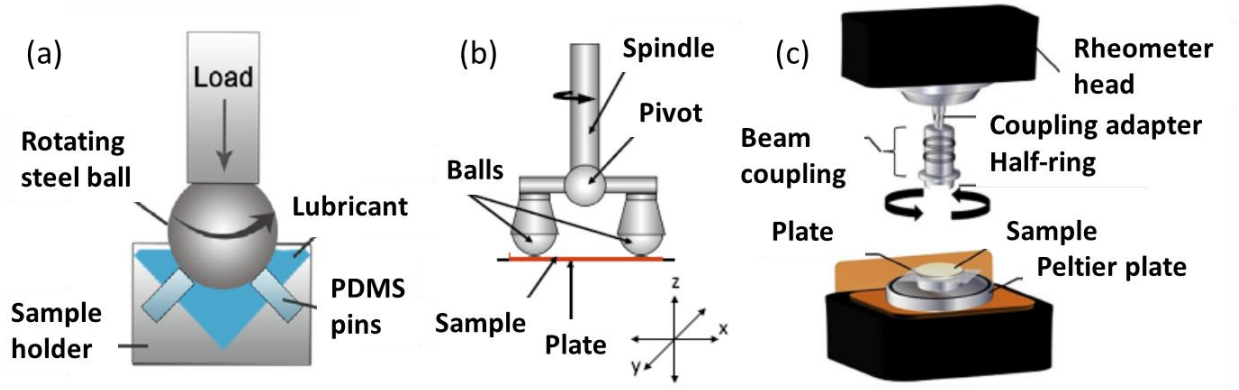

(a)
Load
Rotating steel ball
Lubricant
PDMS pins
Sample holder
(b)
Spindle
Pivot
Balls
Sample
Plate
z
x
y
(c)
Rheometer head
Coupling adapter
Beam coupling
Half-ring
Plate
Sample
Peltier plate

Figure 6:

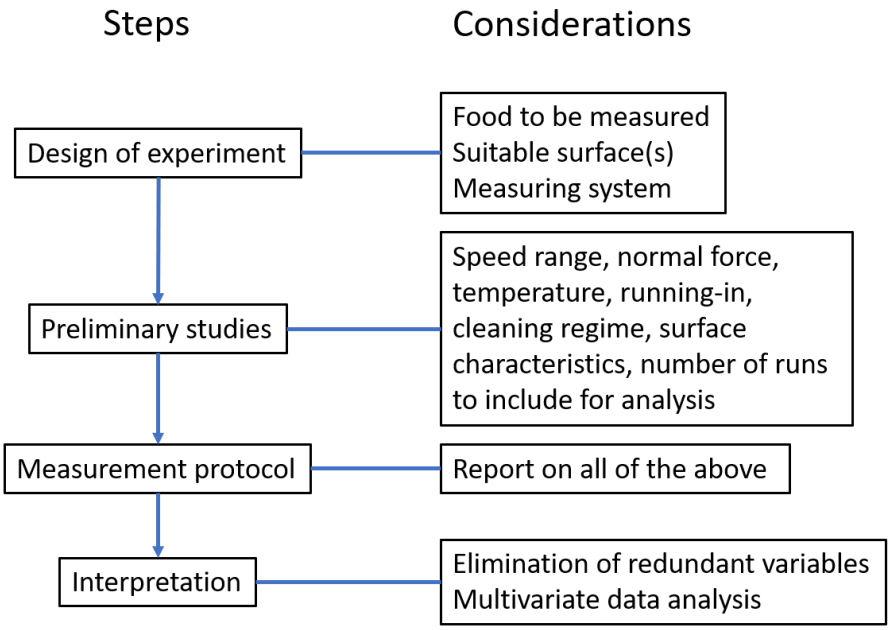

Steps
Considerations
Design of experiment
Food to be measured
Suitable surface(s)
Measuring system
Preliminary studies
Speed range, normal force, temperature, running-in, cleaning regime, surface characteristics, number of runs to include for analysis
Measurement protocol
Report on all of the above
Interpretation
Elimination of redundant variables
Multivariate data analysis

Figure captions

ALL FIGURES IN COLOUR PLEASE

Figure 1: Graphical representation of the characteristics of (a) the food, (b) the mouth, and (c) their interaction that are important for measuring mouthfeel with tribology. Adapted from (Pradal & Stokes, 2016)

Figure 2: Graphical representation of the physiology of the mouth. (a) Schematic illustration of oral cavity highlighting the soft (tongue) and hard (tooth enamel and palate) oral surfaces with the lubricant (saliva). (b) Building blocks of soft tongue surface (θ_w is the water contact angle, θ_{wl} is the water contact angle upon adsorption of salivary film of nanometre scale). (c) Bulk saliva and adsorbed salivary pellicle. Reproduced with permission from Sarkar et al. (2019)

Figure 3: Graphical representation of friction showing $F_{kinetic}$ (torque of the measuring system), F_N (the load, W), the lubricant and the $F_{Friction}$.

Figure 4: Four representations of Stribeck curves. (a) Classic Stribeck curve with graphical representation of gap distance (D) and asperity interactions. Adapted from Pondicherry et al. (2018). (b) Extended Stribeck curve showing the static regime and transition points. Adapted from Kieserling, Schalow, & Drusch (2018). (c) Example of Stribeck curve obtained by collapsing several measurements on fluids with varying viscosity (entrainment speed scaled by viscosity). Adapted from Goh, Versluis, Appelqvist, & Bialek (2010). This Master curve (d) can then be approximated by fitting power law coefficients as per Bongaerts, Fourtouni and Stokes (2007). (d) Stribeck curve for a complex fluid (yoghurt) showing phase-dependent behaviour. Adapted from Nguyen, Kravchuk, Bhandari, & Prakash (2017).

Figure 5: Main tribological attachments used in literature. (a) Ball-on-3 plates, adapted from Shewan, Pradal and Stokes (2019). (b) Double ball-on-plate, adapted from Joyner, Pernell and Daubert (2014c). (c) Half-ring-on-plate, adapted from Godoi, Bhandari and Prakash (2017)

Figure 6: Graphical representation of suggested flow chart highlighting important steps and considerations at each step.