

Title	Parametric study of different shapes-slotted substrate integrated waveguide for wideband applications
Authors	Nakmouche, M. F.;Taher, Hany;Fawzy, D. E.;Kahraman, G.
Publication date	2019-01-17
Original Citation	Nakmouche, M. F., Taher, H., Fawzy, D. E. and Kahraman, G. (2018) 'Parametric Study of Different Shapes-Slotted Substrate Integrated Waveguide for Wideband Applications'. 2018 18th Mediterranean Microwave Symposium (MMS), Istanbul, Turkey, 31 October -2 November, pp. 251-254. doi: 10.1109/MMS.2018.8612114
Type of publication	Conference item
Link to publisher's version	https://ieeexplore.ieee.org/document/8612114 - 10.1109/MMS.2018.8612114
Rights	© 2018 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.
Download date	2026-09-22 04:20:41
Item downloaded from	https://hdl.handle.net/10468/7741



UCC

University College Cork, Ireland
 Coláiste na hOllscoile Corcaigh

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/328761207>

Parametric study of different shapes-slotted substrate integrated waveguide for wideband applications

Conference Paper · November 2018

CITATIONS

0

READS

58

4 authors, including:



Mohammed Farouk Nakmouche

Ege University

2 PUBLICATIONS 0 CITATIONS

SEE PROFILE

Parametric study of different shapes-slotted substrate integrated waveguide for wideband applications

Mohammed Farouk Nakmouche
Department of electrical and electronics engineering
Ege University
Izmir, Turkey
Nakmouche.MFarouk@gmail.com

Diaa E. Fawzy
Faculty of engineering
Izmir University of economics
Izmir, Turkey
diaa.fawzy@gmail.com

Hany Taher
Tyndall national Institute
Cork, Ireland
hany.taher@tyndall.ie

Gokalp Kahraman
Department of electrical and electronics engineering
Ege University
Izmir, Turkey
alpkah@gmail.com

Abstract— On the way to design Substrate Integrated Waveguide Bandpass Filter (SIW-BPF) for wideband applications a parametric study of the slot geometry etched on a SIW structure is the preliminary step to design such filter.

Three different structures, namely, H-Slotted, T-Slotted, and U-Slotted SIW is investigated in order to examine the effect of altering different geometrical parameter of the unit on its response. H-Slotted Electromagnetic Band Gap (EBG) shows the highest Fractional Band Width (FBW), which is about 90% compared to the others, consequently it could be used to design a wideband SIW-BPF.

Keywords—Bandpass filter (BPF); substrate integrated waveguide (SIW); electromagnetic band gap structure (EBG); Wideband; High Frequency Electromagnetic Field Simulation (HFSS).

I. INTRODUCTION

Most of the modern communication systems bring about the requirement of compact size, low cost, and low profile while maintaining high performance and by guaranteeing a vertical roaming between different applications.

Microwave filters are key components in modern communication systems. Different microwave components have been used in the design of microwave filters such as transmission lines, micro-strip, coplanar waveguide (CPW) and rectangular waveguide. However, they do not satisfy the requirement of modern communication systems and they are not suitable for easy integration. Substrate integrated waveguide (SIW), also named Laminated has been used in microwave and millimeter-wave component design as described by others [1–4].

Compared to conventional waveguide, SIW based components are of low cost fabrication, compact size, and present an easy integration with other microwave and millimeter-wave components, which they are assured by keeping the same advantages of the rectangular waveguide [5].

Recently, electromagnetic band gap (EBG) which was only used in photonic application, started to become popular in other

microwave and millimeter-wave application, and thus, they started to be used in the design of microwave and millimeter-wave components such as filters [6].

In a previous work, an S-Slotted EBG based SIW-BPF was designed and showed a fractional bandwidth of 7.31% [7]. Another U-Slotted EBG based SIW-BPF was presented in a different report, which showed a fractional bandwidth of 42% [8]. The necessity to extend the bandwidth is a dire need. A comparative parametric study between H-, U- and T-slotted EBG is performed in the current work. Therefore, the alteration of different geometrical parameters of the unit's effect on its response is also examined.

This paper is structured as follows: Section 2 presents the theory of SIW Structure and EBG. In Section 3, the effect of H-, U- and T-Slotted cells on the SIW structure performance is discussed. Finally, Section 4 is dedicated to the conclusion.

II. THEORETICAL BACKGROUND

A. Substrate Integrated Waveguide (SIW)

SIW is a periodic structure based on a dielectric substrate with linear arrays of metallic vias [10, 11]. The studies of microwave components based on SIW such as filters showed that SIW presents a very promising performance in the design of microwave and millimeter-wave components. The SIW must be free from any radiation loss and in order to ensure that, the effects of the spacing S and the diameter D was investigated [5], and the design rules for SIW was fixed as follows:

$$\frac{S}{D} < 2 \quad \text{and} \quad \frac{D}{W} < \frac{1}{5} \frac{0.1D^2}{W} \quad (1)$$

Following this rule and based on analysis, we can see that the performance of SIW is the same as a conventional rectangular waveguide. However, the SIW presents a compact size with an equivalent width W_{eff} compared with the conventional rectangular waveguide. Equations of the effective width and

the cutoff frequency have been presented in [12] and [13], as follows

$$W_{eff} = W - \frac{1.08D^2}{s} + \frac{0.1D^2}{W} \quad (2)$$

$$F_{TE10} = \frac{c}{2W_{eff} \cdot \sqrt{\epsilon_r}} \quad (3)$$

From this, realization methods of an SIW can be based on a conventional rectangular waveguide, and by means of (2) and (3) the SIW structure parameter design is obtained. The design procedure is summarized as follows:

- Step 01: Select $\frac{s}{D} < 2$
- Step 02: Select $\frac{D}{W} < \frac{1}{5}$
- Step 03: Calculate W_{eff} according to the operating frequency by solving (3).
- Step 04: Calculate W by solving (2).
- Step 05: Calculate D and S according to $\frac{D}{W} < \frac{1}{5}$ and $\frac{s}{D} < 2$

B. Electromagnetic Band Gap (EBG)

When an electromagnetic wave is transmitted, an echo dispersion occurs in a periodic medium structure. The complex structure, which presents this characteristic, is named electromagnetic bandgap structures-EBG.

The size and occurrence of the bandgap structure are the basic parameter in the EBG structure application. Relative permittivity of the medium and the size of EBG cell control the bandstop characteristic of EBG.

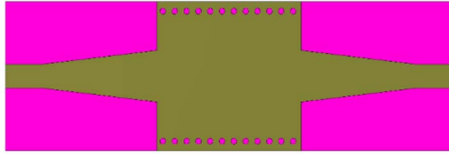


Fig.1. Configuration of conventional SIW.

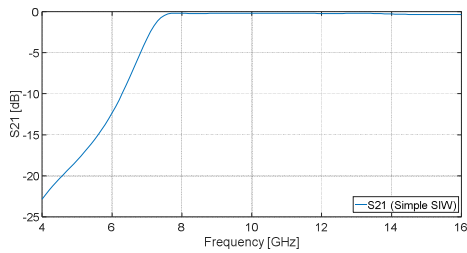


Fig.2. Simulated results of S-Parameter (Simple SIW)

III. ANALYSIS OF DIFFERENTSHAPES SLOTTED SIW

Different shapes slotted SIW circuits are examined. One dimension each time is varied while the other dimensions are kept constant to realize the influence of that parameter on the overall performance of the structure.

The geometrical dimensions of each structure under study are depicted in Fig.3.

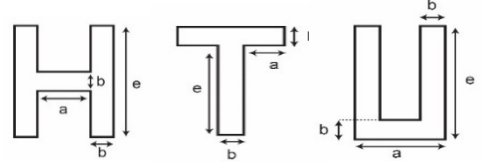


Fig.3. H-, U- and T-Slotted Structures.

A. H-Slotted Structure:

The starting geometrical values of the H-shaped slotted SIW is listed in Table I.

TABLE I. STARTING GEOMETRICAL VALUES OF THE H-SHAPED SLOTTED SIW

a	b	e
2.4mm	0.9mm	5.8mm

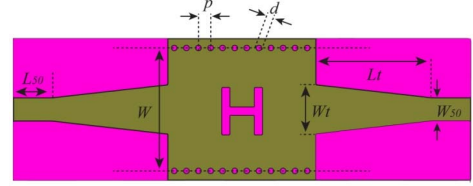


Fig.4. Configuration of H-Slotted SIW

The impact of altering the a , e , and b dimensions are listed in Tables II, III, IV respectively. Our simulation results show that decreasing the a and e parameters increases the FBW, as shown in Figs. 5 and 6. Furthermore, the decrease in the b parameter decreases the FBW, as depicted in Fig. 7.

TABLE II. EFFECT OF THE PARAMETER (A)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
a1 (2.4mm)	[7.38GHz – 17.35GHz]	12.36 GHz	80.66%
a2 (2.2mm)	[7.39GHz – 17.49GHz]	12.44 GHz	81.18%
a3 (2.0mm)	[7.39GHz – 17.77GHz]	12.58 GHz	82.51%

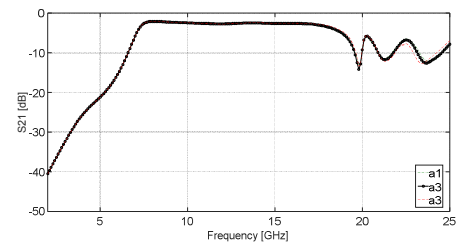


Fig.5. S21 [dB] Simulated results for H-slotted SIW with varied 'a'

TABLE III. EFFECT OF THE PARAMETRE (E)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
e1 (5.8mm)	[7.38GHz – 17.35GHz]	12.36 GHz	80.66%
e2 (4.8mm)	[7.35GHz – 19.30GHz]	13.32 GHz	89.71%
e3 (3.8mm)	[7.31GHz – 19.46GHz]	13.38 GHz	90.80%

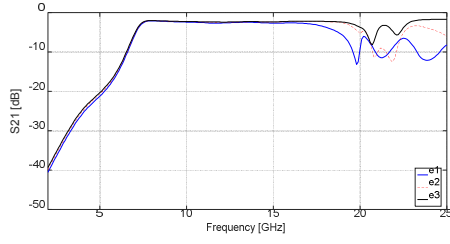


Fig.6. S21 [dB] Simulated results for H-slotted SIW with varied 'e'

TABLE IV. EFFECT OF THE PARAMETRE (B)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
b1 (0.9mm)	[7.35GHz – 17.35GHz]	12.35 GHz	80.97%
b2 (0.8mm)	[7.37GHz – 17.24GHz]	12.30 GHz	80.24%
b3 (0.7mm)	[7.35GHz – 17.00GHz]	12.17 GHz	79.29%

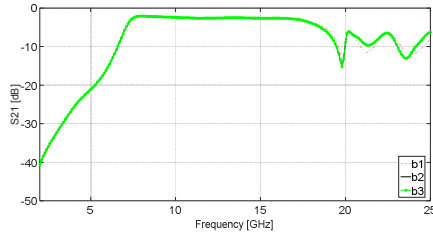


Fig.7. S21 [dB] Simulated results for H-slotted SIW with varied 'b'

B. U-Slotted Structure :

The starting geometrical values of the U-shaped slotted SIW is listed in Table V.

TABLE V. STARTING GEOMETRICAL VALUES OF THE U-SHAPED SLOTTED SIW

a	b	e
2.4mm	0.9mm	5.8mm

The impact of altering the a , e , and b dimensions are listed in Tables VI, VII, VIII respectively. For this slotted shaped structure, decreasing the a and e parameters increases the FBW as shown in Figs. 8 and 9. Furthermore, the decrease in the b parameter decreases the FBW as depicted in Fig. 10.

TABLE VI. EFFECT OF THE PARAMETER (A)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
a1 (2.4mm)	[7.33GHz – 9.60GHz]	8.46 GHz	26.83%
a2 (2.2mm)	[7.35GHz – 9.96GHz]	8.65 GHz	30.17%
a3 (2.0mm)	[7.38GHz – 10.42GHz]	8.9 GHz	34.15%

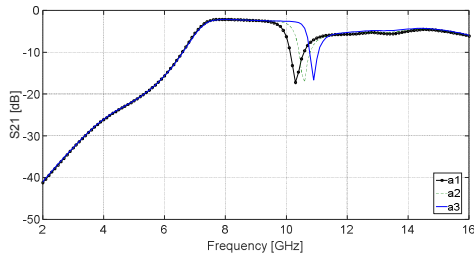


Fig.8. S21 [dB] Simulated results for U-slotted SIW with varied 'a'

TABLE VII. EFFECT OF THE PARAMETRE (E)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
e1 (5.8mm)	[7.33GHz – 9.60GHz]	8.46 GHz	26.83%
e2 (4.8mm)	[7.33GHz – 11.54GHz]	9.43 GHz	44.64%
e3 (3.8mm)	[7.31GHz – 12.93GHz]	10.12 GHz	55.53%

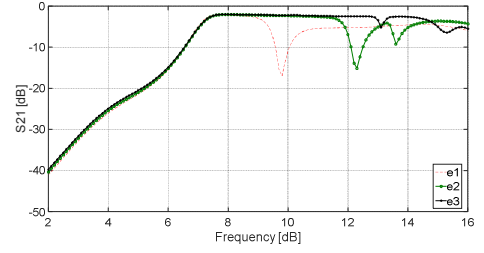


Fig.9. S21 [dB] Simulated results for H-slotted SIW with varied 'e'

TABLE VIII. EFFECT OF THE PARAMETRE (B)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
b1 (0.9mm)	[7.33GHz – 9.60GHz]	8.46 GHz	26.83%
b2 (0.8mm)	[7.29GHz – 9.30GHz]	8.29 GHz	24.24%
b3 (0.7mm)	[7.26GHz – 9.00GHz]	8.13 GHz	21.40%

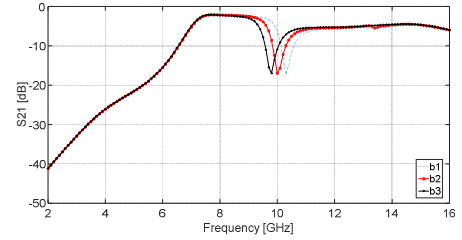


Fig.10. S21 [dB] Simulated results for U-slotted SIW with varied 'b'

C. T-Slotted Structure :

The starting geometrical values of the U-shaped slotted SIW is listed in Table IX.

TABLE IX. STARTING GEOMETRICAL VALUES OF THE T-SHAPED SLOTTED SIW

a	b	e
2.4mm	0.9mm	5.8mm

The impact of altering the a , e , and b dimensions are listed in Tables X, XI, and XII respectively. For the T-shaped slotted, the simulation results shows a different pattern, decreasing a parameter reduce the FBW (Figs.11). In addition, e and b parameters, reduction, increase FBW as shown in Figs. 12 and 13.

TABLE X. EFFECT OF THE PARAMETER (A)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
a1 (2.4mm)	[7.37GHz – 9.51GHz]	8.44 GHz	25.35%
a2 (2.2mm)	[7.37GHz – 9.60GHz]	8.48 GHz	26.29%
a3 (2.0mm)	[7.37GHz – 9.69GHz]	8.53 GHz	27.19%

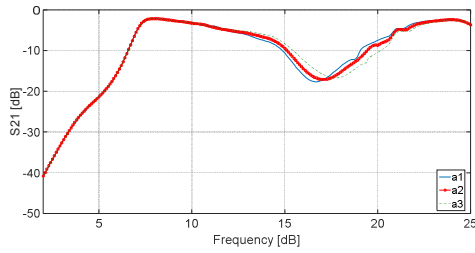


Fig.11. S21 [dB] Simulated results for H-slotted SIW with varied 'a'

TABLE XI. EFFECT OF THE PARAMETRE (E)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
e1 (5.8mm)	[7.36GHz – 9.51GHz]	8.43 GHz	25.50%
e2 (4.8mm)	[7.32GHz – 11.08GHz]	9.2 GHz	40.86%
e3 (3.8mm)	[7.30GHz – 15.93GHz]	11.61 GHz	74.33%

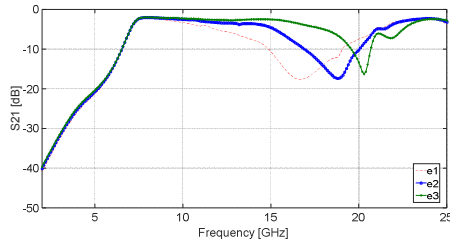


Fig.13. S21 [dB] Simulated results for H-slotted SIW with varied 'e'

TABLE XII. EFFECT OF THE PARAMETRE (B)

Changing Parameter	Frequency Bandwidth	Center Frequency	FBW
b1 (0.9mm)	[7.36GHz – 9.51GHz]	8.43 GHz	25.50%
b2 (0.8mm)	[7.34GHz – 9.49GHz]	8.41 GHz	25.56%
b3 (0.7mm)	[7.33GHz – 9.52GHz]	8.42 GHz	26%

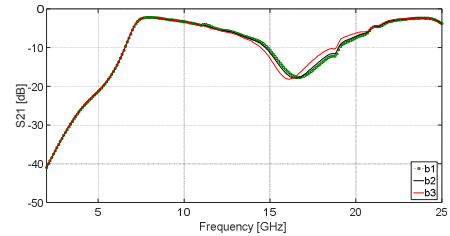


Fig.12. S21 [dB] Simulated results for H-slotted SIW with varied 'b'

CONCLUSION

In this paper, three units EBG cells (H-, U- and T-slotted) etched on a SIW are studied through geometric parametric comparison, aiming to design a Substrate Integrated Waveguide Bandpass Filter (SIW-BPF) for wideband applications. Our work, unequivocally, reveals that H-slotted

EBG has the widest FBW, which is about 90% compared to T- and U- slotted EBG, suggesting the advantage of using H-slotted EBG in the design of wideband SIW-BPF.

REFERENCES

- [1] Wu, K., D. Deslandes, and Y. Cassivi, "The substrate integrated circuits — A new concept for high-frequency electronics and optoelectronics," Proc. 6th Telecommunications in Modern Satellite, Cable and Broadcasting Service, Vol. 1, P-III-P-X, Oct. 2003.
- [2] Yan, L., W. Hong, G. Hua, J. X. Chen, K. Wu, and T. J. Cui, "Simulation and experiment on SIW slot array antennas," IEEE Microw. Wireless Comp. Lett., Vol. 14, No. 9, 446–448, Sep. 2004.
- [3] Yan, L., W. Hong, K. Wu, and T. J. Cui, "Investigations on the propagation characteristics of SIW," Proc. Inst. Elect. Eng Microw., Antennas, Propag., Vol. 152, No. 1, 35–42, Feb. 2005.
- [4] Xu, F., Y. L. Zhang, W. Hong, K. Wu, and T. J. Cui, "Finite difference frequency domain algorithm for modeling guided-wave properties of substrate integrated waveguide," IEEE Trans.Microw. Theory Tech., Vol. 51, No. 11, 2221–2227, Nov. 2003.
- [5] M. Bozzi A. Georgiadis K. Wu "Review of substrate-integrated waveguide circuits and antennas," IET Microw. Antennas Propag., Vol. 5, Iss. 8, pp. 909–920, 2011.
- [6] Kim, T. and C. Seo, "A novel photonic bandgap structure for low-pass filter of wide stopband," IEEE Microwave and Guided Wave Letter, Vol. 10, No. 1, 13–15, 2000.
- [7] Dan Li, Chuangming Tong, Junsong Bao, Peng Peng and Dingwang Yu, "A novel bandpass filter of substrate integrated Waveguide (SIW) based on S-Shaped EBG," Progress In Electromagnetics Research Letters, Vol. 36, 191–200, 2013.
- [8] Rui Sen Chen, Student Member, IEEE, Sai-Wai Wong, Senior Member, IEEE, Lei Zhu, Fellow, IEEE, and Qing-Xin Chu, "Wideband Bandpass Filter Using U-Slotted Substrate Integrated Waveguide (SIW) Cavities," IEEE Microwave and wireless components letters, vol.25, no.1, january 2015.
- [9] Hsu, H. J., M. J. Hill, R. W. Ziolkowski, and J. Papapolymerou, "Aduroid-based planar EBG cavity resonator filter with improved quality factor," IEEE Antennas Wireless Propag. Lett., Vol. 1, 67–70, 2002.
- [10] Simpson, J. J., A. Taflove, J. A. Mix, and H. Heck, "Computational and experimental study of a microwave electromagnetic bandgap structure with waveguiding defect for potential use as a bandpass wireless interconnect," IEEE Microw. Wireless Comp. Lett., Vol. 14, No. 7, 343–345, Jul. 2004.
- [11] Xu and Wu Xu, F and Wu, K,"Guided-wave and leakage characteristics of Substrate Integrated Waveguide", IEEE Transactions On Microwave Theory and Techniques, Vol. 53, No. 1, January 2005
- [12] Bozzi, M., A. Georgiadis, and K. Wu. "Review of substrate-integrated waveguide circuits and antennas," IET Microwaves Antennas & Propagation, 2011.
- [13] Qiang Liu, Yuanan Liu, Yongle Wu, Junyu Shen, Shulan Li, Cuiping Yu, and Ming Su,"A substrate integrated waveguide to substrate Integrated coaxial line transition," Progress In Electromagnetics Research C, Vol. 36, 249–259, 2013.