CORA Cork Open Research Archive
Cartlann Taighde Oscailte Chorcaí

Title	Improving gaseous biofuel production from seaweed Saccharina latissima: the effect of hydrothermal pretreatment on energy efficiency
Authors	Lin, Richen;Deng, Chen;Ding, Lingkan;Bose, Archishman;Murphy, Jerry D.
Publication date	2019-07-08
Original Citation	Lin, R., Deng, C., Ding, L., Bose, A. and Murphy, J. D. (2019) 'Improving gaseous biofuel production from seaweed Saccharina latissima: the effect of hydrothermal pretreatment on energy efficiency', Energy Conversion and Management, 196, pp. 1385-1394. doi: 10.1016/j.enconman.2019.06.044
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://www.sciencedirect.com/science/article/pii/S0196890419307150 - 10.1016/j.enconman.2019.06.044
Rights	© 2019, Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC BY-NC-ND 4.0 license. - https://creativecommons.org/licenses/by-nc-nd/4.0/
Download date	2026-11-02 07:58:44
Item downloaded from	https://hdl.handle.net/10468/8198



UCC
University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Improving gaseous biofuel production from seaweed *Saccharina latissima*: the effect of hydrothermal pretreatment on energy efficiency

Richen Lin[a, b], Chen Deng[a, b*], Lingkan Ding[c], Archishman Bose[a, b], Jerry D. Murphy[a, b]

[a] *MaREI Centre, Environmental Research Institute, University College Cork, Cork, Ireland*

[b] *School of Engineering, University College Cork, Cork, Ireland*

[c] *State Key Laboratory of Clean Energy Utilization, Zhejiang University, Hangzhou 310027, China*

* Corresponding author:

Dr. Chen Deng: MaREI Centre, Environmental Research Institute, University College Cork, Ireland. Tel.: +353 (0)21 490 1948. Email: chen.deng@ucc.ie

Supplementary Material

The supporting information contains 1 figure as referred to in the main manuscript:

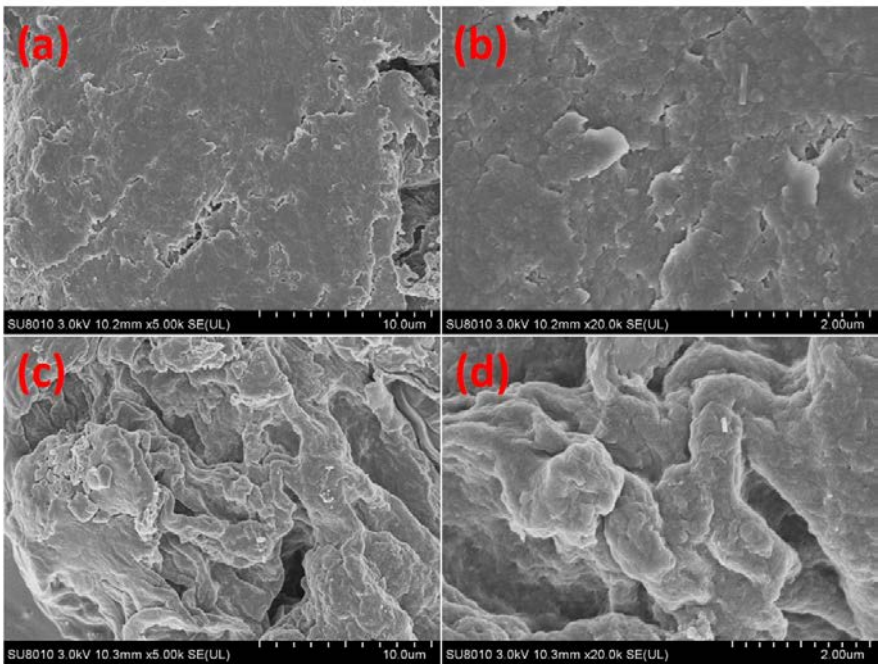


Fig. S1. SEM micrographs of *Saccharina latissima* before and after hydrothermal pretreatment: (a) raw biomass ×5k; (b) raw biomass ×20k; (c) pretreated biomass at 140 °C ×5k; and (d) pretreated biomass at 140 °C ×20k.