

Title	Efficient spatial compliance analysis of general initially curved beams for mechanism synthesis and optimization
Authors	Wu, Ke;Zheng, Gang;Hao, Guangbo
Publication date	2021-04-09
Original Citation	Wu, K., Zheng, G. and Hao, G. (2021) 'Efficient spatial compliance analysis of general initially curved beams for mechanism synthesis and optimization', Mechanism and Machine Theory, 162, 104343 (22pp). doi: 10.1016/j.mechmachtheory.2021.104343
Type of publication	Article (peer-reviewed)
Link to publisher's version	10.1016/j.mechmachtheory.2021.104343
Rights	© 2021, Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC BY-NC-ND 4.0 license. - https://creativecommons.org/licenses/by-nc-nd/4.0/
Download date	2026-08-10 19:58:07
Item downloaded from	https://hdl.handle.net/10468/11248

1 **Title:**

2 Efficient Spatial Compliance Analysis of General Initially Curved Beams for Mechanism Synthesis and Optimization

3 **Authors and Affiliations:**

4 Ke Wu¹, Gang Zheng¹, and Guangbo Hao²

5 ¹INRIA Lille-Nord Europe, 40 Avenue Halley, 59650, Villeneuve d'Ascq, France

6 ²School of Engineering and Architecture -Electrical and Electronic Engineering, University College Cork, Cork, Ireland,

7 **Correspondence:**

8 Email: gang.zheng@inria.fr

9 **Document information:**

10 Compiled: March 30, 2021

11 Figures in main text: 17

12 Tables in main text: 8

13 References: 63

¹⁴ **Significance Statement**

- ¹⁵ 1. We proposed an efficient compliance analysis method of initially curved beams
- ¹⁶ 2. We validated the method using Finite Element Analysis
- ¹⁷ 3. We conducted compliance analysis and optimization of ICB-based mechanisms
- ¹⁸ 4. We used weighted-sum method and genetic algorithm for the optimization process

19 Abstract

20 Compliant Mechanisms (CMs) present several desired properties for mechanical designs. Conventional rigid-body mechanisms composed
21 of rigid links connected at kinematic joints, serve as devices to transfer motion, force and energy by the movements of rigid links whereas
22 CMs are able to present the same function only through deflection of flexible members. Most designs of CMs in the current literature employ
23 straight beams as the elementary flexible members whereas initially curved beams (ICBs) also provide potential advantages for CMs such as
24 large range of motion and small strain range. This paper presents an efficient spatial compliance analysis method of general ICBs. The spatial
25 compliance analysis of different types of ICBs (such as varying-curvature beams and varying-cross-section beams) was conducted, followed by
26 Finite Element Analysis (FEA) verification. Next, the modeling and optimization of two types of CMs including ICB-based parallelogram
27 mechanisms and ICB-based Ortho-planar springs were carried out by applying screw theory under the framework of position space concept
28 and parameter normalization strategy where a class of anti-buckling translational parallelograms with high load-bearing capacity and a type of
29 compact 2R1T (2 rotational DOF and 1 translational DOF) compliant kinematic joints were obtained. The corresponding FEA was conducted
30 to verify the optimal results.

31
32 *Keywords:* Compliant Mechanisms; Initially Curved Beams (ICBs); Compliance Analysis; Optimization; ICB-based Parallelogram; Ortho-
33 planar spring;

1. Introduction

As a promising alternative of designing mechanical systems, Compliant Mechanisms (CMs) provide several great solutions for many existing mechanical applications and have become a research hot spot over the last few decades (1). Conventional mechanisms composed of rigid links attached at kinematic pairs, serve as devices to transfer motion, force and energy by the translational and angular movements of a group of physically interrelated rigid links while CMs are able to do the same only counting on the deformation of flexible members (1)(2). CMs have already demonstrated many meaningful advantages over conventional rigid-body mechanisms, including increased motion precision (3)(4)(5)(6)(7)(8)(9), simplified manufacturing process (1)(2)(3), reduced weight (1)(2), cost reduction (1)(2)(3) and less maintenance (1)(2). Owing to the mentioned merits, many great designs that employ CMs have been proposed for a wide variety of practical applications, such as compliant kinematic joints (10)(11)(12)(13), positioning motion stage (4)(5)(8)(9)(14)(15), actuators (16)(17)(18)(19) and sensors (19)(20). However, most of the mentioned studies above only employ straight beams as the elementary flexible members, and straight beams have been intensively studied in terms of spatial compliance synthesis of CMs (21).

Initially curved beams (ICBs) have also demonstrated their potential advantages. Some decent applications integrating ICBs have been reported in the literature: the contributors of (22) proposed an optimization-based systematic synthesis for path-generating CMs using ICBs, in which ICBs display diverse mechanical properties; ICBs are also a good alternative that can be integrated for designing bi-stable or multi-stable CMs (23)(24)(25)(26)(27); due to its relatively large deflection range and relatively small strain range, ICBs have been used as the elementary flexible members to design compliant kinematic joints and positioning stage for transferring displacements and forces (28)(29)(30)(31)(32)(33)(34), and these properties are also desired in civil, aerospace and electronic engineering respectively (35)(36)(37).

Although ICBs are commonly employed in CMs, the studies on characterizing and analyzing such beams are rather limited: Pseudo-rigid-body (PRB) assumptions are a popular option to analyze large deformation of curved beams (27)(38)(39)(40); (41) developed a generalized Beam Constraint Model (BCM) for modeling 2-D ICBs within intermediate deflection range, based on which (42) presented Chained Beam Constraint Model (CBCM) for modeling large deflection of curved beams; (37) used a direct integration method to characterize stiffness matrices of general spatial/planar curved beams, serving as quite a universal method of obtaining compliance matrix of any type of curved beams; using the same method as (37), (30)(31)(32) conducted spatial compliance analysis of circularly curved beams whereas they did not consider curvature-varying curved beams and cross-section-varying beams. The above mentioned methods have all presented their effectiveness in modeling ICBs but they also have limitations in terms of different modeling purposes: the superiority of PRB models is transforming compliant mechanisms into equivalent rigid-body mechanisms, which facilitates the use of the wealth of existing rigid-body mechanics knowledge for the solution of compliant mechanisms (43), whereas its limited accuracy in some cases comes from its 'pseudo' modeling nature. (27)(38)(39)(40)(41)(42) focus on 2-D load-displacement relationship so that they are not able to capture out-of-plane deflection of curved beams; (41)(42) mainly concentrate on nonlinear or large-deflection modeling by numerical solutions, which is not suitable for linear compliance analysis through developing explicit analytical formulas. Although the authors of (37) provide a method of conducting spatial linear compliance analysis of ICBs under integration scheme, in this paper we would like to propose a more easy-to-follow and efficient method of analyzing spatial compliance of general ICBs from an energy-based point of view (Maxwell–Mohr Method).

This paper is mainly composed of two parts: we first recall the definition of general planar curves (in polar coordinate system) and spatial compliance matrix of flexible members, and then derive compliance matrix of general ICBs using Maxwell–Mohr Method under the combined framework of the polar coordinate system and Cartesian coordinate system, followed by FEA verification where three representative beams (a Archimedean-spiral curved beam with a constant square cross-section, a circular curved beam with a constant round cross-section and a circular curved beam with a uniformly varying rectangular cross-section) are studied. In terms of the second part of the paper, we then conduct compliance synthesis and geometric optimization of ICB-based parallelogram and ICB-based Ortho-planar spring where based on position space concept (4) and weighted-sum method (44), we improve the mechanical performance of the studied mechanisms, effectively dealing with multi-objectives and multi-variables, where a class of anti-buckling translational parallelograms with high load-bearing capacity and a type of compact 2R1T (2 rotational DOF and 1 translational DOF) compliant kinematic joints are obtained. The optimal results are also verified by FEA. For manufacturing feasibility and engineering purposes, planar ICBs are considered in this paper but the method is not limited to planar beams and can be applied to spatial ICBs as well.

2. Geometric Definition of General Initially Curved Beams

In this section, we aim to geometrically define general ICBs through introducing the polar coordinate system. As demonstrated in (45), it's a two-dimensional coordinate system where every point on the plane is determined by a distance from the pole O (radial coordinate r) and an angle from the polar axis $\vec{OA}$ (angular coordinate θ) displayed in Fig. 1 where an arbitrary point, such as point B, can be defined by r and θ . Logically, an arbitrary curve can be defined by a function of θ in the polar coordinate system (Fig. 1):

$$r = r(\theta), \theta \in [0, \theta_o] \quad [1]$$

Therefore, (1) can be used to define the axis of a general ICB.

3. Compliance Matrix of General Initially Curved Beams

In this section, we mainly focus on deriving free-end spatial compliance matrices of general ICBs using Maxwell–Mohr Method under the combined framework of the polar coordinate system and Cartesian coordinate system.

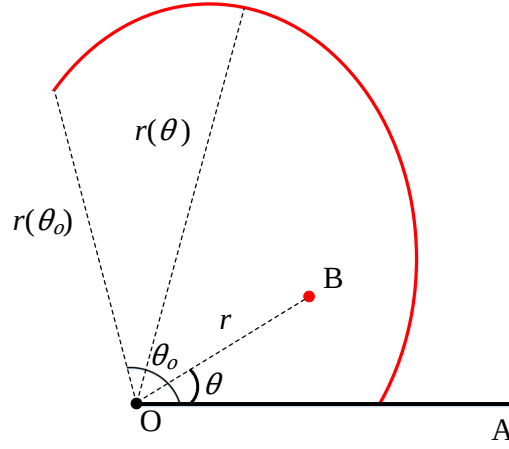


Fig. 1. Polar coordinate system for defining points and curves

A. Formation of Compliance Matrix. For an arbitrary ICB (Fig. 2), F_x, F_y, F_z, M_x, M_y and M_z stand for the actual loads exerted at the free-end center, resulting in translational and angular displacements. F_x, F_y and F_z are the forces along X, Y and Z axes respectively of its local coordinate system. Similarly, M_x, M_y and M_z denote the bending moments with respect to X, Y and Z axes respectively. x, y and z are the translational displacements of the free-end center along X, Y and Z axes respectively. Similar to straight

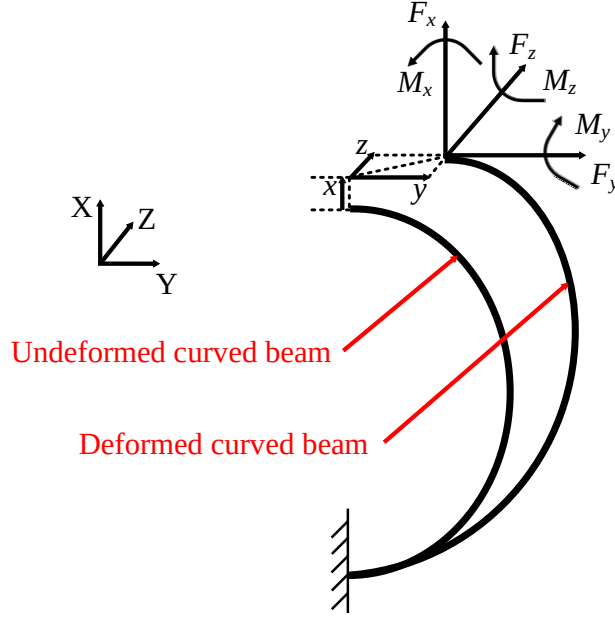


Fig. 2. Spatial deformation of an initial curved beam

beams, the classic form of free-end spatial compliance matrix $C_S \in \mathbb{R}^{6 \times 6}$ of a curved flexible member is demonstrated in Eq. 2:

$$C_S = \begin{bmatrix} c_{s11} & c_{s12} & c_{s13} & c_{s14} & c_{s15} & c_{s16} \\ c_{s21} & c_{s22} & c_{s23} & c_{s24} & c_{s25} & c_{s26} \\ c_{s31} & c_{s32} & c_{s33} & c_{s34} & c_{s35} & c_{s36} \\ c_{s41} & c_{s42} & c_{s43} & c_{s44} & c_{s45} & c_{s46} \\ c_{s51} & c_{s52} & c_{s53} & c_{s54} & c_{s55} & c_{s56} \\ c_{s61} & c_{s62} & c_{s63} & c_{s64} & c_{s65} & c_{s66} \end{bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial F_x} & \frac{\partial x}{\partial F_y} & \frac{\partial x}{\partial F_z} & \frac{\partial x}{\partial M_x} & \frac{\partial x}{\partial M_y} & \frac{\partial x}{\partial M_z} \\ \frac{\partial y}{\partial F_x} & \frac{\partial y}{\partial F_y} & \frac{\partial y}{\partial F_z} & \frac{\partial y}{\partial M_x} & \frac{\partial y}{\partial M_y} & \frac{\partial y}{\partial M_z} \\ \frac{\partial z}{\partial F_x} & \frac{\partial z}{\partial F_y} & \frac{\partial z}{\partial F_z} & \frac{\partial z}{\partial M_x} & \frac{\partial z}{\partial M_y} & \frac{\partial z}{\partial M_z} \\ \frac{\partial \theta_x}{\partial F_x} & \frac{\partial \theta_x}{\partial F_y} & \frac{\partial \theta_x}{\partial F_z} & \frac{\partial \theta_x}{\partial M_x} & \frac{\partial \theta_x}{\partial M_y} & \frac{\partial \theta_x}{\partial M_z} \\ \frac{\partial \theta_y}{\partial F_x} & \frac{\partial \theta_y}{\partial F_y} & \frac{\partial \theta_y}{\partial F_z} & \frac{\partial \theta_y}{\partial M_x} & \frac{\partial \theta_y}{\partial M_y} & \frac{\partial \theta_y}{\partial M_z} \\ \frac{\partial \theta_z}{\partial F_x} & \frac{\partial \theta_z}{\partial F_y} & \frac{\partial \theta_z}{\partial F_z} & \frac{\partial \theta_z}{\partial M_x} & \frac{\partial \theta_z}{\partial M_y} & \frac{\partial \theta_z}{\partial M_z} \end{bmatrix} \quad [2]$$

which is essentially a Jacobian matrix explaining the force-displacement relationship in small deformations in Eq. 3:

$$D = C_S F \quad [3]$$

where $F \in \mathbb{R}^{6 \times 1}$ denotes the force vector exerted at the beam tip and $D \in \mathbb{R}^{6 \times 1}$ stands for the free-end displacement vector in Eq. 4:

$$D = [x \ y \ z \ \theta_x \ \theta_y \ \theta_z]^T, F = [F_x \ F_y \ F_z \ M_x \ M_y \ M_z]^T \quad [4]$$

B. Derivation of Compliance Matrix. Unlike the free-end compliance of straight beams (21), ICBs display more diverse mechanical properties (22), which is therefore more difficult to be spatially modeled. Maxwell–Mohr Method is introduced and recalled here to derive all elements in C_S since it's a universal method for computing displacements at any point of any flexible member. Besides, Maxwell–Mohr method also allows calculating mutual displacements, and its general mathematical expression is written in Eq. 5:

$$\Delta_{kp} = \sum \int_0^s \frac{M_p \cdot \bar{m}_k}{EI_m} ds + \sum \int_0^s \frac{F_p \cdot \bar{f}_k}{EA} ds + \sum \int_0^s \frac{T_p \cdot \bar{t}_k}{GI_p} ds \quad [5]$$

which implies that displacements caused by any combination of loads can be expressed utilizing internal forces developed by given loads and unit load (which corresponds to required displacement). All symbols in (Eq. 5) are explained as follows: Δ_{kp} denotes the displacement of a flexible member in the k direction under p condition (p -direction loading); M_p , F_p and T_p are the internal forces (bending moment, force and torque) due to the given bending moment, axial force and torque respectively; $\bar{m}_k$, $\bar{f}_k$ and $\bar{t}_k$ are the internal bending moment, axial force and torque respectively of an arbitrary section of the given flexible member under a unit load; E and G denote the Young's modulus and the shear modulus of the material respectively; A is the cross-section area of the given flexible member; I_m and I_p denote the second moment of the area of the cross section and polar moment of inertia of the cross section respectively.

Based on the recalling above, we would like to conduct spatial compliance analysis of general ICBs. The general loading conditions of a flexible curved member (the red curve: $r = r(\theta)$, $\theta \in [0, \theta_o]$) for compliance analysis of X-Y plane are graphically displayed in Fig. 3 depending on the combined structure of the polar coordinate system and Cartesian coordinate system, which is utilized to assist in deriving its spatial compliance matrix C_S . As demonstrated in Fig. 3, F_x , F_y , F_z , M_x , M_y and M_z denote the actual loads exerted at the free end of the curved beam; $\bar{f}_x$, $\bar{f}_y$, $\bar{f}_z$, $\bar{m}_x$, $\bar{m}_y$ and $\bar{m}_z$ are the internal forces due to the unit loads in the corresponding directions; d_x is the force arm of F_x and $\bar{f}_x$ with respect to ds and similarly d_y is the force arm of F_y and $\bar{f}_y$ with respect to ds where d_x and d_y are functions of $r(\theta)$ and θ developed in Cartesian coordinate system (Eq. 6):

$$\begin{aligned} d_x &= [0 \quad r(\theta) \sin(\theta) - r(\theta_o) \sin(\theta_o) \quad 0]^T \\ d_y &= [r(\theta) \cos(\theta) - r(\theta_o) \cos(\theta_o) \quad 0 \quad 0]^T \end{aligned} \quad [6]$$

$\hat{u}_t$ is the unit tangent vector at ds pointing to the growth direction of the curve and $\hat{u}_n$ is the inward-pointing unit normal vector at ds (see Fig. 3 and Fig. 4) where $\hat{u}_t$ and $\hat{u}_n$ are functions of $r(\theta)$ and θ developed in Cartesian coordinate system as well (Eq. 7):

$$\begin{aligned} \hat{u}_t &= \frac{\left[\frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) \quad \frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) \quad 0 \right]^T}{\left\| \left[\frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) \quad \frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) \quad 0 \right] \right\|} \\ \hat{u}_n &= \frac{\left[\frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) \quad -\left(\frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) \right) \quad 0 \right]^T}{\left\| \left[\frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) \quad -\left(\frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) \right) \quad 0 \right] \right\|} \end{aligned} \quad [7]$$

B is an arbitrary point on the curve and C is the beam tip; the lengths of $\overline{OB}$ and $\overline{OC}$ can be represented by $r(\theta)$ and $r(\theta_o)$ respectively where point O is the origin of the polar coordinate system and Cartesian coordinate system; ds can be expressed by $r(\theta)$ and θ (Eq. 8):

$$ds = \sqrt{r(\theta)^2 + \left(\frac{dr(\theta)}{d\theta} \right)^2} d\theta \quad [8]$$

Therefore, we have:

$$c_{s11} = \int_0^{\theta_o} \frac{(F_x \times d_x) \cdot (\bar{f}_x \times d_x)}{|F_x| |\bar{f}_x| EI_{mz}} ds + \int_0^{\theta_o} \frac{[(F_x \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{f}_x \cdot \hat{u}_t) \hat{u}_t]}{|F_x| |\bar{f}_x| EA} ds \quad [9]$$

$$c_{s21} = c_{s12} = \int_0^{\theta_o} \frac{(F_x \times d_x) \cdot (\bar{f}_y \times d_y)}{|F_x| |\bar{f}_y| EI_{mz}} ds + \int_0^{\theta_o} \frac{[(F_x \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{f}_y \cdot \hat{u}_t) \hat{u}_t]}{|F_x| |\bar{f}_y| EA} ds \quad [10]$$

$$c_{s61} = c_{s16} = \int_0^{\theta_o} \frac{(F_x \times d_x) \cdot (\bar{m}_z)}{|F_x| |\bar{m}_z| EI_{mz}} ds \quad [11]$$

$$c_{s22} = \int_0^{\theta_o} \frac{(F_y \times d_y) \cdot (\bar{f}_y \times d_y)}{|F_y| |\bar{f}_y| EI_{mz}} ds + \int_0^{\theta_o} \frac{[(F_y \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{f}_y \cdot \hat{u}_t) \hat{u}_t]}{|F_y| |\bar{f}_y| EA} ds \quad [12]$$

$$c_{s62} = c_{s26} = \int_0^{\theta_o} \frac{(F_y \times d_y) \cdot (\bar{m}_z)}{|F_y| |\bar{m}_z| EI_{mz}} ds \quad [13]$$

$$c_{s66} = \int_0^{\theta_o} \frac{M_z \cdot (\bar{m}_z)}{|M_z| |\bar{m}_z| EI_{mz}} ds \quad [14]$$

The above Eq. 9 to 14 define the 9 elements in the compliance matrix C_S which represent the compliance of X-Y plane deformation where I_{mz} is the second moment of the area of the cross section with respect to Z axis (see Fig. 4).

The following focuses on compliance of out-of-plane deformation displayed in Fig. 4: $\overline{CM}$ is constructed to be perpendicular to $\overleftrightarrow{BM}$ (which is the tangent line to the curve at point B) intersecting at point M; d_{zn} is the normal force arm of F_z and $\bar{f}_z$ with respect to point B, and

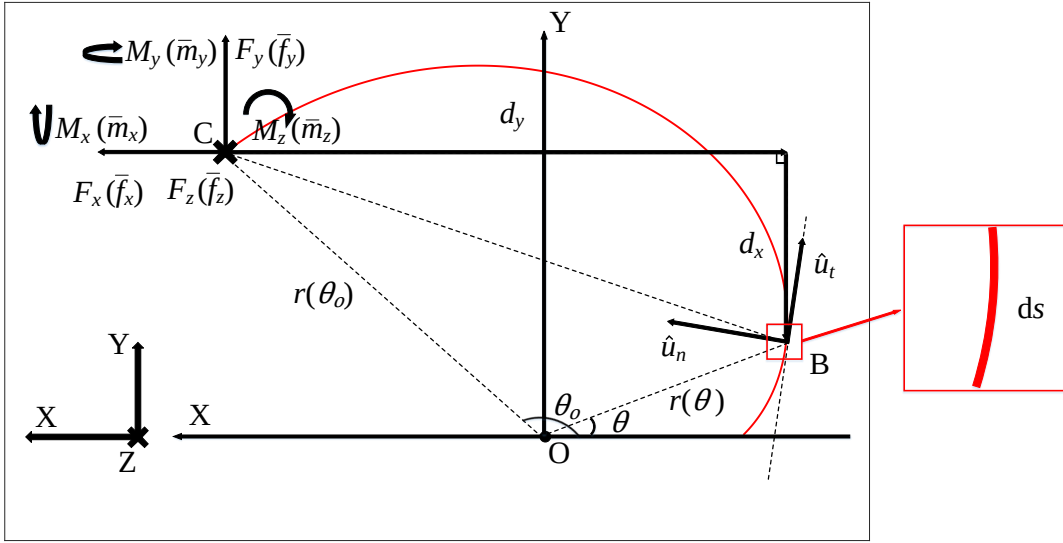


Fig. 3. Loading conditions of an ICB for compliance analysis in X-Y plane

its direction is from point C to point M; d_{zt} is the tangent force arm of F_z and $\bar{f}_z$ with respect to point B, and its direction is from point M to point B; d_{zn} and d_{zt} are also functions of $r(\theta)$ and θ developed in Cartesian coordinate system (Eq. 15):

$$\begin{bmatrix} X_M(\theta) \\ Y_M(\theta) \end{bmatrix} = \begin{bmatrix} \frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) & 1 \\ \frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) & 1 \end{bmatrix}^{-1} \begin{bmatrix} r(\theta_o) \sin(\theta_o) + \frac{dr(\theta)}{d\theta} \cos(\theta) - r(\theta) \sin(\theta) r(\theta_o) \cos(\theta_o) \\ r(\theta) \sin(\theta) - \frac{dr(\theta)}{d\theta} \sin(\theta) + r(\theta) \cos(\theta) r(\theta) \cos(\theta) \end{bmatrix} \quad [15]$$

$$d_{zt} = [r(\theta) \cos(\theta) - X_M(\theta) \quad r(\theta) \sin(\theta) - Y_M(\theta) \quad 0]^T$$

$$d_{nt} = [X_M(\theta) - r(\theta_o) \cos(\theta_o) \quad Y_M(\theta) - r(\theta_o) \sin(\theta_o) \quad 0]^T$$

where $X_M(\theta)$ and $Y_M(\theta)$ are the Cartesian coordinates of point M.

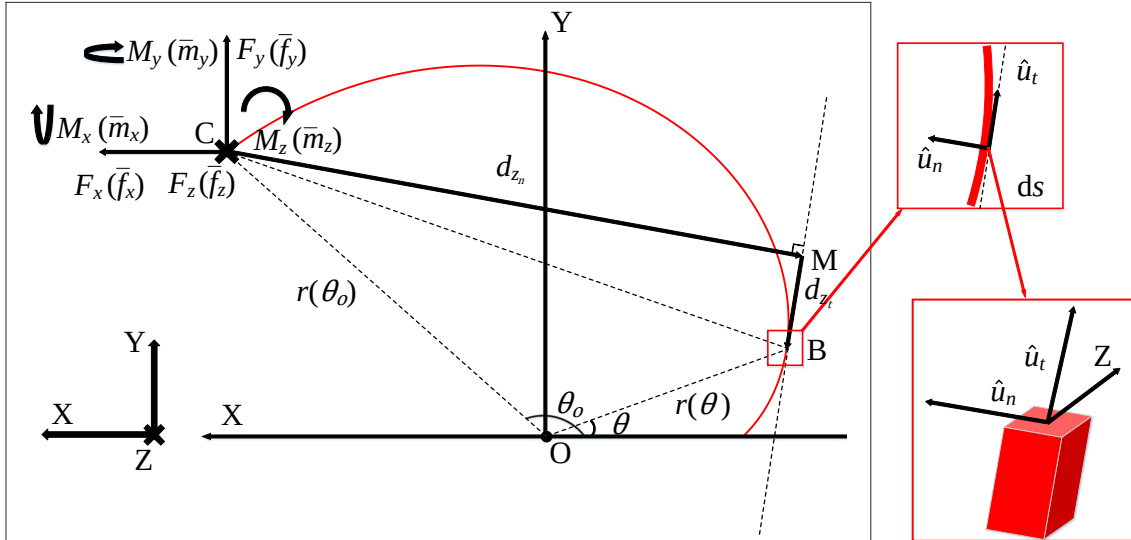


Fig. 4. Loading conditions of an ICB for out-of-plane compliance analysis

$$c_{s33} = \int_0^{\theta_o} \frac{(F_z \times d_{zt}) \cdot (\bar{f}_z \times d_{zt})}{EI_{m_{\hat{u}_n}} |F_z| |\bar{f}_z|} ds + \int_0^{\theta_o} \frac{(F_z \times d_{zn}) \cdot (\bar{f}_z \times d_{zn})}{GI_p |F_z| |\bar{f}_z|} ds \quad [16]$$

$$c_{s43} = c_{s34} = \int_0^{\theta_o} \frac{(F_z \times d_{zt}) \cdot \bar{m}_x}{EI_{m_{\hat{u}_n}} |F_z| |\bar{m}_x|} ds + \int_0^{\theta_o} \frac{(F_z \times d_{zn}) \cdot \bar{m}_x}{GI_p |F_z| |\bar{m}_x|} ds \quad [17]$$

$$c_{s53} = c_{s35} = \int_0^{\theta_o} \frac{(F_z \times d_{z_t}) \cdot \bar{m}_y}{EI_{m_{\hat{u}_n}} |F_z| |\bar{m}_y|} ds + \int_0^{\theta_o} \frac{(F_z \times d_{z_n}) \cdot \bar{m}_y}{GI_p |F_z| |\bar{m}_y|} ds \quad [18]$$

$$c_{s44} = \int_0^{\theta_o} \frac{[(M_x \cdot \hat{u}_n) \hat{u}_n] \cdot [(\bar{m}_x \cdot \hat{u}_n) \hat{u}_n]}{EI_{m_{\hat{u}_n}} |M_x| |\bar{m}_x|} ds + \int_0^{\theta_o} \frac{[(M_x \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{m}_x \cdot \hat{u}_t) \hat{u}_t]}{GI_p |M_x| |\bar{m}_x|} ds \quad [19]$$

$$c_{s54} = c_{s45} = \int_0^{\theta_o} \frac{[(M_x \cdot \hat{u}_n) \hat{u}_n] \cdot [(\bar{m}_y \cdot \hat{u}_n) \hat{u}_n]}{EI_{m_{\hat{u}_n}} |M_x| |\bar{m}_y|} ds + \int_0^{\theta_o} \frac{[(M_x \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{m}_y \cdot \hat{u}_t) \hat{u}_t]}{GI_p |M_x| |\bar{m}_y|} ds \quad [20]$$

$$c_{s55} = \int_0^{\theta_o} \frac{[(M_y \cdot \hat{u}_n) \hat{u}_n] \cdot [(\bar{m}_y \cdot \hat{u}_n) \hat{u}_n]}{EI_{m_{\hat{u}_n}} |M_y| |\bar{m}_y|} ds + \int_0^{\theta_o} \frac{[(M_y \cdot \hat{u}_t) \hat{u}_t] \cdot [(\bar{m}_y \cdot \hat{u}_t) \hat{u}_t]}{GI_p |M_y| |\bar{m}_y|} ds \quad [21]$$

Eq. 16 to Eq. 21 are used to define the 9 elements that denote the compliance of out-of-plane deformation where $I_{m_{\hat{u}_n}}$ denotes the second moment of the area of the cross section with respect to its corresponding unit normal vector $\hat{u}_n$ (see Fig. 4). The values of the rest elements using Eq. 5 are obtained in Eq. 22:

$$c_{s31} = c_{s41} = c_{s51} = c_{s32} = c_{s42} = c_{s52} = c_{s13} = c_{s23} = c_{s63} = c_{s14} = c_{s24} = c_{s64} = c_{s15} = c_{s25} = c_{s65} \\ = c_{s36} = c_{s46} = c_{s56} = 0 \quad [22]$$

Therefore, by employing Eq. 1 and Eq. 6 to 22, the free-end compliance matrix C_S of any ICB can be obtained efficiently. In particular, straight beams can be regarded as a type of special ICBs with their curvature being 0 from its base to tip, the proposed method is logically applicable to straight beams as well.

C. Validation by Finite Element Analysis. In this section, we focus on verifying the proposed method in several different cases. In terms of the beam axis, Archimedean-spiral-curved beams and circular-curved beams are studied; regarding the shape of the cross-section, square, rectangular, round cross-sections and varying cross-section are analyzed in the following. In the end, the FEA results are presented to verify the analytical results.

C.1. Geometric Definition of an Archimedean-spiral curved beam and a circular curved beam. First, we need to geometrically define an Archimedean-spiral curved beam and a circular curved beam. The mathematical expression of Archimedean spirals in the polar coordinate system is written in Eq. 23:

$$r(\theta) = a + b\theta \quad [23]$$

where a and b are constant real numbers. a defines the distance between the centerpoint of the spiral and the origin while b controls the

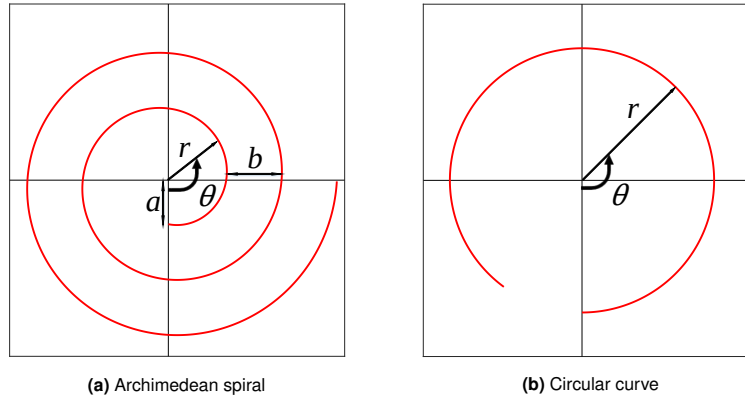


Fig. 5. Selected curves

distance between loops and equivalently the growth rate of r shown in Fig. 5a. An Archimedean spiral is displayed in Fig. 5a, and it can be transformed to a circular curve displayed in Fig. 5b if $b = 0$. The curvature K of Archimedean spirals can be defined (45):

$$K(\theta) = \left| \frac{2\left(\frac{dr}{d\theta}\right)^2 + r^2 - r\frac{d^2r}{d\theta^2}}{\left(r^2 + \left(\frac{dr}{d\theta}\right)^2\right)^{\frac{3}{2}}} \right| = \left| \frac{2b^2 + (a + b\theta)^2}{[(a + b\theta)^2 + b^2]^{\frac{3}{2}}} \right|$$

where K varies as θ changes. Logically, K can be simplified to a constant when it comes to circular curves ($b = 0$):

$$K = \frac{1}{a}$$

Therefore, an Archimedean-spiral curved beam (Fig. 6a) and a circular curved beam (Fig. 6c) are chosen to be studied as the representatives of varying-curvature curved beams and constant-curvature curved beams respectively. Their corresponding geometric expressions are noted in Eqs. 24 and 25:

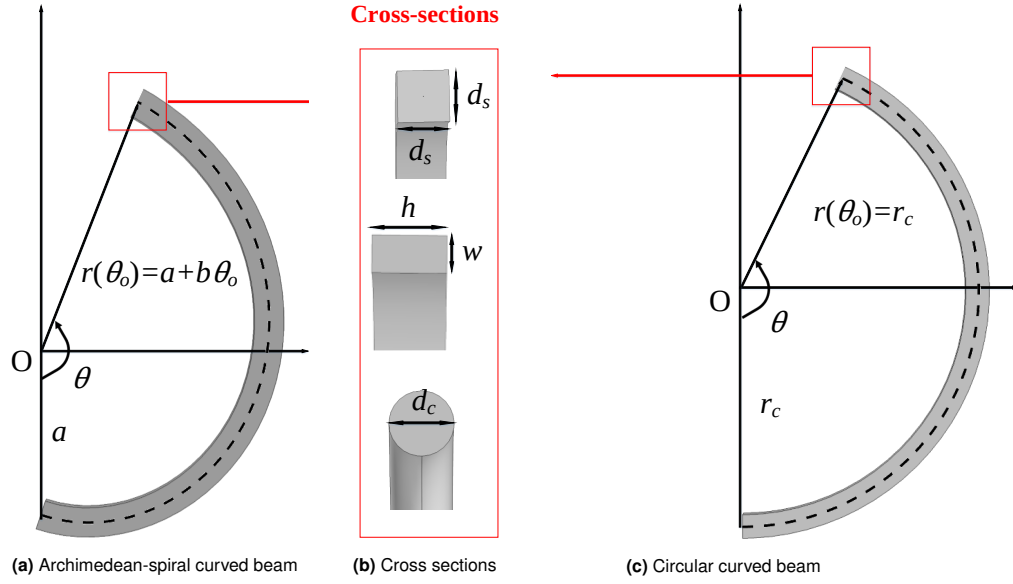


Fig. 6. Geometric definition of curved beams

Archimedean-spiral curved beam:

$$r(\theta) = a + b\theta, \theta \in [0, \theta_o] \quad [24]$$

Circular curved beam:

$$r(\theta) = r_c, \theta \in [0, \theta_o] \quad [25]$$

where the length unit and angular unit are m and rad respectively. The shape of the cross-section could be designed as the following three: square (with side length d_s), rectangular (with out-of-plane depth h and in-plane width w) and round (with diameter d_c) shown in Fig. 6b.

Apart from constant-cross-section beams like the ones in Fig. 6, the proposed method can also be used for analyzing varying-cross-section beams. As illustrated in Fig. 7, a circular varying-cross-section beam is defined: r_c is the radius of the circle; $h^*(\theta)$ and $w^*(\theta)$ are the varying cross-section parameters, which are dependent on θ . For verification purposes, an Archimedean-spiral curved beam with a constant square

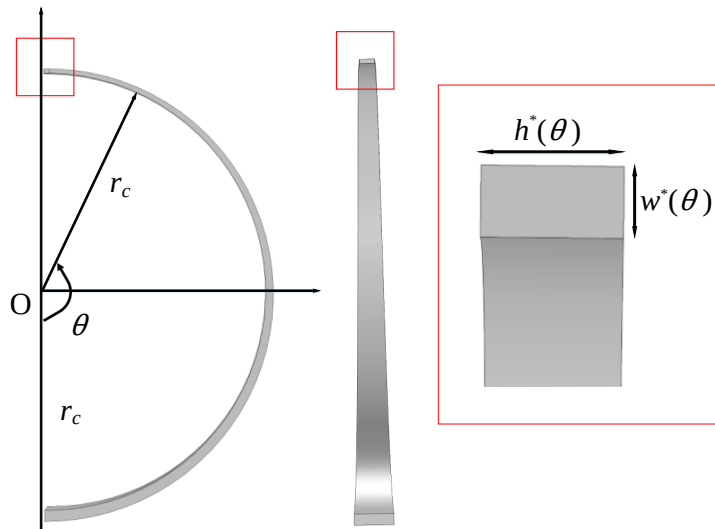


Fig. 7. Geometric definition of varying-cross-section circular beams

cross-section, a circular curved beam with a constant round cross-section and a circular curved beam with a uniformly varying rectangular

cross-section are chosen here with the dominant geometric parameters of the three studied beams assigned in (26)(27)(28):

The studied Archimedean-spiral curved beam with a constant square cross-section:

$$a = 0.030 \text{ m}$$

$$b = 0.010 \text{ m}$$

$$\theta_o = \pi$$

$$d_s = 0.006 \text{ m}$$

$$I_{m_z} = I_{m_{\hat{u}_n}} = \frac{d_s^4}{12} = 1.08 \times 10^{-10} \text{ m}^4$$

$$I_p = d_s^4 \left(\frac{1}{3} - 0.21 \frac{d_s}{d_s} \left(1 - \frac{d_s^4}{12d_s^4} \right) \right) = 1.83 \times 10^{-10} \text{ m}^4$$

The studied circular curved beam with a constant round cross-section:

$$r_c = 0.040 \text{ m}$$

$$\theta_o = 0.75\pi$$

$$d_c = 0.006 \text{ m}$$

$$I_{m_z} = I_{m_{\hat{u}_n}} = \frac{\pi d_c^4}{64} = 6.36 \times 10^{-11} \text{ m}^4$$

$$I_p = \frac{\pi d_c^4}{32} = 1.27 \times 10^{-10} \text{ m}^4$$

The studied circular curved beam with a uniformly varying rectangular cross-section:

$$r_c = 0.040 \text{ m}$$

$$\theta_o = 0.5\pi$$

$$h^*(\theta) = 0.007 \cdot (1 - 5r\theta) \text{ m}$$

$$w^*(\theta) = 0.002 \cdot (1 - 5r\theta) \text{ m}$$

$$I_{m_z} = \frac{h^*(\theta)w^*(\theta)^3}{12} \text{ m}^4$$

$$I_{m_{\hat{u}_n}} = \frac{h^*(\theta)^3w^*(\theta)}{12} \text{ m}^4$$

$$I_p = h^*(\theta)w^*(\theta)^3 \left(\frac{1}{3} - 0.21 \frac{w^*(\theta)}{h^*(\theta)} \left(1 - \frac{w^*(\theta)^4}{12h^*(\theta)^4} \right) \right) \text{ m}^4$$

It should be noticed that in (26)(28), the polar moment of inertia of the rectangular cross-section can be approximately described as Eq. 29 if $h \geq w$ (46)(47):

$$I_p = hw^3 \left(\frac{1}{3} - 0.21 \frac{w}{h} \left(1 - \frac{w^4}{12h^4} \right) \right)$$

C.2. Finite Element Analysis Compared with Analytical Results. To validate the analytical compliance matrices of three beams defined in (26), (27) and (28), three FEA models are built in COMSOL. Swept triangular meshes and swept mapped meshes are used with the maximum and minimal mesh sizes being 0.02 mm and 2 mm respectively shown in Fig.8. The relative tolerance of the convergence error is set as 0.001 by default. The material used is isotropic structural steel with Young's modulus $E = 200 \times 10^9 \text{ Pa}$ and Poisson's ratio $\nu = 0.3$. Logically, the shear modulus G is calculated by $G = \frac{E}{2(1+\nu)} = 7.7 \times 10^{10} \text{ Pa}$. We compare the compliance results between the analytical models and the FEA models of the mentioned three curved beams with regard to reference point (the free end) where the boundary conditions set up in FEA are demonstrated in Fig. 8. As the studied compliance matrices only capture the properties of small deformation without considering material non-linearity and geometric non-linearity, the same conditions are set up in FEA as well. The results are displayed in Table. 1, 2 and 3 where the maximum error is below 3% (the error ER is defined as $\frac{|FEA-AM|}{FEA} \times 100\%$). In terms of total computational cost, the efficiency of AM dramatically improve compared to FEA (see the corresponding computational time in Table. 1, 2 and 3). That clearly implies the analytical method of deriving free-end compliance matrices for any ICB is feasible and much more efficient for further mechanism synthesis and optimization.

4. Compliance Analysis and Mobility Optimization of Generic Planar Parallelogram and Ortho-planar Spring Integrating Initially Curved Beams

In this section, we aim to conduct planar compliance analysis of the generic ICB-based parallelogram and spatial compliance analysis of Ortho-planar spring both employing screw theory as a linear modeling method and using a normalization-based method (21) for comparison purposes, followed by mobility optimization of these mechanisms.

Recalling the concept of position-space-based reconfiguration method (PSR (4)), the layout of a compliant mechanism can be restructured via changing the positions of each independent compliant modules (ICMs (4)) within their permitted position ranges to design and optimize

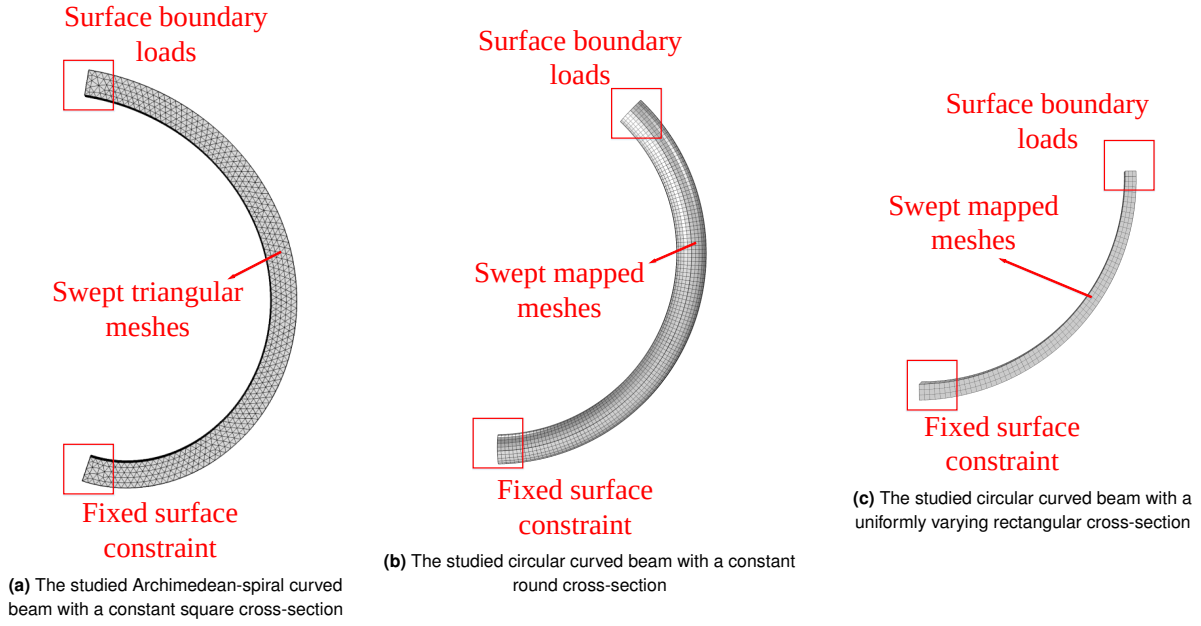


Fig. 8. FEA boundary conditions

Table 1. Comparison of free-end compliance of the beam defined in (26) between the analytical results (denoted by AM) and FEA results

Results	c_{s11} (10^{-6} m/N)	$c_{s21} = c_{s12}$ (10^{-5} m/N)	$c_{s61} = c_{s16}$ (10^{-4} m/N)	c_{s22} (10^{-5} m/N)	$c_{s62} = c_{s26}$ (10^{-4} m/N)	c_{s66} (10^{-3} m/N)
AM	7.4481	1.0101	2.0235	2.3722	3.3366	6.8114
FEA	7.4083	1.0048	2.0142	2.3672	3.3306	6.7968
ER	0.54%	0.53%	0.46%	0.21%	0.18%	0.21%

Results	c_{s33} (10^{-5} m/N)	$c_{s43} = c_{s34}$ (10^{-4} m/N)	$c_{s53} = c_{s35}$ (10^{-4} m/N)	c_{s44} (10^{-3} m/N)	$c_{s54} = c_{s45}$ (10^{-4} m/N)	c_{s55} (10^{-3} m/N)
AM	4.3370	-2.9877	-4.2257	8.6522	-2.0787	8.6383
FEA	4.3197	-2.9751	-4.2132	8.6317	-2.0849	8.6132
ER	0.40%	0.42%	0.42%	0.24%	0.24%	0.29%

Total computational time	AM	0.21 s	FEA	62.65 s
--------------------------	----	--------	-----	---------

mobility, such as designing degrees of freedom (DOF) and degrees of constraints (DOC) or reducing their parasitic motions for more accurate translational and rotational movements. Essentially, by introducing positional parameters into compliance synthesis of CMs, the final compliance matrix of CMs can be expressed as functions of these introduced positional parameters, based on which the whole process can be transformed into an optimization problem. Apart from positional parameters, a representative geometric parameter of ICBs is included to be studied here, which is θ_o (defined in Fig. 1) of ICBs, providing more possibilities for mechanism performance.

Many decent studies about designing and optimizing the geometry of CMs tend to use enumeration graphing method to capture the trend of mechanism performance versus geometric parameters (15)(32)(48)(49)(50)(51) for engineering aiding design. However, this method would have some limitations in the following scenarios. Firstly and most importantly, the enumeration graphing method would not be able to efficiently deal with multi-variable optimization problems especially when above three variables are studied. Secondly, multi-objective optimization problems are tough in this case if the objectives are conflicting, and decisions are normally made by designers' intuition and experience from enumeration graphs. Thirdly, in terms of single-objective optimization problem, it would be hard to ensure the global optimized solution when the trend is not monotonic (15)(49)(51). For example, points of inflection may be excluded from enumerated ranges; improper sampling density may ignore the existence of points of inflection, resulting in wrong judgment about the trend. Last, it tends to be computationally expensive when obtaining enumerated numerical solutions (15). To solve the mentioned problems, under the structure of Weighted-Sum Method (44), we use generic algorithm (or any gradient-based optimization algorithm) instead to directly obtain the globally optimized geometric parameters under the given multi-objectives, which is more efficient and straightforward.

Using the concept of PSR and our optimization strategy, we'll be able to find out the globally optimized solutions of ICB-based mechanism synthesis for the given design requirements. Practical constraints (such as mechanical interference or dimensional limit) are considered as well in this optimization process. In consideration of easier manufacturing process and the promotion of standard parts, circular curved beams are chosen to be studied for the following mechanism synthesis and optimization.

Table 2. Comparison of free-end compliance of the beam defined in (27) between the analytical results (denoted by AM) and FEA results

Results	c_{s11} (10^{-7} m/N)	$c_{s21} = c_{s12}$ (10^{-6} m/N)	$c_{s61} = c_{s16}$ (10^{-6} m/N)	c_{s22} (10^{-5} m/N)	$c_{s62} = c_{s26}$ (10^{-4} m/N)	c_{s66} (10^{-3} m/N)
AM	9.7578	-1.1098	5.1591	1.5631	2.9843	7.4074
FEA	9.9000	-1.1155	5.0684	1.5703	2.9980	7.4426
ER	0.14%	0.50%	1.97%	0.46%	0.46%	0.47%

Results	c_{s33} (10^{-5} m/N)	$c_{s43} = c_{s34}$ (10^{-5} m/N)	$c_{s53} = c_{s35}$ (10^{-4} m/N)	c_{s44} (10^{-3} m/N)	$c_{s54} = c_{s45}$ (10^{-4} m/N)	c_{s55} (10^{-3} m/N)
AM	1.9412	-3.8134	-3.4320	8.7543	2.3578	8.2827
FEA	1.9555	-3.8134	-3.4545	8.8002	2.3147	8.3373
ER	0.73%	0.00%	0.65%	0.52%	1.86%	0.65%

Total computational time	AM	0.19 s	FEA	40.00 s
--------------------------	----	--------	-----	---------

Table 3. Comparison of free-end compliance of the beam defined in (28) between the analytical results (denoted by AM) and FEA results

Results	c_{s11} (10^{-5} m/N)	$c_{s21} = c_{s12}$ (10^{-5} m/N)	$c_{s61} = c_{s16}$ (10^{-4} m/N)	c_{s22} (10^{-5} m/N)	$c_{s62} = c_{s26}$ (10^{-3} m/N)	c_{s66} (10^{-2} m/N)
AM	1.0961	-1.6552	-5.0131	2.9169	1.0416	5.1846
FEA	1.0913	-1.6489	-4.9971	2.9094	1.0388	5.1613
ER	0.44%	0.38%	0.32%	0.25%	0.27%	0.45%

Results	c_{s33} (10^{-5} m/N)	$c_{s43} = c_{s34}$ (10^{-5} m/N)	$c_{s53} = c_{s35}$ (10^{-4} m/N)	c_{s44} (10^{-2} m/N)	$c_{s54} = c_{s45}$ (10^{-2} m/N)	c_{s55} (10^{-2} m/N)
AM	1.7651	-3.3269	-5.4880	3.6384	1.0930	2.5657
FEA	1.7301	-3.2373	-5.3765	3.5511	1.0832	2.5304
ER	2.02%	2.77%	2.07%	2.46%	0.90%	1.40%

Total computational time	AM	0.23 s	FEA	15 s
--------------------------	----	--------	-----	------

228 A. Planar Compliance Analysis and Geometric Optimization of Parallelogram Mechanisms.

A.1. Planar Compliance Modeling. Similar to the generic straight-beam-based parallelogram (41)(51)(52)(53)(54), the circular-curved-beam-based one is structured in a symmetric manner where the parallelogram is composed of a rigid base, a rigid motion stage and two legs in between the former two shown in Fig. 10. The legs are named as Leg 1 and Leg 2 where each leg comprises two compliant circular beams (labeled 11#, 12#, 21# and 22#) and one rigid link in between them. Logically, the general planar free-end compliance matrix C_P of ICBs can be deduced from the spatial compliance matrix C_S (defined in Eq. 2) into a 3-by-3 matrix:

$$C_P = \begin{bmatrix} c_{p11} & c_{p12} & c_{p13} \\ c_{p21} & c_{p22} & c_{p23} \\ c_{p31} & c_{p32} & c_{p33} \end{bmatrix} = \begin{bmatrix} c_{s11} & c_{s12} & c_{s16} \\ c_{s21} & c_{s22} & c_{s26} \\ c_{s61} & c_{s62} & c_{s66} \end{bmatrix}$$


229 According to the proposed method (Eq. 9 to 14), the general planar free-end compliance matrix C_{PC} of circular-curved beams is formulated in
230 Eq. 30:

$$C_{PC} = \begin{bmatrix} c_{pc11} & c_{pc12} & c_{pc13} \\ c_{pc21} & c_{pc22} & c_{pc23} \\ c_{pc31} & c_{pc32} & c_{pc33} \end{bmatrix} \quad [30]$$

where


$$\begin{aligned}
c_{pc11} &= \frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta))^2 d\theta + \frac{r}{EA} \int_0^{\theta_o} (\sin(\theta))^2 d\theta; \\
c_{pc21} &= c_{pc12} = \pm \left[-\left(\frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta))(\cos(\theta) - \cos(\theta_o)) d\theta - \frac{r}{EA} \int_0^{\theta_o} \sin(\theta) \cos(\theta) d\theta \right) \right]; \\
c_{pc31} &= c_{pc13} = \pm \left[-\frac{r^2}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta)) d\theta \right]; \\
c_{pc22} &= \frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\cos(\theta) - \cos(\theta_o))^2 d\theta + \frac{r}{EA} \int_0^{\theta_o} (\cos(\theta))^2 d\theta; \\
c_{pc32} &= c_{pc23} = \frac{r^2}{EI_{m_z}} \int_0^{\theta_o} (\cos(\theta) - \cos(\theta_o)) d\theta; \\
c_{pc33} &= \frac{r\theta_o}{EI_{m_z}}.
\end{aligned}$$

Compliance reference point



(a) Anti-clockwise circular-curved beam

Compliance reference point



(b) Clockwise circular-curved beam

Fig. 9. Elementary flexible member: circular-curved beams

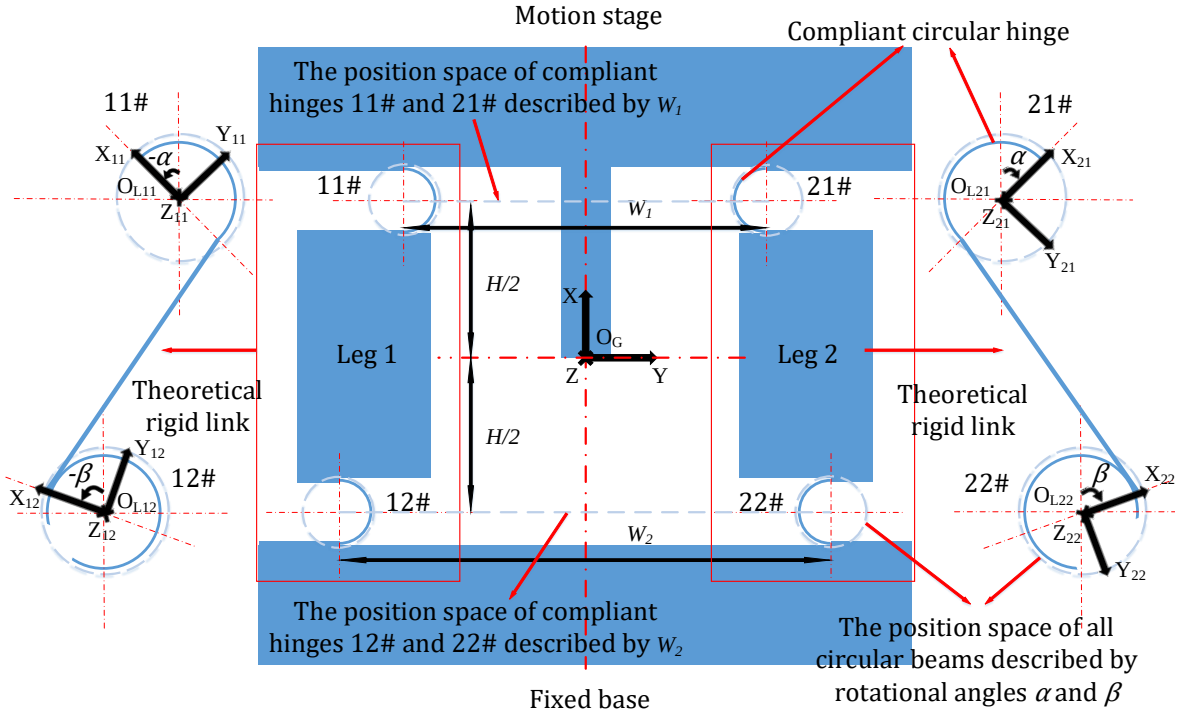


Fig. 10. Schematic diagram of circular-beam-based planar mechanism

It's worth noticing that the choice of signs in c_{pc21} , c_{pc12} , c_{pc31} and c_{pc13} depends on the direction of beam axis from the base to the tip. If it's anti-clockwise like the beam shown in Fig. 9a, the sign is positive. Otherwise, it's negative (Fig. 9b). In the following paper, the compliance matrix of anti-clockwise ones are denoted as C_S , C_P and so on whereas the clockwise ones are denoted by C_S^* or C_P^* , etc for simplicity. For more convenient compliance synthesis, circular-curved beams need to be considered as a compliant kinematic hinge with its compliance reference point set up at the center of the circle displayed in Fig. 9. Therefore, the transferred compliance matrices C_{PC_c} from the free-end ones are derived in Eq. 31:

$$\begin{aligned} C_{PC_c} &= (D_{tr}^T (C_{PC})^{-1} D_{tr})^{-1} \\ C_{PC_c}^* &= (D_{tr}^{*T} (C_{PC}^*)^{-1} D_{tr}^*)^{-1} \end{aligned} \quad [31]$$

where

$$D_{tr} = \begin{bmatrix} 1 & 0 & -r \cos(\theta_o - \frac{\pi}{2}) \\ 0 & 1 & r \sin(\theta_o - \frac{\pi}{2}) \\ 0 & 0 & 1 \end{bmatrix}, \quad D_{tr}^* = \begin{bmatrix} 1 & 0 & r \cos(\theta_o - \frac{\pi}{2}) \\ 0 & 1 & r \sin(\theta_o - \frac{\pi}{2}) \\ 0 & 0 & 1 \end{bmatrix}$$

As displayed in Fig. 10, the rotational position space of the circular-curved beam can be demonstrated by a dash-line circle with its center also at the compliance reference point where the exact rotational position can be defined by two angles α and β ($-\alpha$ and $-\beta$ are used to locate beam 11# and beam 12# while α and β are used to locate beam 21# and beam 22#). The distance between the compliance reference points of beams 11# and 21# is denoted by W_1 while the distance between those of beams 12# and 22# is denoted by W_2 , and they both describe the horizontal position space of the corresponding two beams. Besides, the distance between beams 11# and 12# or beams 21# and 22# is denoted by H , which is the characteristic length of the mechanism. also representing the overall dimension of the mechanism. The fixed global coordinate system $O_G - XYZ$ is set up at a point which coincides with the geometric center of the undeformed mechanism and 4 local coordinate systems ($O_{L11} - X_{11}Y_{11}Z_{11}$, $O_{L12} - X_{12}Y_{12}Z_{12}$, $O_{L21} - X_{21}Y_{21}Z_{21}$ and $O_{L22} - X_{22}Y_{22}Z_{22}$) are defined at the 4 compliance reference points of the 4 circular beams respectively, which are all demonstrated in Fig. 10. With the predefined geometric parameters above, we can derive the planar compliance matrix of the whole mechanism C_{PG} at O_G , starting from synthesizing the compliance matrix of every single compliant module (which are C_{L11} at O_{L11} , C_{L12} at O_{L12} , C_{L21} at O_{L21} and C_{L22} at O_{L22}) using screw theory (Eq. 32):

$$\begin{aligned} C_{PG} &= (((T_{11}^T D_{11}^T (R_{11} C_{L11} R_{11}^T)^{-1} D_{11} T_{11})^{-1} + (T_{12}^T D_{12}^T (R_{12} C_{L12} R_{12}^T)^{-1} D_{12} T_{12})^{-1})^{-1} + ((T_{21}^T D_{21}^T (R_{21} C_{L21} R_{21}^T)^{-1} \\ &D_{21} T_{21})^{-1} + (T_{22}^T D_{22}^T (R_{22} C_{L22} R_{22}^T)^{-1} D_{22} T_{22})^{-1})^{-1} \end{aligned} \quad [32]$$

where

$$R_{11} = \begin{bmatrix} \cos(-\alpha) & -\sin(-\alpha) & 0 \\ \sin(-\alpha) & \cos(-\alpha) & 0 \\ 0 & 0 & 1 \end{bmatrix}, D_{11} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & H/2 \\ 0 & 0 & 1 \end{bmatrix}, T_{11} = \begin{bmatrix} 1 & 0 & W_1/2 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix};$$

$$R_{12} = \begin{bmatrix} \cos(-\beta) & -\sin(-\beta) & 0 \\ \sin(-\beta) & \cos(-\beta) & 0 \\ 0 & 0 & 1 \end{bmatrix}, D_{12} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & -H/2 \\ 0 & 0 & 1 \end{bmatrix}, T_{12} = \begin{bmatrix} 1 & 0 & W_2/2 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix};$$

$$R_{21} = \begin{bmatrix} \cos(\alpha) & -\sin(\alpha) & 0 \\ \sin(\alpha) & \cos(\alpha) & 0 \\ 0 & 0 & 1 \end{bmatrix}, D_{21} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & H/2 \\ 0 & 0 & 1 \end{bmatrix}, T_{21} = \begin{bmatrix} 1 & 0 & -W_1/2 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix};$$

$$R_{22} = \begin{bmatrix} \cos(\beta) & -\sin(\beta) & 0 \\ \sin(\beta) & \cos(\beta) & 0 \\ 0 & 0 & 1 \end{bmatrix}, D_{22} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & -H/2 \\ 0 & 0 & 1 \end{bmatrix}, T_{22} = \begin{bmatrix} 1 & 0 & -W_2/2 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}.$$

In particular, the different choices of anti-clockwise beams and clockwise beam as the elementary flexible members in the mechanism synthesis result in four combinations/scenarios:

* Scenario A

$$\begin{aligned} C_{L11} &= C_{L12} = C_{PC_c} \\ C_{L21} &= C_{L22} = C_{PC_c}^* \end{aligned}$$

* Scenario B

$$\begin{aligned} C_{L11} &= C_{L12} = C_{PC_c}^* \\ C_{L21} &= C_{L22} = C_{PC_c} \end{aligned}$$

* Scenario C

$$\begin{aligned} C_{L12} &= C_{L21} = C_{PC_c} \\ C_{L11} &= C_{L22} = C_{PC_c}^* \end{aligned}$$

* Scenario D

$$\begin{aligned} C_{L12} &= C_{L21} = C_{PC_c}^* \\ C_{L11} &= C_{L22} = C_{PC_c} \end{aligned}$$

So far, we can obtain the final planar compliance matrix C_{PG} of the circular-beam-based parallelogram (Eq. 33):

$$C_{PG} = \begin{bmatrix} c_{pg11} & 0 & 0 \\ 0 & c_{pg22} & c_{pg23} \\ 0 & c_{pg32} & c_{pg33} \end{bmatrix} \quad [33]$$

Its normalized compliance matrix C_{PG_n} can be formulated (see details in (21)) as follows for non-dimensional comparison (Eq. 34):

$$C_{PG_n} = \begin{bmatrix} c_{pgn11} & 0 & 0 \\ 0 & c_{pgn22} & c_{pgn23} \\ 0 & c_{pgn32} & c_{pgn33} \end{bmatrix} = \begin{bmatrix} \frac{c_{pg11}}{\frac{H^3}{EI_{m_z}}} & 0 & 0 \\ 0 & \frac{c_{pg22}}{\frac{H^3}{EI_{m_z}}} & \frac{c_{pg23}}{\frac{H^2}{EI_{m_z}}} \\ 0 & \frac{c_{pg32}}{\frac{H^2}{EI_{m_z}}} & \frac{c_{pg33}}{\frac{H}{EI_{m_z}}} \end{bmatrix} \quad [34]$$

A.2. Geometric Optimization Strategy. Since α , β , W_1 and W_2 that describe the position spaces of all compliant hinges and one geometric parameter θ_o of circular curved beams are the key parameters to be studied for further mechanism optimization, the rest geometric and material parameters are assigned in (35):

$$\begin{aligned} E &= 69 \times 10^9 \text{ Pa} \\ \nu &= 0.3 \\ w &= 0.001 \text{ m} \\ h &= 0.003 \text{ m} \\ r &= 0.010 \text{ m} \\ H &= 0.080 \text{ m} \end{aligned} \quad [35]$$

Therefore, all elements in C_{PG_n} are the functions of the studied five parameters: α , β , W_1 , W_2 and θ_o , depending on which the process of improving the performance of the mechanism is logically deduced into a multi-variable (α , β , W_1 , W_2 and θ_o) and multi-objective (to maximize $\frac{c_{pgn22}}{c_{pgn11}}$, $\frac{c_{pgn22}}{c_{pgn33}}$ and $\frac{c_{pgn22}}{c_{pgn23}}$) optimization problem. c_{pgn22} stands for the compliance in Y direction (primary motion) whereas c_{pgn11} and c_{pgn33} stands for the compliance in X and Z directions (undesired motions); c_{pgn23} and c_{pgn32} are the compliance of parasitic motion regarding Y and Z directions. Therefore, the three objectives $\frac{c_{pgn22}}{c_{pgn11}}$, $\frac{c_{pgn22}}{c_{pgn33}}$ and $\frac{c_{pgn22}}{c_{pgn23}}$ imply that by maximizing the ratio of primary-motion compliance to undesired-motion and parasitic compliance under given constraints, the optimal designs can be obtained accordingly. To deal with these multi objectives, Weighted-Sum Method (44) is used, which scalarizes a set of objectives into a single objective by pre-multiplying each objective with a user-supplied weight:

$$\begin{aligned} \max \quad & Z(\alpha, \beta, W_1, W_2, \theta_o) = \epsilon_1 \frac{c_{pgn22}}{c_{pgn11}} + \epsilon_2 \frac{c_{pgn22}}{c_{pgn33}} + \epsilon_3 \frac{c_{pgn22}}{c_{pgn23}} \\ \text{s.t.} \quad & -\pi \leq \alpha \leq \pi \\ & -\pi \leq \beta \leq \pi \\ & 2r + w < W_1 \leq H \\ & 2r + w < W_2 \leq H \\ & \pi/2 \leq \theta_o \leq 3\pi/2 \end{aligned}$$

where ϵ_1 , ϵ_2 and ϵ_3 are the weights of each single-optimized target respectively satisfying $\epsilon_1 + \epsilon_2 + \epsilon_3 = 1$; $Z(\alpha, \beta, W_1, W_2, \theta_o)$ is the objective function; Taking their weights into account, ϵ_1 , ϵ_2 and ϵ_3 are assigned: $\epsilon_1 = \epsilon_2 = \epsilon_3 = 1/3$. The built-in Genetic Algorithm in MATLAB is used to obtain the globally optimal results with the following key parameters assigned: the population size is set up as 50; the number of maximum stall generations is assigned to 100; the random numbers generated within the bounds of the mentioned five variables are chosen as the initial population.

A.3. Globally Optimal Results with FEA Verification. The globally optimal results of Scenarios A, B, C and D are listed in (36), (37), (38) and (39) respectively with the corresponding consequent normalized compliance information obtained from the analytical models and FEA verification displayed in Tables. 4 to 7 and their geometric shapes illustrated in Figs. 11a to 11d. The optimal design of Scenario A (Fig. 11a) has two inverted legs whereas that of Scenario B (Fig. 11b) has two non-inverted legs. The optimal designs of Scenario C (Fig. 11c) and D (Fig. 11d) present hybrid structures of the former two, both having two half-inverted legs in them. According to Tables. 4 to 7, the analytical results are verified by FEA results with maximum error being 2.73%. The values of $\frac{c_{pgn22}}{c_{pgn11}}$ and $\frac{c_{pgn22}}{c_{pgn33}}$ are up to around 2000 and 700 respectively, which implies that the optimal mechanisms present DOF in Y direction and DOC in X direction and around Z axis. The ratio $\frac{c_{pgn23}}{c_{pgn22}}$ reaches 0, indicating that the mechanism nearly has no X-axis parasitic motion when translationally moving in Y direction. It should be remarked that the conclusions above are only valid when deformation is small.

In the FEA, the boundary conditions were set up in the same manner of the analytical models where the compliance reference point of whole mechanism C_{PG} at O_G (Fig. 10) was evaluated (Fig. 12): the motion stage and 2 thick links were set up as rigid bodies in COMSOL while the rest 4 compliant beams were set as deformable bodies (Fig. 12); swept mapped meshes were used with the maximum and minimal

mesh sizes being 0.02 mm and 2 mm respectively; the relative tolerance of the convergence error was set as 0.001 by default; only small deformations were considered so geometric non-linearity function was not activated; the geometric and material parameters were chosen from (35), (36), (37), (38) and (39) respectively.

* Globally Optimal Results of Scenario A

$$\alpha = -\frac{3\pi}{4}; \beta = -\frac{3\pi}{4}; W_1 = H = 0.080 \text{ m}; W_2 = H = 0.080 \text{ m}; \theta_o = \frac{\pi}{2} \quad [36]$$

* Globally Optimal Results of Scenario B

$$\alpha = -\frac{\pi}{4}; \beta = -\frac{\pi}{4}; W_1 = H = 0.080 \text{ m}; W_2 = H = 0.080 \text{ m}; \theta_o = \frac{\pi}{2} \quad [37]$$

* Globally Optimal Results of Scenario C

$$\alpha = -\frac{\pi}{4}; \beta = -\frac{3\pi}{4}; W_1 = H = 0.080 \text{ m}; W_2 = H = 0.080 \text{ m}; \theta_o = \frac{\pi}{2} \quad [38]$$

* Globally Optimal Results of Scenario D

$$\alpha = -\frac{3\pi}{4}; \beta = -\frac{\pi}{4}; W_1 = H = 0.080 \text{ m}; W_2 = H = 0.080 \text{ m}; \theta_o = \frac{\pi}{2} \quad [39]$$

Table 4. Comparison between analytical results and FEA (without considering geometric non-linearity) results regarding the globally optimal design of Scenario A

Scenarios A	Results	c_{pgn11}	c_{pgn22}	c_{pgn33}	$\frac{c_{pgn22}}{c_{pgn11}}$	$\frac{c_{pgn22}}{c_{pgn33}}$	$\frac{c_{pgn23}}{c_{pgn22}}$
$\alpha = -\frac{3\pi}{4} \quad \beta = -\frac{3\pi}{4} \quad \theta_o = \frac{\pi}{2}$ $W_1 = 0.080 \text{ m} \quad W_2 = 0.080 \text{ m}$	AM	2.5839×10^{-5}	4.9645×10^{-2}	6.8843×10^{-5}	1.9213×10^3	7.2113×10^2	≈ 0
	FEA	2.6256×10^{-5}	4.9105×10^{-2}	6.9937×10^{-4}	1.8702×10^3	7.0213×10^2	≈ 0
	ER	1.59%	1.10%	1.56%	2.73%	2.71%	$\approx 0\%$

Table 5. Comparison between analytical results and FEA (without considering geometric non-linearity) results regarding the globally optimal design of Scenario B

Scenarios A	Results	c_{pgn11}	c_{pgn22}	c_{pgn33}	$\frac{c_{pgn22}}{c_{pgn11}}$	$\frac{c_{pgn22}}{c_{pgn33}}$	$\frac{c_{pgn23}}{c_{pgn22}}$
$\alpha = -\frac{\pi}{4} \quad \beta = -\frac{\pi}{4} \quad \theta_o = \frac{\pi}{2}$ $W_1 = 0.080 \text{ m} \quad W_2 = 0.080 \text{ m}$	AM	2.5839×10^{-5}	4.9645×10^{-2}	6.8843×10^{-5}	1.9213×10^3	7.2113×10^2	≈ 0
	FEA	2.6256×10^{-5}	4.9105×10^{-2}	6.9937×10^{-4}	1.8702×10^3	7.0213×10^2	≈ 0
	ER	1.59%	1.10%	1.56%	2.73%	2.71%	$\approx 0\%$

Table 6. Comparison between analytical results and FEA (without considering geometric non-linearity) results regarding the globally optimal design of Scenario C

Scenarios A	Results	c_{pgn11}	c_{pgn22}	c_{pgn33}	$\frac{c_{pgn22}}{c_{pgn11}}$	$\frac{c_{pgn22}}{c_{pgn33}}$	$\frac{c_{pgn23}}{c_{pgn22}}$
$\alpha = -\frac{\pi}{4} \quad \beta = -\frac{3\pi}{4} \quad \theta_o = \frac{\pi}{2}$ $W_1 = 0.080 \text{ m} \quad W_2 = 0.080 \text{ m}$	AM	2.5839×10^{-5}	4.9645×10^{-2}	6.8843×10^{-5}	1.9213×10^3	7.2113×10^2	≈ 0
	FEA	2.6256×10^{-5}	4.9105×10^{-2}	6.9937×10^{-4}	1.8702×10^3	7.0213×10^2	≈ 0
	ER	1.59%	1.10%	1.56%	2.73%	2.71%	$\approx 0\%$

A.4. Design of Circular-curved-beam-based Parallelograms with Bidirectional Anti-buckling Capacity. Similar to straight-beam-based parallelograms, load-bearing capacity is also one of the key performances of ICB-based parallelograms. Although the proposed optimal design from Scenario B (see Fig. 11b) does not experience mechanism buckling under heavy compression payloads, it still suffers from obvious stiffness reduction along payload direction (the negative X direction) illustrated in Fig. 13a where the relationship of X-axis stiffness against X-axis displacement was obtained from FEA with nonlinear geometry function activated and Y-axis displacement fixed to 0. It should be noticed that the X-axis stiffness gradually increases along the positive X axis, which implies the stiffness of the mechanism will increase if tension payloads are exerted. Due to the involvement of inverted legs in the optimal design from Scenario B (see Fig. 11a), a similar plot displaying an anti-symmetric relationship is illustrated in Fig. 13b. Inspired by their X-axis stiffness properties, a unique design that makes the most of the optimal designs of Scenario A (Fig. 11a) and Scenario B (Fig. 11b) was proposed (Fig. 14a), where no matter payloads in positive or negative X directions are exerted, there are always four circular-curved beams under tension and four under compression to

Table 7. Comparison between analytical results and FEA (without considering geometric non-linearity) results regarding the globally optimal design of Scenario D

Scenarios A	Results	c_{pgn11}	c_{pgn22}	c_{pgn33}	$\frac{c_{pgn22}}{c_{pgn11}}$	$\frac{c_{pgn22}}{c_{pgn33}}$	$\frac{c_{pgn23}}{c_{pgn22}}$
$\alpha = -\frac{3\pi}{4}$ $\beta = -\frac{\pi}{4}$ $\theta_o = \frac{\pi}{2}$ $W_1 = 0.080$ m $W_2 = 0.080$ m	AM	2.5839×10^{-5}	4.9645×10^{-2}	6.8843×10^{-5}	1.9213×10^3	7.2113×10^2	≈ 0
	FEA	2.6256×10^{-5}	4.9105×10^{-2}	6.9937×10^{-4}	1.8702×10^3	7.0213×10^2	≈ 0
	ER	1.59%	1.10%	1.56%	2.73%	2.71%	$\approx 0\%$

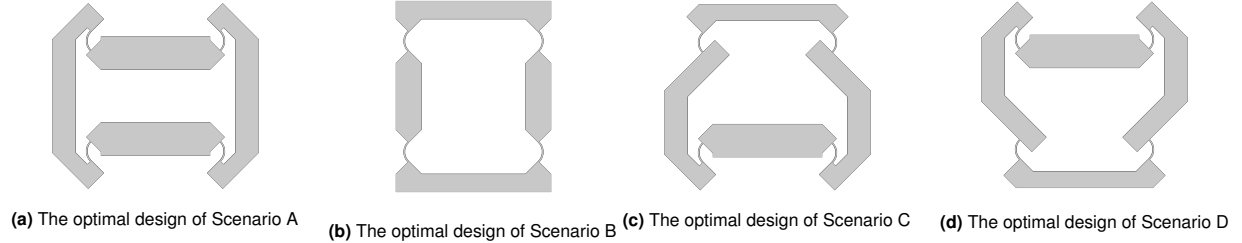


Fig. 11. The optimal designs of circular-curved-beam-based parallelogram

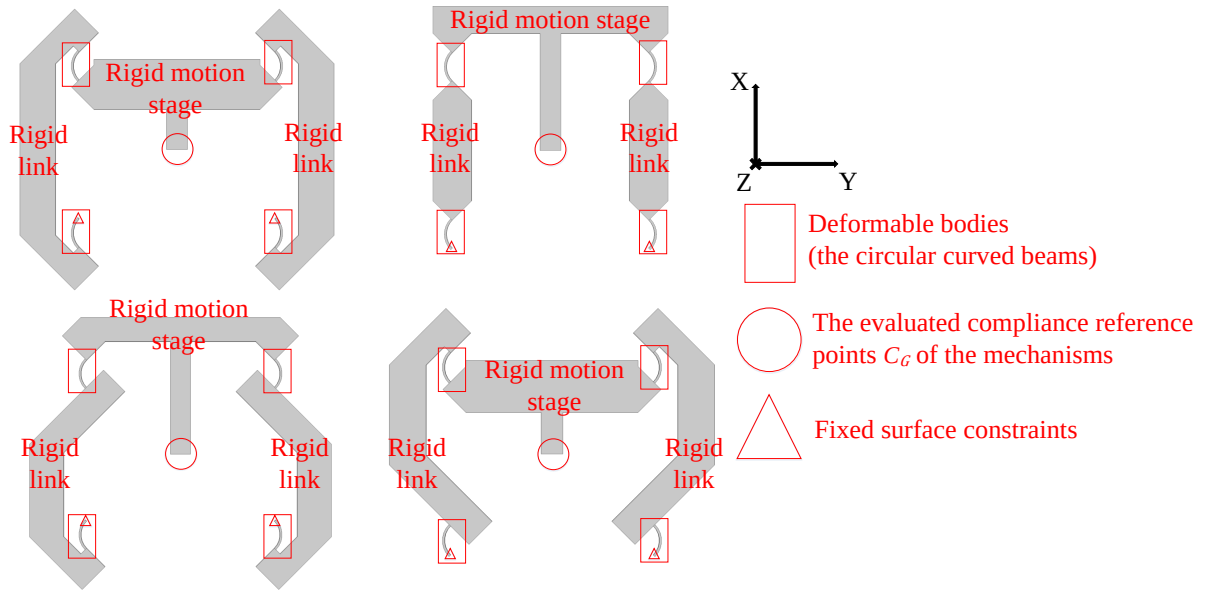


Fig. 12. FEA verification boundary conditions of the optimal designs from Scenario A to D

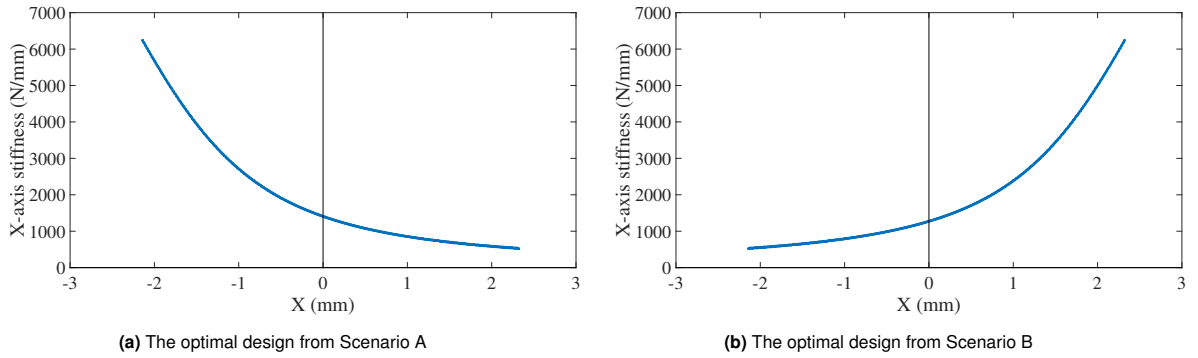


Fig. 13. X-axis stiffness against X-axis displacement relationship of the optimal design from Scenario A and B

compensate stiffness reduction in bidirections. In particular, W_a and W_b are introduced to define the horizontal distances of inverted legs and non-inverted legs respectively. Its relationship of X-axis stiffness against X-axis displacement obtained from FEA (where $W_a = 0.080$ m

and $W_b = 0.010$ m with the rest geometric and material parameters and boundary conditions unchanged) is displayed Fig. 14b: the X-axis stiffness increases along both negative and positive X directions, which proves that the new design present bidirectional anti-buckling and high load-bearing capacity. Compared with the straight-beam-involved anti-buckling mechanism proposed in our previous work (15), this ICB-based design doesn't experience stiffness reduction under heavy payloads but the former does (see Fig. 16 in (15)), which presents better load-bearing ability.

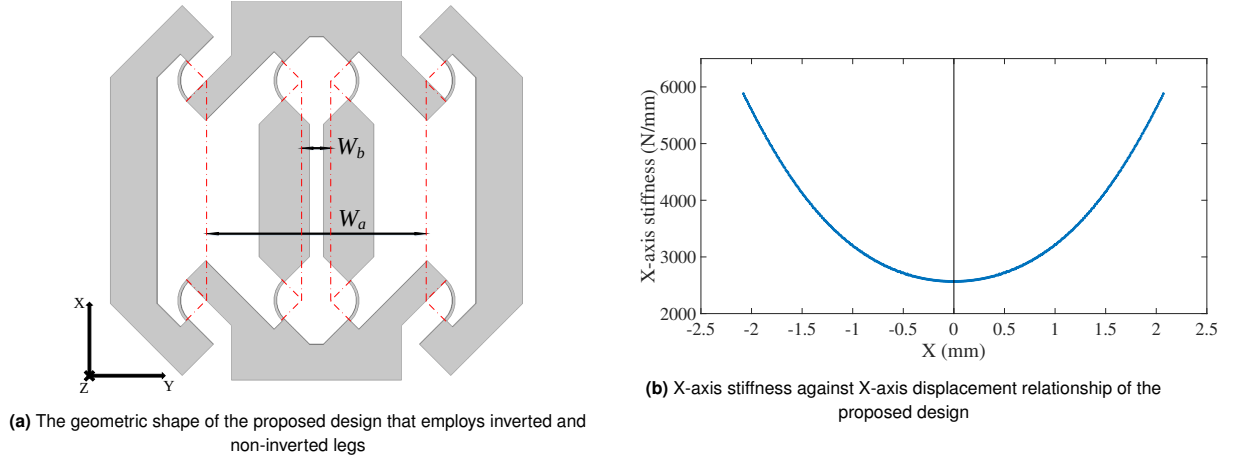


Fig. 14. The proposed design with high load-bearing and anti-buckling capacity

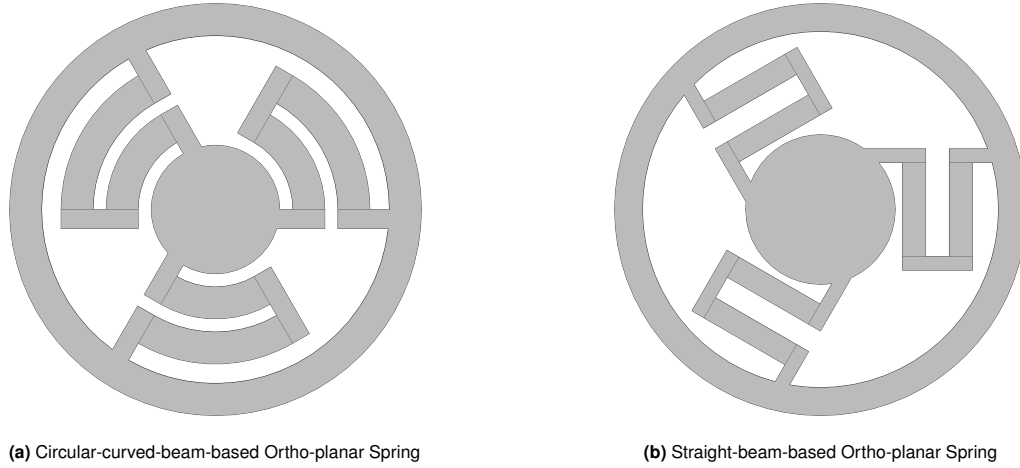


Fig. 15. Ortho-planar Springs

B. Spatial Compliance Analysis and Geometric Optimization of an circular-beam-based Ortho-planar Spring. As a classic type of compliant linear motion mechanisms, Ortho-planar springs have many advantages (34)(55)(56): they're compact; they are located in a plane, but being able to provide non-rotating out-of-plane translational motion; they can be easily manufactured in a single piece of material; it has the potential for larger deflections than conventional planar springs. From a mechanical point of view, Ortho-planar springs are composed of a base, a central motion platform and several U-shaped legs (Fig.15) where each leg is divided into two thin flexible beams (34). Ortho-planar springs are commonly used in many applications especially sophisticated and compact mechanisms: sensors (57)(58)(59); one-way micro-valve that can be used in a micro-pump (56); microelectromechanical systems (60); continuum robots (49)(61)(62)(63). Fig.15 demonstrates two types of Ortho-planar springs: circular-beam-based ones (Fig. 15a) and straight-beam-based ones (Fig. 15b) where (49)(61)(62)(63) have conducted spatial compliance analysis of the straight-beam-based Ortho-planar springs. In this section, we aim to conduct spatial compliance analysis of circular-beam-based ones, followed by geometric optimization via genetic algorithm. FEA validation is presented to verify the optimal analytical results.

B.1. Spatial Compliance Modeling. In this section, we aim to conduct spatial compliance analysis of circular-curved-beam-based Ortho-planar springs where the derivation of compliance matrix of a single circular curved beam C_{SC} is first presented via the proposed method (Eqs. 6 to

22 and Eq. 25) shown in Eq. 40:

$$C_{SC} = \begin{bmatrix} c_{sc11} & c_{sc12} & 0 & 0 & 0 & c_{sc16} \\ c_{sc21} & c_{sc22} & 0 & 0 & 0 & c_{sc26} \\ 0 & 0 & c_{sc33} & c_{sc34} & c_{sc35} & 0 \\ 0 & 0 & c_{sc43} & c_{sc44} & c_{sc45} & 0 \\ 0 & 0 & c_{sc53} & c_{sc54} & c_{sc55} & 0 \\ c_{sc61} & c_{sc62} & 0 & 0 & 0 & c_{sc66} \end{bmatrix} \quad [40]$$

where

$$\begin{aligned} c_{sc11} &= \frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta))^2 d\theta + \frac{r}{EA} \int_0^{\theta_o} (\sin(\theta))^2 d\theta; \\ c_{sc21} &= c_{sc12} = -\left(\frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta))(\cos(\theta) - \cos(\theta_o)) d\theta - \frac{r}{EA} \int_0^{\theta_o} \sin(\theta) \cos(\theta) d\theta\right); \\ c_{sc61} &= c_{sc16} = -\frac{r^2}{EI_{m_z}} \int_0^{\theta_o} (\sin(\theta_o) - \sin(\theta)) d\theta; \\ c_{sc22} &= \frac{r^3}{EI_{m_z}} \int_0^{\theta_o} (\cos(\theta) - \cos(\theta_o))^2 d\theta + \frac{r}{EA} \int_0^{\theta_o} (\cos(\theta))^2 d\theta; \\ c_{sc62} &= c_{sc26} = \frac{r^2}{EI_{m_z}} \int_0^{\theta_o} (\cos(\theta) - \cos(\theta_o)) d\theta; \\ c_{sc66} &= \frac{r\theta_o}{EI_{m_z}}. \\ c_{sc33} &= \frac{r^3}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} (\sin(\pi - \theta_o + \theta))^2 d\theta + \frac{r^3}{GI_p} \int_0^{\theta_o} (1 + \cos(\pi - \theta_o + \theta))^2 d\theta; \\ c_{sc62} &= c_{sc26} = \frac{r^2}{EI_{m_z}} \int_0^{\theta_o} (\cos(\theta) - \cos(\theta_o)) d\theta; \\ c_{sc66} &= \frac{r\theta_o}{EI_{m_z}}. \\ c_{sc33} &= \frac{r^3}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} (\sin(\pi - \theta_o + \theta))^2 d\theta + \frac{r^3}{GI_p} \int_0^{\theta_o} (1 + \cos(\pi - \theta_o + \theta))^2 d\theta; \\ c_{sc53} &= c_{sc35} = -\frac{r^2}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} \sin(\pi - \theta_o + \theta) \sin(\theta) d\theta - \frac{r^2}{GI_p} \int_0^{\theta_o} (1 + \cos(\pi - \theta_o + \theta)) \cos(\theta) d\theta; \\ c_{sc44} &= \frac{r}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} (\cos(\theta))^2 d\theta + \frac{r}{GI_p} \int_0^{\theta_o} (\sin(\theta))^2 d\theta; \\ c_{sc54} &= c_{sc45} = -\frac{r}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} \cos(\theta) \sin(\theta) d\theta + \frac{r}{GI_p} \int_0^{\theta_o} \cos(\theta) \sin(\theta) d\theta; \\ c_{sc55} &= \frac{r}{EI_{m_{\hat{u}_n}}} \int_0^{\theta_o} (\sin(\theta))^2 d\theta + \frac{r}{GI_p} \int_0^{\theta_o} (\cos(\theta))^2 d\theta; \end{aligned}$$

Similarly, we can obtain the spatial compliance matrix C_{SG} at O_G on the motion stage of the Ortho-planar spring from every single flexible member (Fig. 16) shown in Eq. 41:

$$\begin{aligned} C_{SG} &= (D_3^T ((D_2 (R_2 (D_1^T (R_1 C_{SC_2} R_1^T)^{-1} D_1)^{-1} R_2^T)^{-1} D_2)^{-1} + R_4 R_3 C_{SC_1} R_3^T R_4^T)^{-1} D_3 \\ &+ R_5 D_3^T ((D_2 (R_2 (D_1^T (R_1 C_{SC_2} R_1^T)^{-1} D_1)^{-1} R_2^T)^{-1} D_2)^{-1} + R_4 R_3 C_{SC_1} R_3^T R_4^T)^{-1} D_3 R_5^T \\ &+ R_6 D_3^T ((D_2 (R_2 (D_1^T (R_1 C_{SC_2} R_1^T)^{-1} D_1)^{-1} R_2^T)^{-1} D_2)^{-1} + R_4 R_3 C_{SC_1} R_3^T R_4^T)^{-1} D_3 R_6^T)^{-1} \end{aligned} \quad [41]$$

where

$$R_1 = \begin{bmatrix} \cos(\theta_o - \frac{\pi}{2}) & -\sin(\theta_o - \frac{\pi}{2}) & 0 & 0 & 0 & 0 \\ \sin(\theta_o - \frac{\pi}{2}) & \cos(\theta_o - \frac{\pi}{2}) & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos(\theta_o - \frac{\pi}{2}) & -\sin(\theta_o - \frac{\pi}{2}) & 0 \\ 0 & 0 & 0 & \sin(\theta_o - \frac{\pi}{2}) & \cos(\theta_o - \frac{\pi}{2}) & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix};$$

$$\begin{aligned}
332 \quad R_2 &= \begin{bmatrix} \cos(\pi) & -\sin(\pi) & 0 & 0 & 0 & 0 \\ \sin(\pi) & \cos(\pi) & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos(\pi) & -\sin(\pi) & 0 \\ 0 & 0 & 0 & \sin(\pi) & \cos(\pi) & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; R_3 = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & \cos(\pi) & -\sin(\pi) & 0 & 0 & 0 \\ 0 & \sin(\pi) & \cos(\pi) & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & \cos(\pi) & -\sin(\pi) \\ 0 & 0 & 0 & 0 & \sin(\pi) & \cos(\pi) \end{bmatrix}; \\
333 \quad R_4 &= \begin{bmatrix} \cos(\frac{\pi}{2}) & -\sin(\frac{\pi}{2}) & 0 & 0 & 0 & 0 \\ \sin(\frac{\pi}{2}) & \cos(\frac{\pi}{2}) & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & \cos(\frac{\pi}{2}) & -\sin(\frac{\pi}{2}) \\ 0 & 0 & 0 & 0 & \sin(\frac{\pi}{2}) & \cos(\frac{\pi}{2}) \end{bmatrix}; R_5 = \begin{bmatrix} \cos(-\frac{2\pi}{3}) & -\sin(-\frac{2\pi}{3}) & 0 & 0 & 0 & 0 \\ \sin(-\frac{2\pi}{3}) & \cos(-\frac{2\pi}{3}) & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos(-\frac{2\pi}{3}) & -\sin(-\frac{2\pi}{3}) & 0 \\ 0 & 0 & 0 & \sin(-\frac{2\pi}{3}) & \cos(-\frac{2\pi}{3}) & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; \\
334 \quad R_6 &= \begin{bmatrix} \cos(-\frac{4\pi}{3}) & -\sin(-\frac{4\pi}{3}) & 0 & 0 & 0 & 0 \\ \sin(-\frac{4\pi}{3}) & \cos(-\frac{4\pi}{3}) & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos(-\frac{4\pi}{3}) & -\sin(-\frac{4\pi}{3}) & 0 \\ 0 & 0 & 0 & \sin(-\frac{4\pi}{3}) & \cos(-\frac{4\pi}{3}) & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; \\
335 \quad D_1 &= \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & -d \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & d & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; D_2 = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & -r_1(-1 + \cos(\theta_o)) \\ 0 & 1 & 0 & 0 & 0 & -r_1 \sin(\theta_o) \\ 0 & 0 & 1 & r_1(-1 + \cos(\theta_o)) & r_1 \sin(\theta_o) & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; \\
336 \quad D_3 &= \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & r_1 \cos(\theta_o) \\ 0 & 1 & 0 & 0 & 0 & r_1 \sin(\theta_o) \\ 0 & 0 & 1 & -r_1 \cos(\theta_o) & -r_1 \sin(\theta_o) & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}; C_{SC1} \text{ and } C_{SC2}, \text{ which can be derived according to Eq. 40, stand for the}
\end{aligned}$$

compliance matrices of circular-curved beams 1# ($r = r_1$) and 2# ($r = r_1 + d$) shown in Fig. 16.

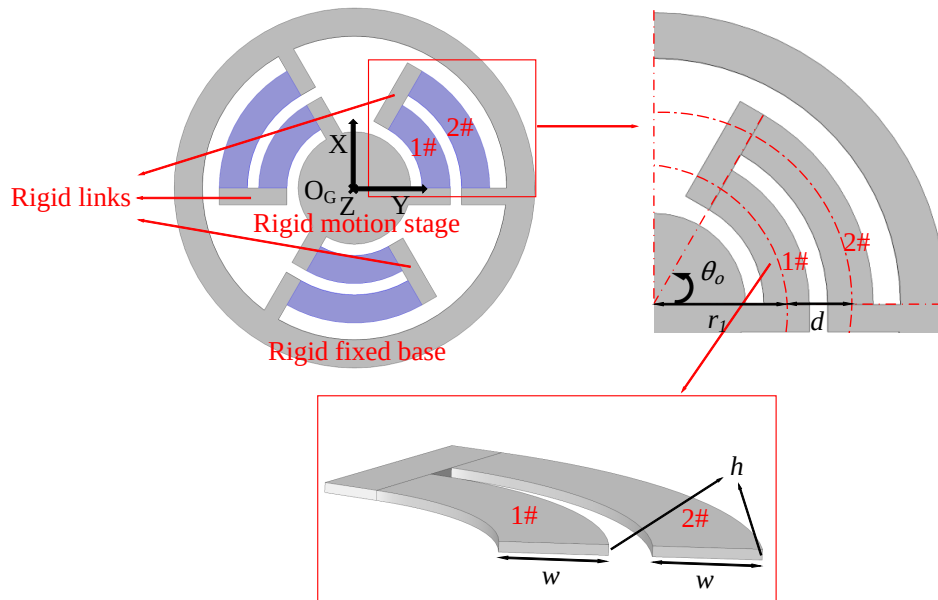


Fig. 16. Detailed geometric information of curved-beam-based Ortho-planar springs

Then, we finally arrive at the symbolic spatial compliance matrix C_{SG} of the Ortho-planar springs, which is structured in a diagonal manner (Eq. 42):

$$C_{SG} = \begin{bmatrix} c_{sg11} & 0 & 0 & 0 & 0 & 0 \\ 0 & c_{sg22} & 0 & 0 & 0 & 0 \\ 0 & 0 & c_{sg33} & 0 & 0 & 0 \\ 0 & 0 & 0 & c_{sg44} & 0 & 0 \\ 0 & 0 & 0 & 0 & c_{sg55} & 0 \\ 0 & 0 & 0 & 0 & 0 & c_{sg66} \end{bmatrix} \quad [42]$$

where $c_{sg11} \equiv c_{sg22}$ and $c_{sg44} \equiv c_{sg55}$. Similarly, its normalized compliance matrix C_{SG_n} can be formulated (see details in (21)) as follows for non-dimensional comparison (Eq. 43):

$$C_{SG_n} = \begin{bmatrix} c_{sgn11} & 0 & 0 & 0 & 0 & 0 \\ 0 & c_{sgn22} & 0 & 0 & 0 & 0 \\ 0 & 0 & c_{sgn33} & 0 & 0 & 0 \\ 0 & 0 & 0 & c_{sgn44} & 0 & 0 \\ 0 & 0 & 0 & 0 & c_{sgn55} & 0 \\ 0 & 0 & 0 & 0 & 0 & c_{sgn66} \end{bmatrix} = \begin{bmatrix} \frac{c_{sg11}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{c_{sg22}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{c_{sg33}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{c_{sg44}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{c_{sg55}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{c_{sg66}}{(2r_1+2d)^3} \frac{1}{EI_{m_z}} \end{bmatrix} \quad [43]$$

where we logically have $c_{sgn11} \equiv c_{sgn22}$ and $c_{sgn44} \equiv c_{sgn55}$ and $2r_1 + 2d$ is the characteristic length of the spring.

B.2. Geometric Optimization Strategy. As illustrated in Fig. 16, all the geometric parameters (r_1, θ_o, d, h and w), which can completely determine the geometric shape of the mechanism, are chosen to be studied for further mechanism optimization, in which position space concept is extended and not limited to positional parameters. The rest material properties are assigned in (44):

$$\begin{aligned} E &= 200 \times 10^9 \text{ Pa} \\ \nu &= 0.3 \end{aligned} \quad [44]$$

Logically, all elements in C_{SG_n} are the functions of the studied five parameters: r_1, θ_o, d, h and w , depending on which the process of improving the performance of the mechanism is logically deduced into a multi-variable (r_1, θ_o, d, h and w) and multi-objective (maximizing $\frac{c_{sgn33}}{c_{sgn22}}, \frac{c_{sgn44}}{c_{sgn66}}, \frac{c_{sgn44}}{c_{sgn22}}$ and $\frac{c_{sgn33}}{c_{sgn66}}$) optimization problem. c_{sgn33} and c_{sgn44} (and c_{sgn55}) denote the translational compliance in Z direction and rotational compliance around X (Y) axis respectively while c_{sgn22} (and c_{sgn11}) and c_{sgn66} stand for the translational compliance in Y (X) direction and rotational compliance around Z axis. Therefore, by maximizing $\frac{c_{sgn33}}{c_{sgn22}}, \frac{c_{sgn44}}{c_{sgn66}}, \frac{c_{sgn44}}{c_{sgn22}}$ and $\frac{c_{sgn33}}{c_{sgn66}}$ via Weighted-Sum Method (44), we aim to optimize the circular-beam-based Ortho-planar spring into a 2R1T (two rotational DOF and one translational DOF) compliant joint:

$$\begin{aligned} \max \quad & Z(r_1, \theta_o, d, h, w) = \epsilon_1 \frac{c_{sgn33}}{c_{sgn22}} + \epsilon_2 \frac{c_{sgn44}}{c_{sgn66}} + \epsilon_3 \frac{c_{sgn44}}{c_{sgn22}} + \epsilon_4 \frac{c_{sgn33}}{c_{sgn66}} \\ \text{s.t.} \quad & 0.010 \text{ m} \leq r_1 \leq 0.020 \text{ m} \\ & \pi/3 \leq \theta_o \leq 5\pi/9 \\ & 0 \text{ m} \leq d \leq 0.020 \text{ m} \\ & 0.0005 \text{ m} \leq h \leq 0.001 \text{ m} \\ & 0.001 \text{ m} \leq w \leq 0.003 \text{ m} \\ & r_1 + d \leq 0.020 \text{ m} \\ & d - w \geq 0.001 \text{ m} \\ & w - h \geq 0 \text{ m} \end{aligned}$$

where $\epsilon_1, \epsilon_2, \epsilon_3$ and ϵ_4 are the weights of each single-optimized target respectively satisfying $\epsilon_1 + \epsilon_2 + \epsilon_3 + \epsilon_4 = 1$; $Z(r_1, \theta_o, d, h, w)$ is the objective function; Considering the weight of each objective, $\epsilon_1, \epsilon_2, \epsilon_3$ and ϵ_4 are all set as $1/4$. The built-in Genetic Algorithm in MATLAB is used to obtain the globally optimal results with the following key parameters assigned: the population size is set up as 50; the number of maximum stall generations is assigned to 100; the random numbers generated within the bounds of the mentioned five variables are chosen as the initial population.

B.3. Globally Optimal Results with FEA Verification. The globally optimal result is listed in (45) with the corresponding consequent normalized compliance information obtained from the analytical models and FEA verification displayed in Table. 8 and the optimal geometric shape shown in Fig. 17a. According to Table. 8, the analytical results are verified by FEA results with maximum error being 11.29%. The values of $\frac{c_{sgn33}}{c_{sgn22}}, \frac{c_{sgn44}}{c_{sgn66}}, \frac{c_{sgn44}}{c_{sgn22}}$ and $\frac{c_{sgn33}}{c_{sgn66}}$ are up to around 200, 500, 1500 and 55 respectively, which implies that the optimal mechanism presents translational DOF in Z direction and rotational DOF around X and Y axes whereas it is translationally constrained in X and Y directions and rotationally constrained around Z axis. Therefore, the optimal circular-curved-beam-based Ortho-planar spring can serve as an ideal 2R1T compliant joint for many mechanical applications, such as continuum robots, rotational joints and springs.

* Globally Optimal Result

$$r_1 = 0.016 \text{ m}; \theta_o = \frac{\pi}{2}; d = 0.004 \text{ m}; h = 0.0005 \text{ m}; w = 0.003 \text{ m} \quad [45]$$

In the FEA, the boundary conditions were set up in the same manner of the analytical model where the compliance reference point of whole mechanism C_{SG} at O_G (Fig. 16) was evaluated (Fig. 17b): the motion stage and 3 links were set up as rigid bodies in COMSOL while the rest 6 compliant beams were set as deformable bodies (Fig. 17b); swept mapped meshes were used with the maximum and minimal mesh sizes being 0.02 mm and 2 mm respectively; the relative tolerance of the convergence error was set as 0.001 by default; only small deformations were considered so geometric non-linearity function was not activated; the geometric and material parameters were chosen from (44) and (45) respectively.

Table 8. Comparison between analytical results and FEA (without considering geometric non-linearity) results regarding the globally optimal Ortho-planar spring

Results	$c_{sgn,11}=c_{sgn,22}$	$c_{sgn,33}$	$c_{sgn,44}=c_{sgn,55}$	$c_{sgn,66}$	$\frac{c_{sgn,33}}{c_{sgn,22}}$	$\frac{c_{sgn,44}}{c_{sgn,66}}$	$\frac{c_{sgn,44}}{c_{sgn,22}}$	$\frac{c_{sgn,33}}{c_{sgn,66}}$
AM	3.4210×10^{-3}	6.4761×10^{-1}	5.4717×10^0	1.0973×10^{-2}	1.8930×10^2	4.9864×10^2	1.5994×10^3	5.9018×10^1
FEA	3.6094×10^{-3}	6.1393×10^{-1}	5.3395×10^0	1.1661×10^{-2}	1.7009×10^2	4.5789×10^2	1.4793×10^3	5.3149×10^1
ER	5.21%	5.48%	2.47%	5.90%	11.29%	8.90%	8.12%	11.04%

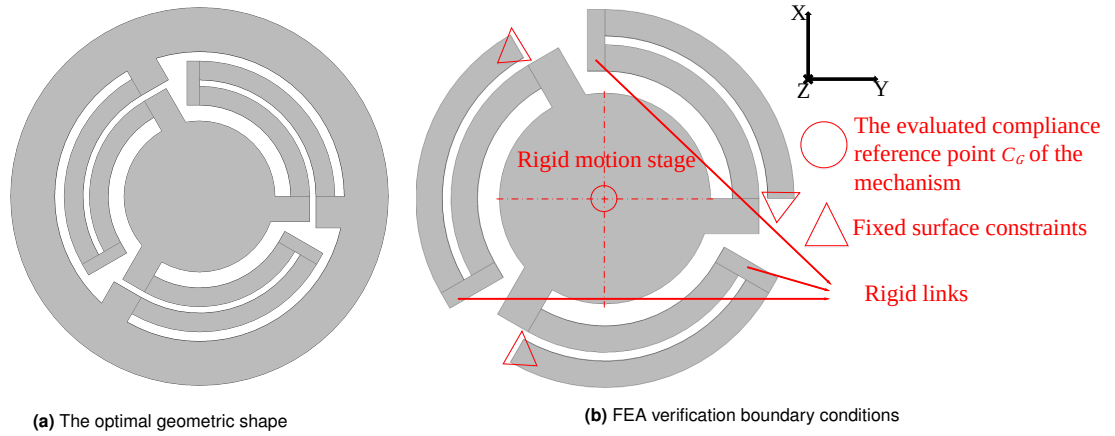


Fig. 17. The optimal circular-curved-beam-based Ortho-planar Spring

5. Conclusions

ICBs are good alternatives for mechanism synthesis as they provide many more diverse properties than straight flexible members. To fast synthesize ICB-based compliant mechanisms using screw theory, this paper proposed an efficient spatial compliance analysis method of general ICBs, by which the spatial compliance analysis of different types of ICBs (such as varying-curvature beams and varying-cross-section beams) was conducted, followed by Finite Element Analysis (FEA) verification. Next, the modeling and optimization of two types of CMs including ICB-based parallelogram mechanisms and ICB-based Ortho-planar springs were carried out under the concept of position space and parameter normalization strategy where a class of anti-buckling translational parallelograms with high load-bearing capacity and a type of compact 2R1T (2 rotational DOF and 1 translational DOF) compliant kinematic joints were obtained. Our future work will first include experimental testing of these proposed mechanisms. Then, the analysis of ICB-based mechanism in large-deformation situations will be conducted as this is what ICBs can stand out among other elementary flexible members. Third, we will promote and improve the used optimization strategy in nonlinear numerical problems.

1. Howell LL (2013) *Compliant mechanisms in 21st century kinematics*. (Springer, London).
2. Lobontiu N (2020) *Compliant mechanisms: design of flexure hinges*. (CRC press, Boca Raton).
3. Farhadi Machekposhti D, Tolou N, Herder J (2015) A review on compliant joints and rigid-body constant velocity universal joints toward the design of compliant homokinetic couplings. *Journal of Mechanical Design* 137(3).
4. Li H, Hao G, Kavanagh RC (2016) Position-space-based compliant mechanism reconfiguration approach and its application in the reduction of parasitic motion. *Journal of Mechanical Design* 138(9).
5. Fan S, Liu H, Fan D (2018) Design and development of a novel monolithic compliant xy stage with centimeter travel range and high payload capacity. *Mechanical Sciences* 9(1):161.
6. Hao G, Kong X (2012) A novel large-range xy compliant parallel manipulator with enhanced out-of-plane stiffness. *Journal of Mechanical Design* 134(6).
7. Cao L, Dolovich AT, Zhang WC (2015) Hybrid compliant mechanism design using a mixed mesh of flexure hinge elements and beam elements through topology optimization. *Journal of Mechanical Design* 137(9).
8. Li H, Hao G (2018) Position-space-based design of a symmetric spatial translational compliant mechanism for micro-/nano-manipulation. *Micromachines* 9(4):189.
9. Gräser P, Linß S, Zentner L, Theska R (2017) On the influence of the flexure hinge orientation in planar compliant mechanisms for ultra-precision applications in *Proc. of the 59th International Scientific Colloquium, 59th Ilmenau Scientific Colloquium, Ilmenau, Germany*. pp. 1–10.
10. Dong X, Raffles M, Guzman SC, Axinte D, Kell J (2014) Design and analysis of a family of snake arm robots connected by compliant joints. *Mechanism and Machine Theory* 77:73–91.
11. Palmieri G, Palpacelli M, Callegari M (2012) Study of a fully compliant u-joint designed for minirobotics applications. *Journal of mechanical design* 134(11).
12. Tanik ÇM, Parlaktaş V, Tanik E, Kadioğlu S (2015) Steel compliant cardan universal joint. *Mechanism and Machine Theory* 92:171–183.
13. Tanik E, Parlaktaş V (2012) Compliant cardan universal joint. *Journal of mechanical design* 134(2).
14. Hao G, Li H, He X, Kong X (2014) Conceptual design of compliant translational joints for high-precision applications. *Frontiers of Mechanical Engineering* 9(4):331–343.
15. Wu K, Hao G (2020) Design and nonlinear modeling of a novel planar compliant parallelogram mechanism with general tensural-compressural beams. *Mechanism and Machine Theory* 152:1–23.
16. Song MG, et al. (2010) Development of small sized actuator with compliant mechanism for optical image stabilization. *IEEE Transactions on Magnetics* 46(6):2369–2372.
17. Abdalla M, Frecker M, Gürdal Z, Johnson T, Lindner DK (2005) Design of a piezoelectric actuator and compliant mechanism combination for maximum energy efficiency. *Smart materials and structures* 14(6):1421.
18. Tantawat T, Li Z, Kota S (2004) Application of compliant mechanisms to active vibration isolation systems in *ASME 2004 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*. (American Society of Mechanical Engineers Digital Collection), pp. 1165–1172.
19. Trease B, Kota S (2009) Design of adaptive and controllable compliant systems with embedded actuators and sensors. *Journal of Mechanical Design* 131(11).
20. Krishnan G, Ananthasuresh G (2008) Evaluation and design of displacement-amplifying compliant mechanisms for sensor applications. *Journal of Mechanical Design* 130(10).
21. Hao G, Kong X (2013) A normalization-based approach to the mobility analysis of spatial compliant multi-beam modules. *Mechanism and Machine Theory* 59:1–19.
22. Rai AK, Saxena A, Mankame ND (2007) Synthesis of path generating compliant mechanisms using initially curved frame elements. *Journal of Mechanical Design* 129(10):1056–1063.
23. Qiu J, Lang JH, Slocum AH (2004) A curved-beam bistable mechanism. *Journal of microelectromechanical systems* 13(2):137–146.
24. Gerson Y, Krylov S, Ilic B, Schreiber D (2008) Large displacement low voltage multistable micro actuator in *2008 IEEE 21st International Conference on Micro Electro Mechanical Systems*. (IEEE), pp. 463–466.
25. Han JS, Müller C, Wallrabe U, Korvink JG (2007) Design, simulation, and fabrication of a quadstable monolithic mechanism with x-and y-directional bistable curved beams. *Journal of Microelectromechanical Systems* 19(2):1–6.
26. Pham HT, Wang DA (2011) A constant-force bistable mechanism for force regulation and overload protection. *Mechanism and Machine Theory* 46:899–909.
27. Edwards BT, Jensen BD, Howell LL (1999) A pseudo-rigid-body model for functionally binary pinned-pinned segments used in compliant mechanisms in *Proceedings of the 1999 ASME Design Engineering Technical Conferences*.
28. Wang N, Zhang Z, Yue F, Zhang X (2019) Exploration of translational joint design using corrugated flexure units with bézier curve segments. *Journal of Mechanical Design* 141(5).
29. Ahuett-Garza H, Chaides O, Garcia PN, Urbina P (2014) Studies about the use of semicircular beams as hinges in large deflection planar compliant mechanisms. *Precision Engineering* 38(4):711–727.
30. Rad FP, Veretchy R, Berselli G, Parenti-Castelli V (2016) Analytical compliance analysis and finite element verification of spherical flexure hinges for spatial compliant mechanisms. *Mechanism and Machine Theory* 101:168–180.
31. Parvari Rad F (2014) Ph.D. thesis (University of Bologna).
32. Berselli G, Rad FP, Veretchy R, Castelli VP (2013) Comparative evaluation of straight and curved beam flexures for selectively compliant mechanisms in *2013 IEEE/ASME International Conference on Advanced Intelligent Mechatronics*. (IEEE), pp. 1761–1766.

33. Wang N, Zhang Z, Zhang X, Cui C (2018) Optimization of a 2-dof micro-positioning stage using corrugated flexure units. Mechanism and Machine Theory 121:683–696.
34. Parise JJ, Howell LL, Magleby SP (2001) Ortho-planar linear-motion springs. Mechanism and machine theory 36:1281–1299.
35. Ghuku S, Saha KN (2018) Large deflection analysis of curved beam problem with varying curvature and moving boundaries. Engineering Science and Technology, an International Journal 21(3):408–420.
36. Fan Z, et al. (2017) Post-buckling analysis of curved beams. Journal of Applied Mechanics 84(3).
37. Jafari M, Mahjoob M (2010) An exact three-dimensional beam element with nonuniform cross section. Journal of applied mechanics 77(6).
38. Venkiteswaran VK, Su HJ (2016) Pseudo-rigid-body models for circular beams under combined tip loads. Mechanism and Machine Theory 106:80–93.
39. Kalpathy Venkiteswaran V, Su HJ (2017) Pseudo-rigid-body models of initially-curved and straight beams for designing compliant mechanisms in International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. (American Society of Mechanical Engineers), Vol. 5A.
40. Wang N, Liang X, Zhang X (2014) Pseudo-rigid-body model for corrugated cantilever beam used in compliant mechanisms. Chinese Journal of Mechanical Engineering 27(1):122–129.
41. Awtar S, Sen S (2010) A generalized constraint model for two-dimensional beam flexures: Nonlinear strain energy formulation. Journal of mechanical Design 132(8).
42. Chen G, Ma F, Hao G, Zhu W (2019) Modeling large deflections of initially curved beams in compliant mechanisms using chained beam constraint model. Journal of Mechanisms and Robotics 11(1).
43. Ling M, Howell LL, Cao J, Chen G (2020) Kinetostatic and dynamic modeling of flexure-based compliant mechanisms: a survey. Applied Mechanics Reviews 72(3).
44. Deb K (2014) Multi-objective optimization in Search methodologies. (Springer), pp. 403–449.
45. Swokowski EW (1979) Calculus with analytic geometry. (Taylor & Francis).
46. Young WC, Budynas RG, Sadegh AM, et al. (2002) Roark's formulas for stress and strain. (McGraw-Hill, New York) Vol. 7.
47. Chen G, Howell LL (2009) Two general solutions of torsional compliance for variable rectangular cross-section hinges in compliant mechanisms. Precision Engineering 33(3):268–274.
48. Li S, Hao G, Wright WM (2021) Design and modelling of an anti-buckling compliant universal joint with a compact configuration. Mechanism and Machine Theory 156:104–162.
49. Qiu C, Qi P, Liu H, Althoefer K, Dai JS (2014) Six dimensional compliance analysis of ortho-planar springs for a continuum manipulator in International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. (American Society of Mechanical Engineers), Vol. 138, p. 51.
50. Hao G (2017) Design and analysis of symmetric and compact 2r1t (in-plane 3-dof) flexure parallel mechanisms. Mechanical Sciences 8(1):1–9.
51. Hao G, Yu J, Liu Y (2018) Compliance synthesis of a class of planar compliant parallelogram mechanisms using the position space concept in 2018 International Conference on Reconfigurable Mechanisms and Robots (ReMAR). (IEEE), pp. 1–10.
52. Awtar S, Shimotsu K, Sen S (2010) Elastic averaging in flexure mechanisms: A three-beam parallelogram flexure case study. Journal of Mechanisms and Robotics 2(4).
53. Awtar S, Slocum AH (2005) Closed-form nonlinear analysis of beam-based flexure modules in ASME 2005 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. (American Society of Mechanical Engineers Digital Collection), pp. 101–110.
54. Awtar S, Slocum AH, Seviner E (2007) Characteristics of beam-based flexure modules. Journal of Mechanical Design 129(6).
55. Valentini PP, Pezzuti E (2016) Computer-aided tolerance allocation of compliant ortho-planar spring mechanism. International Journal of Computer Applications in Technology 53(4):369–374.
56. Smal O, et al. (2008) Modelling, characterization and testing of an ortho-planar micro-valve. Journal of Micro-Nano Mechatronics 4(3):131–143.
57. Kristanto H, et al. (2019) Development of a 3-axis human fingertip tactile sensor with an ortho-planar spring in 2019 IEEE International Conference on Robotics and Biomimetics (ROBIO). (IEEE), pp. 297–302.
58. Konstantinova J, Stilli A, Althoefer K (2017) Fingertip fiber optical tactile array with two-level spring structure. Sensors 17(10):2337.
59. Ataollahi A, Fallah AS, Seneviratne LD, Dasgupta P, Althoefer K (2012) Novel force sensing approach employing prismatic-tip optical fiber inside an orthoplanar spring structure. IEEE/ASME Transactions on Mechatronics 19(1):121–130.
60. Lusk CP (2005) Ph.D. thesis (Brigham Young University).
61. Qi P, Liu H, Seneviratne L, Althoefer K (2015) Design, kinematics and prototype of a flexible robot arm with planar springs in International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. (American Society of Mechanical Engineers).
62. Qi P, et al. (2015) A novel continuum manipulator design using serially connected double-layer planar springs. IEEE/ASME Transactions on Mechatronics 21(3):1281–1292.
63. Qi P, et al. (2014) A novel continuum-style robot with multilayer compliant modules in 2014 IEEE/RSJ International Conference on Intelligent Robots and Systems. (IEEE), pp. 3175–3180.