

Title	Assessment of performance of the industrial process of bulk vacuum packaging of raw meat with nondestructive optical oxygen sensing systems
Authors	Kelly, Caroline;Cruz-Romero, Malco C.;Kerry, Joseph P.;Papkovsky, Dmitri B.
Original Citation	Kelly, C., Cruz-Romero, M., Kerry, J. and Papkovsky, D. (2018) 'Assessment of performance of the industrial process of bulk vacuum packaging of raw meat with nondestructive optical oxygen sensing systems', Sensors, 18(5), 1395 (10pp). doi: 10.3390/s18051395
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://www.mdpi.com/1424-8220/18/5/1395 - 10.3390/s18051395
Rights	© 2018, the Authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/). - http://creativecommons.org/licenses/by/4.0/
Download date	2024-05-14 13:29:59
Item downloaded from	https://hdl.handle.net/10468/6232




UCC

University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Supplementary Information

A.

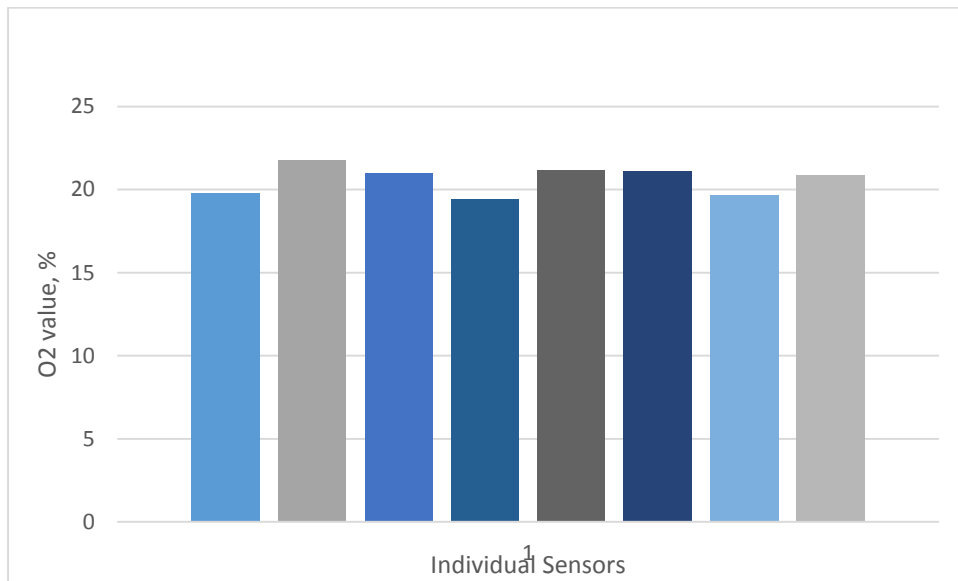

B.

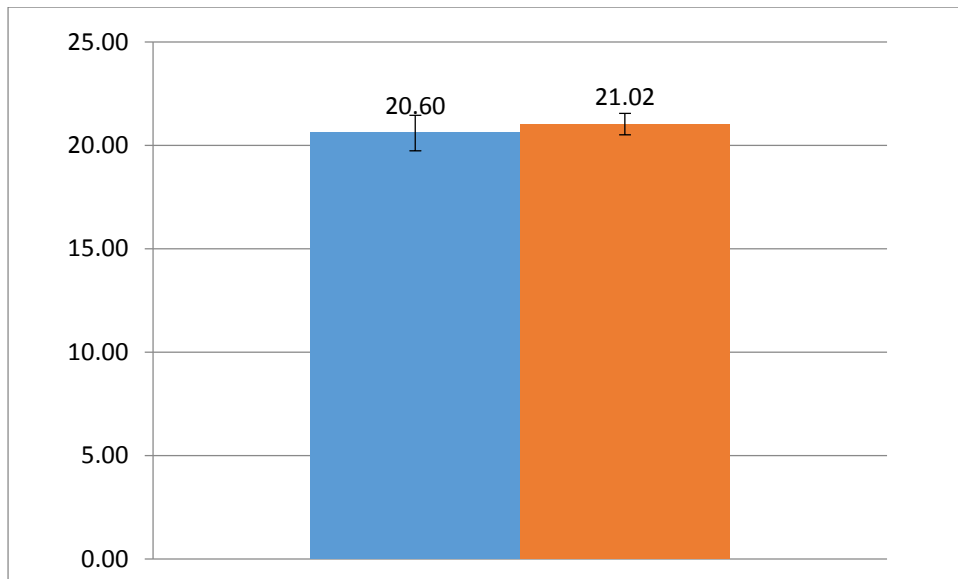


Figure S1. Measurement of O₂ with Optech sensors at 1 °C. (A) Readings from 8 individual sensors under standard experimental conditions (1 °C, 20.86% O₂) produced with an Optech-O₂ Platinum reader calibrated with CalCard at 1 °C. (B) O₂ readings from the same sensors measured at 1°C (blue bar) and 22 °C (orange bar). Mean O₂ values are 20.6 ± 0.8 and 21.0 ± 0.5 , respectively. Calculated p-value of 0.12 shows that the difference is not significant ($p > 0.05$, N = 8). Temperature readings at 1 °C were 1.7 ± 1.0 °C, and at 22 °C 22.0 ± 0.1 °C.