
CORA Cork Open Research Archive
Cartlann Taighde Oscailte Chorcaí

Title	Assessment of performance of the industrial process of bulk vacuum packaging of raw meat with nondestructive optical oxygen sensing systems
Authors	Kelly, Caroline;Cruz-Romero, Malco C.;Kerry, Joseph P.;Papkovsky, Dmitri B.
Publication date	2018
Original Citation	Kelly, C., Cruz-Romero, M., Kerry, J. and Papkovsky, D. (2018) 'Assessment of performance of the industrial process of bulk vacuum packaging of raw meat with nondestructive optical oxygen sensing systems', Sensors, 18(5), 1395 (10pp). doi: 10.3390/s18051395
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://www.mdpi.com/1424-8220/18/5/1395 - 10.3390/s18051395
Rights	© 2018, the Authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/). - http://creativecommons.org/licenses/by/4.0/
Download date	2026-10-30 03:54:27
Item downloaded from	https://hdl.handle.net/10468/6232

UCC
University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Supplementary Information

A.

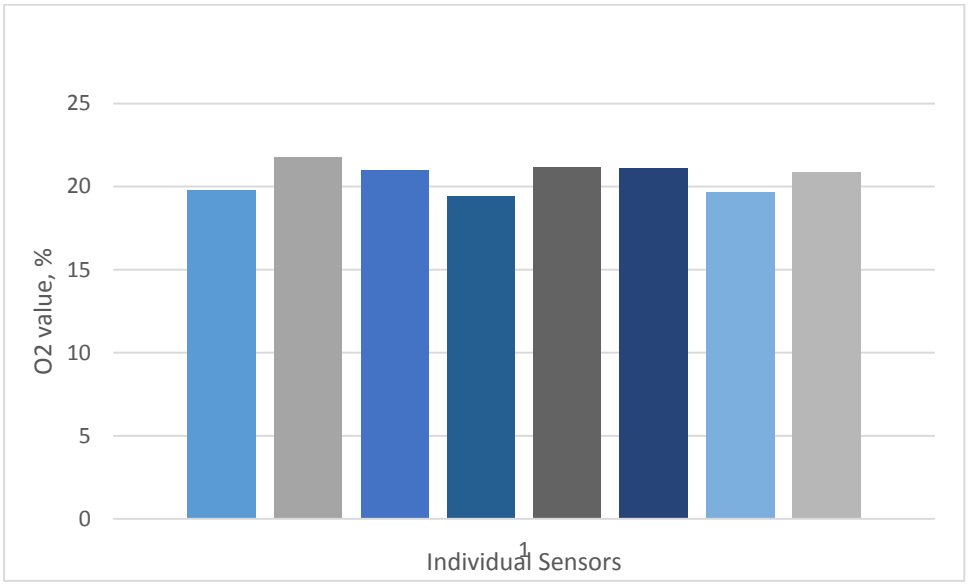

B.

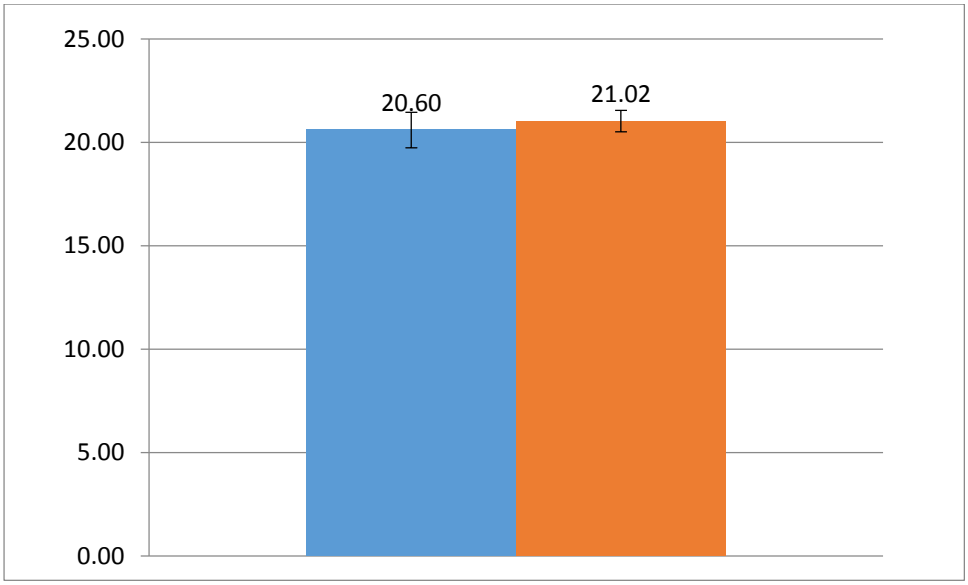


Figure S1. Measurement of O_2 with Optech sensors at 1 °C. (**A**) Readings from 8 individual sensors under standard experimental conditions (1 °C, 20.86% O_2) produced with an Optech-O_2 Platinum reader calibrated with CalCard at 1 °C. (B) O_2 readings from the same sensors measured at 1°C (blue bar) and 22 °C (orange bar). Mean O_2 values are 20.6 ± 0.8 and 21.0 ± 0.5, respectively. Calculated p-value of 0.12 shows that the difference is not significant (p > 0.05, N = 8). Temperature readings at 1 °C were 1.7 ± 1.0 °C, and at 22 °C–22.0 ± 0.1 °C.