

Title	WIMU instrumentation of assassin trainer & skeleton sled
Authors	Gaffney, Mark;Colyer, Steffi;Walsh, Michael;Drawer, Scott;Salo, Aki;O'Flynn, Brendan;Ó Mathúna, S. Cian
Publication date	2012-07
Original Citation	GAFFNEY, M., COLYER, S., WALSH, M., DRAWER, S., SALO, A., O'FLYNN, B. & Ó MATHÚNA, S. C. 2012. WIMU instrumentation of skeleton "ASSASSIN" trainer and sled. In: "Engineering of Sports 9: ISEA's 9th International Sports Engineering Conference". Lowell, Massachusetts, United States. 9-13 July 2012.
Type of publication	Conference item
Link to publisher's version	http://continuinged.uml.edu/isea2012/default.htm
Download date	2024-06-18 15:14:29
Item downloaded from	https://hdl.handle.net/10468/973

¹Clarity Centre for Sensor Web Technologies, Tyndall National Institute; ²University of Bath; ³UK Sports Council

SKELETON

Winter Olympic Sled Sport
1km+ Downhill Ice Course
High Speeds (140km/h)
Large Accelerations (5g)
Fractions of Second Crucial!



Pushing

THE "START"

20-30m Pushing & Loading
Complex Explosive Motion
Critical to Performance
Not Well Studied
Room for Improvement?



Loading


COLLABORATION

Tyndall's Sensor Expertise
University of Bath Facilities
UK Sport Access to Athletes
Olympic Athletes & Trainers
Investigate Start Period & Training
Improve Athlete Performance?



WHAT IS A WIMU?

Multi-Range Sensors (Inertial & magnetic)

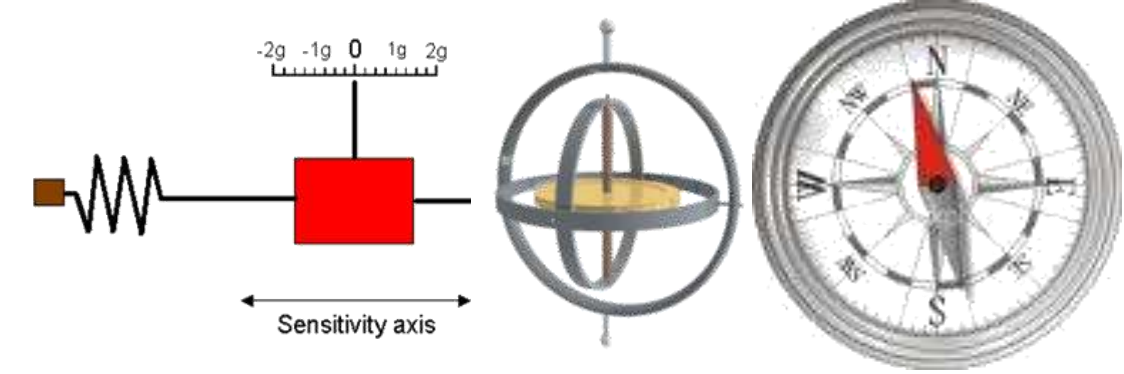

Tyndall WIMU v3



Wireless (802.15.4)



Processing (Atmega)

Battery (Li-Ion)



Smart Firmware (Tiny OS)

WIRELESS

INERTIAL

MEASUREMENT

UNIT

ASSASSIN START TRAINER

Training System for Sled Starts
Rolling Sled on Adjustable Incline
2-3 WIMUs on Sled Spars
Resistance Bands & Weights
2 Light-Gates for Basic Timing
37 Runs - Different Weights & Inclines




WIMU on Assassin

SKELETON TEST TRACK

Practice Track for Sled Start
Wheeled Sled on Metal Rails
4 WIMUs on Sled Corner Plates
Base-station Near Brow of Hill
13 Light-Gates for Accurate Timing
12 Runs - Different Step# & Push Type



WIMU on Skeleton

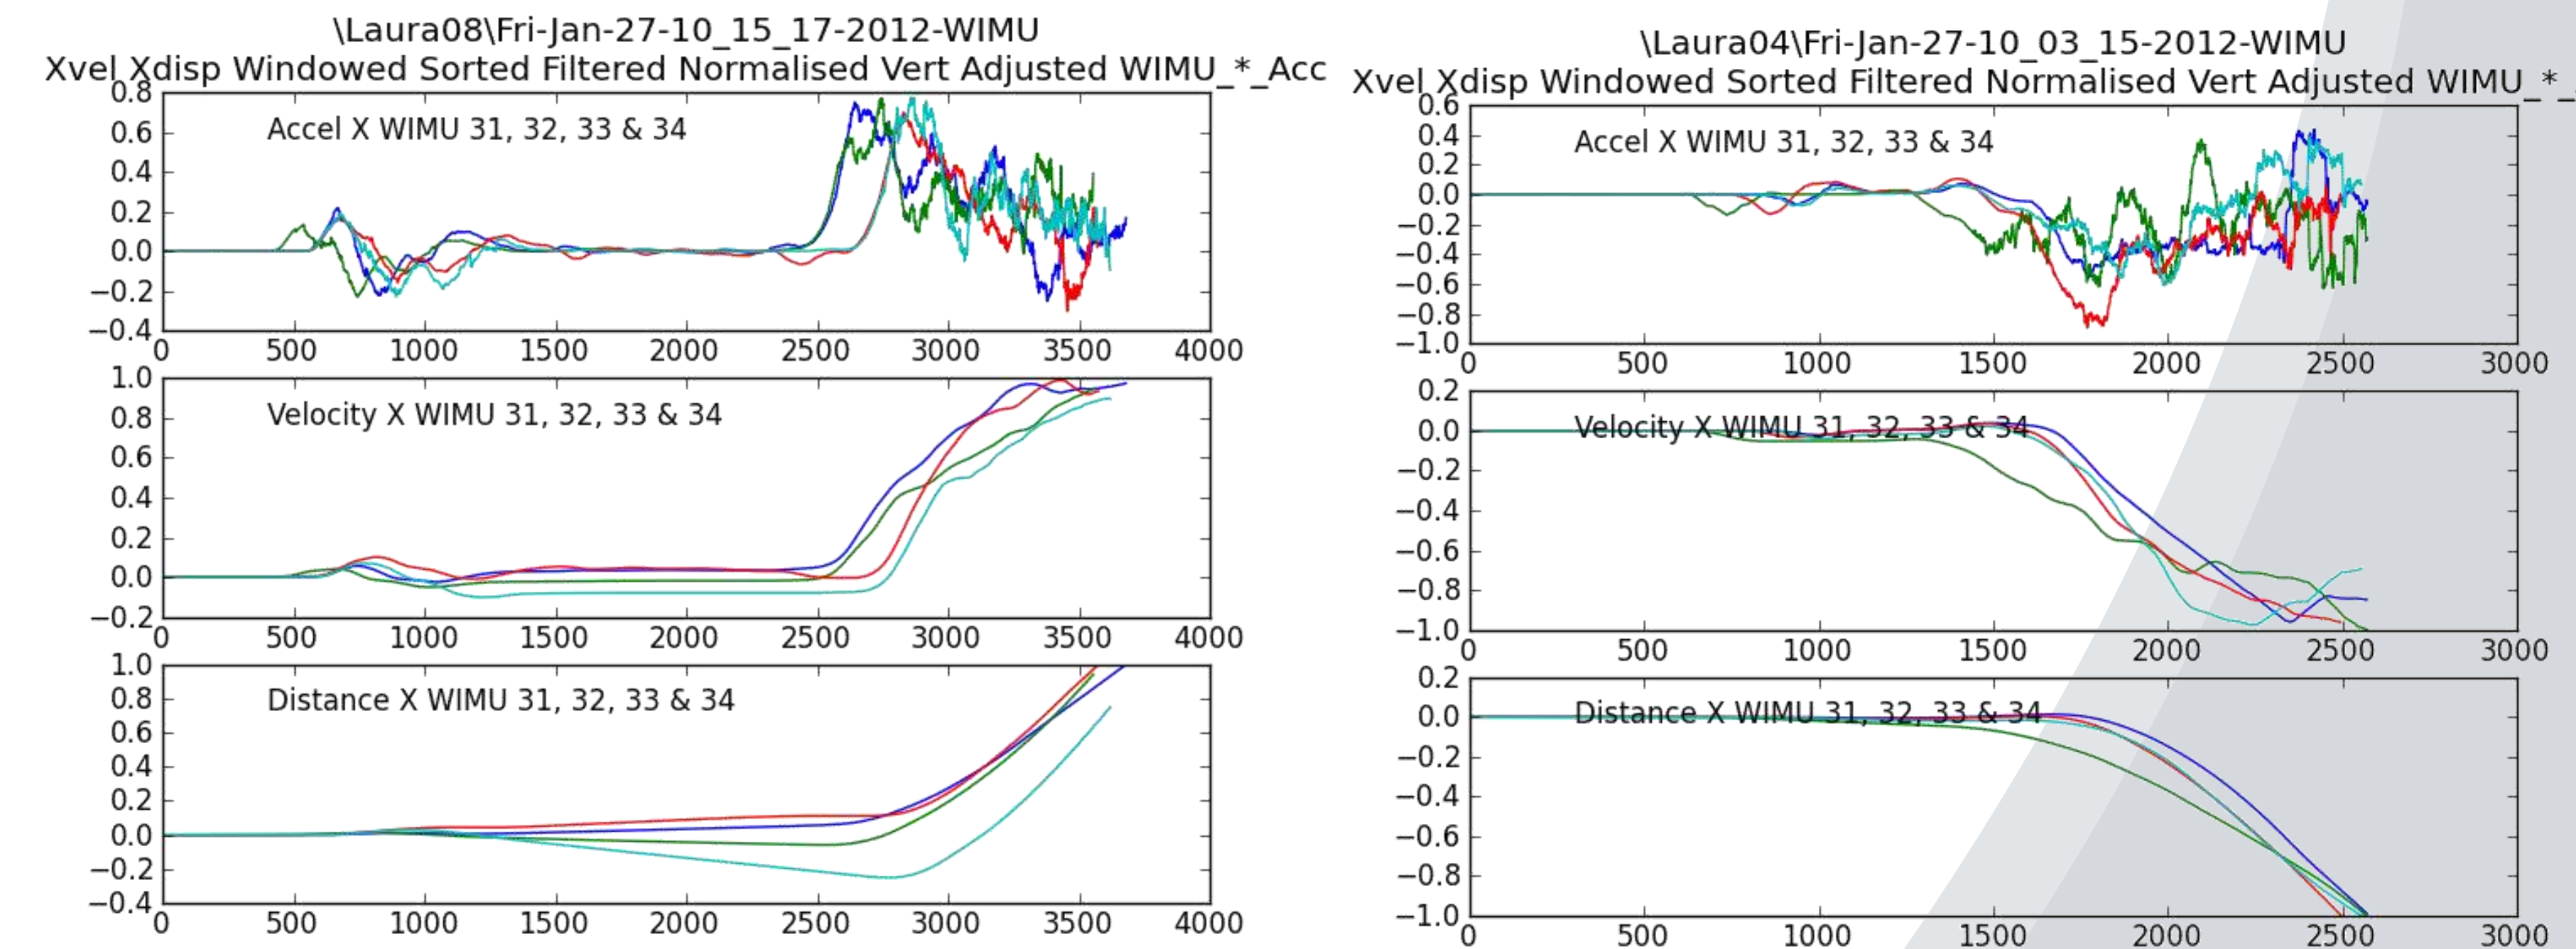

Skeleton Acceleration Data with Estimated Velocity & Displacement:
Left and Right Handed Pushing can be Distinguished


Sensor Type	Sensor Part	Range	Target	Assassin	Skeleton
Accelerometer	ADXL345	±16g	256Hz	257Hz/Axis	216Hz/Axis
Gyroscope	IDG/ISZ-650	±2000°/s	256Hz	263Hz/Axis	214Hz/Axis
Magnetometer	HM5843	±0.7Ga	50Hz	55Hz/Axis	42Hz/Axis
Combined Sensing Rate				3450Hz	5660Hz

OUTCOME

WIMU Data was successfully recorded for 34 Assassin & 11 Skeleton runs with average device sampling rates close to the target. System wide sensing rates were in 1000's of Hz. Slight decreases in performance were seen for the Skeleton track due to a more challenging RF environment. Additional light-gate based timing and video data are also available for many of these runs and are being used to validate the initial results. Algorithmic identification of individual step candidates & initial calculations of sled direction, velocity and distance look promising.

FUTURE

WIMU based systems hold great potential to aid & automate skeleton performance analysis and become part of training and coaching regimes for elite athletes. Future work will involve additional data recording, further instrumenting the athlete, analysing technique and focusing on post loading features. This will allow the Olympic level athletes involved to bring their training from the Lab to the track.

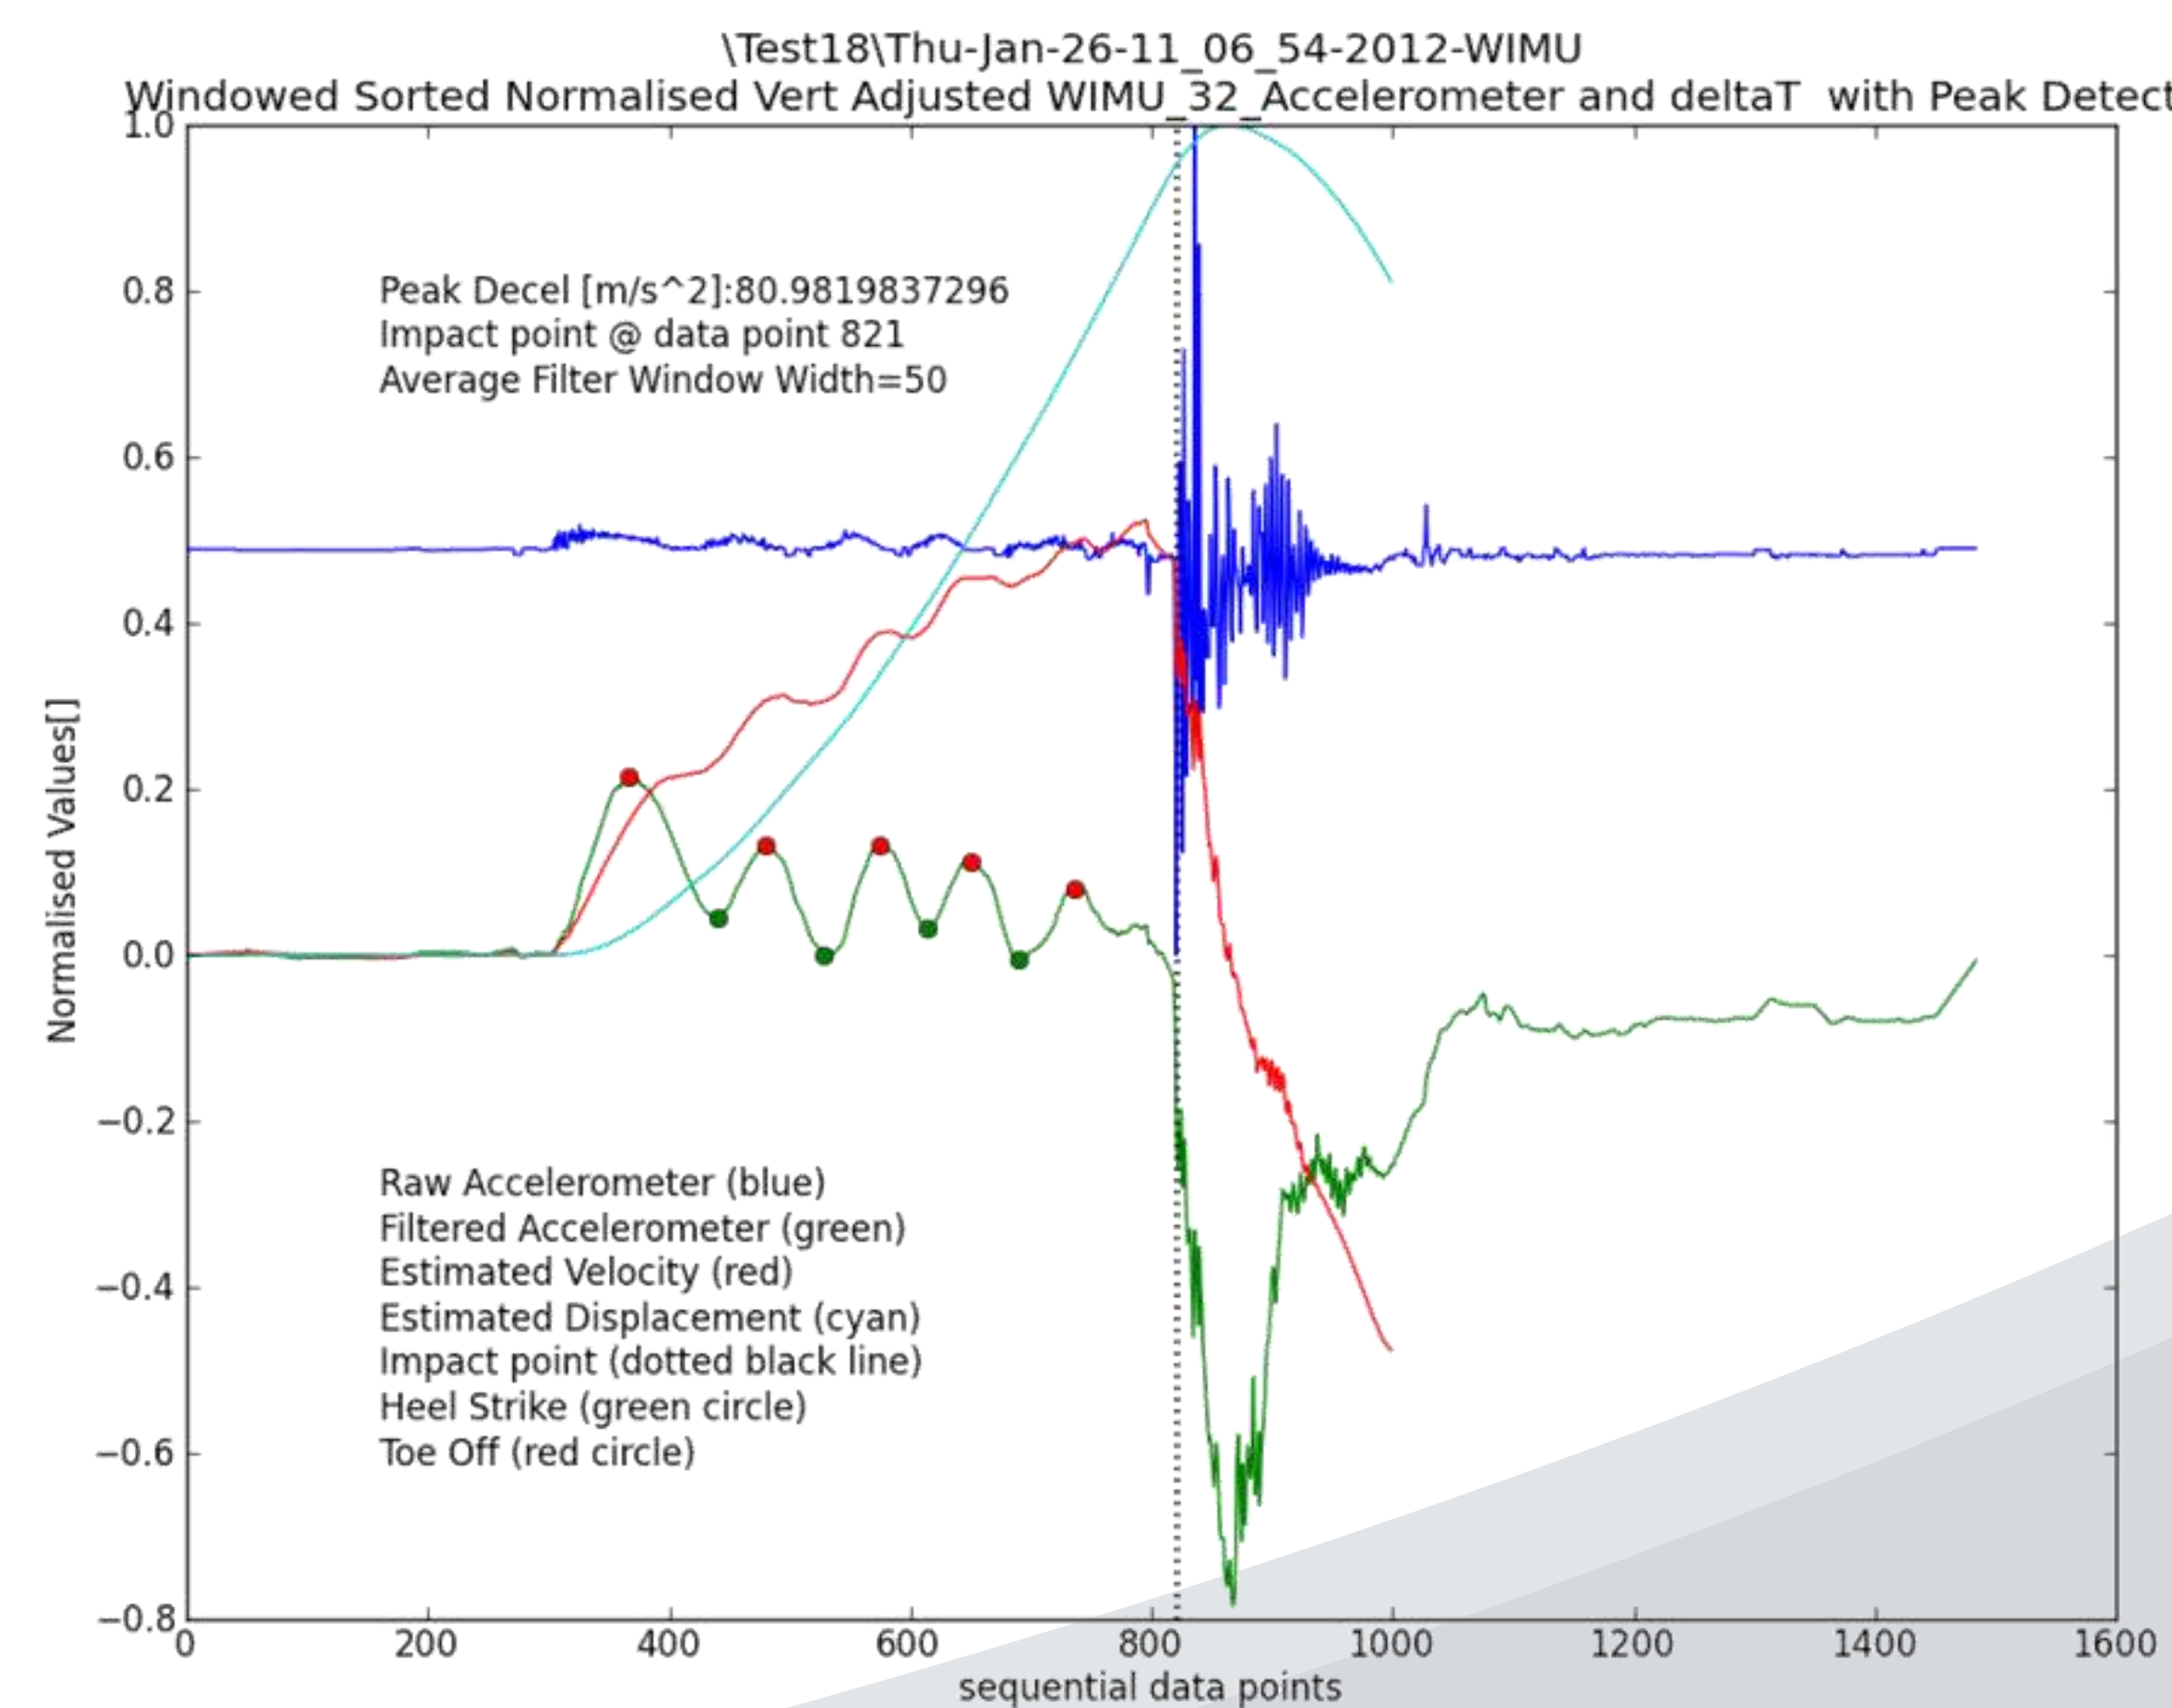

Assassin Data with Estimated Velocity & Displacement:
Step and Impact Events can be Identified