

Title	Optimization of surfactant addition in cellulosic ethanol process using integrated techno-economic and life cycle assessment for bioprocess design
Authors	Kadhun, Haider Jawad;Rajendran, Karthik;Murthy, Ganti S.
Publication date	2018-10-04
Original Citation	Kadhun, H. J., Rajendran, K. and Murthy, G. S. (2018) 'Optimization of surfactant addition in cellulosic ethanol process using integrated techno-economic and life cycle assessment for bioprocess design', ACS Sustainable Chemistry and Engineering, 6(11), pp. 13687-13695. doi:10.1021/acssuschemeng.8b00387
Type of publication	Article (peer-reviewed)
Link to publisher's version	10.1021/acssuschemeng.8b00387
Rights	© 2018, American Chemical Society. This document is the Accepted Manuscript version of a Published Work that appeared in final form in ACS Sustainable Chemistry and Engineering after technical editing by the publisher. To access the final edited and published work see https://pubs.acs.org/doi/abs/10.1021/acssuschemeng.8b00387
Download date	2025-05-14 04:49:51
Item downloaded from	https://hdl.handle.net/10468/7155



UCC

University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

Optimization of Surfactant Addition in Cellulosic Ethanol Process Using Integrated Techno-Economic and Life Cycle Assessment for Bioprocess Design

Haider Jawad Kadhum, Karthik Rajendran, and Ganti S. Murthy

ACS Sustainable Chem. Eng., **Just Accepted Manuscript** • DOI: 10.1021/
acsuschemeng.8b00387 • Publication Date (Web): 04 Oct 2018

Downloaded from <http://pubs.acs.org> on October 5, 2018

Just Accepted

“Just Accepted” manuscripts have been peer-reviewed and accepted for publication. They are posted online prior to technical editing, formatting for publication and author proofing. The American Chemical Society provides “Just Accepted” as a service to the research community to expedite the dissemination of scientific material as soon as possible after acceptance. “Just Accepted” manuscripts appear in full in PDF format accompanied by an HTML abstract. “Just Accepted” manuscripts have been fully peer reviewed, but should not be considered the official version of record. They are citable by the Digital Object Identifier (DOI®). “Just Accepted” is an optional service offered to authors. Therefore, the “Just Accepted” Web site may not include all articles that will be published in the journal. After a manuscript is technically edited and formatted, it will be removed from the “Just Accepted” Web site and published as an ASAP article. Note that technical editing may introduce minor changes to the manuscript text and/or graphics which could affect content, and all legal disclaimers and ethical guidelines that apply to the journal pertain. ACS cannot be held responsible for errors or consequences arising from the use of information contained in these “Just Accepted” manuscripts.



Optimization of Surfactant Addition in Cellulosic Ethanol Process Using

Integrated Techno-Economic and Life Cycle Assessment for Bioprocess Design

Haider Jawad Kadhum^{a,b,§}, Karthik Rajendran^{a,c,d,§}, Ganti S. Murthy^{a,*}

^a Department of Biological and Ecological Engineering, Oregon State University, Corvallis OR-97331, United States

^b College of Agriculture, Al-Qasim Green University, Babylon, Iraq

^c Environmental Research Institute, MaREI centre, University College Cork, Cork, Ireland

^d School of Engineering, University College Cork, Cork, Ireland

§ Both the authors had contributed equally to this manuscript

Emails: kadhumh@oregonstate.edu; karthik.1988@gmail.com, k.rajendran@ucc.ie; Ganti.Murthy@oregonstate.edu

*Corresponding author:

Ganti.Murthy@oregonstate.edu

Phone: +1 (541) 737 6291

Fax: +1 (541) 737 2082

Mailing address:

Haider Jawad Kadhum & Ganti S. Murthy

116, Gilmore Hall, Biological and Ecological Engineering

Oregon State University, Corvallis, OR-97331-6291

Karthik Rajendran

Environmental Research Institute, UCC

6 Lee Road, Cork, T23 XE10, Ireland

ORCID:

Ganti Murthy: [0000-0003-2774-9559](https://orcid.org/0000-0003-2774-9559)

Karthik Rajendran: [0000-0002-3638-4347](https://orcid.org/0000-0002-3638-4347)

Abstract

Surfactants have been demonstrated to be effective in increasing the cellulase enzyme efficacy and overall enzymatic hydrolysis efficiency. However, the impact of the surfactant addition on the economic viability and environmental impacts of the bioethanol process has not been well investigated. The objective of this study was to determine the economic and the environmental impacts of using five surfactant types, Polyethylene glycol (PEG) 3000, PEG 4000, PEG 6000, PEG 8000 and Tween 80, at various concentrations (8, 5, 2, 1, 0.75, 0.5, 0.25 and 0 % w/w) during enzymatic hydrolysis and fermentation of pretreated Banagrass. We used an integrated techno-economic and life cycle assesment to guide the selection of optimal surfactant concentration in the bioethanol process. Surfactants concentration of more than 2% negatively affects the profitability of ethanol even when there is a statistically significant increase in glucose and ethanol titers. Based on the overall performance indicators for final ethanol, economic viability and environmental impacts, the addition of PEG6000 at 2% (w/w) were determined to be the optimal option. Glucose and ethanol concentrations of 119.2 ± 5.4 g/L and 55.0 ± 5.8 g/L respectively with 81.5% cellulose conversion rate were observed for 2% (w/w) PEG6000. Techno-economic and Lifecycle analysis indicated that 2% w/w PEG6000 addition resulted in ROI of 3.29% and had reduced the global warming potential by 6 g CO₂/MJ ethanol produced.

Keywords: process design, techno-economic analysis, sustainable processes, life cycle assessments, biofuels, hydrolysis, fermentation, lignocellulose

Introduction

While every unit operation in the biofuel production processes has an impact on overall commercial viability, the enzymatic hydrolysis process is considered to be a bottleneck in the lignocellulosic bioprocessing¹. Non-productive binding of the enzyme is one of the challenges that limit enzyme productivity and reduce cellulose hydrolysis². Polyethylene glycol (PEG) has been reported to enhance enzymatic hydrolysis of pretreated lignocellulosic feedstocks increasing hydrolysis and fermentation yields³⁻⁸. The possible mechanisms for enhancing enzymatic hydrolysis include (1) hydrophobic structure of surfactants form a coating around lignin thus preventing enzymes from adsorbing to lignin; (2) surfactants alter lignocellulose structure and enhance cellulose accessibility; (3) surfactants form reverse micelle that envelope enzymes and protect it from denaturing^{3, 9}. While different types of surfactants were investigated³⁻⁸ using different concentrations (0.5% - 5%), these studies were primarily focused on establishing technical feasibility of the process and did not include a systems perspective including the economic and environmental impacts of surfactants addition. Price of PEG, for instance, which varies between \$1800-2700/ton¹⁰ depending on the type of the PEG and its addition could have a significant impact on process economics.

Despite many technologies that are successful at the laboratory and pilot scale, many questions regarding their economic viability and environmental impacts are still unanswered and are being investigated¹¹. In fact, it is well known in the technology development and commercialization domains for novel technologies that only 1% of initial discovery projects end up as commercial process¹¹. It takes between 10-15 years of research to develop product/processes and commercialize. Between 75-95% of the patents filed do not generate

1
2
3 any income through royalties or licensing in industries¹²⁻¹³. This is due to various reasons such
4
5 as policies, incentives, market, environmental threats etc.
6
7

8 There is a critical need for a paradigm that considers technological, economic and
9
10 environmental impacts from the process of ideation to commercialization¹⁴. Techno-economic
11
12 (TEA) and life cycle assessment (LCA) are used to assess the technical feasibility, economic
13
14 viability and environmental impacts of a process when a technology is in the pilot or large scale.
15
16 These tools can be employed in a novel way to develop a paradigm that ensures consideration
17
18 of the above mentioned three factors early in the research cycle to identify bottlenecks to
19
20 commercialization and lower environmental impacts.
21
22
23

24
25 This paper focuses on determining the effect of surfactants on ethanol production in an
26
27 integrated TEA and LCA framework. The objectives of this work are as follows:
28
29

- 30 1. Study the effect of various surfactants at various concentrations on ethanol production
31
32 using lignocelluloses.
33
34
- 35 2. Assess the economic, and environmental impacts to determine the optimum
36
37 concentration of the surfactant.
38
39
40
41

42 **Methods**

43 **Materials**

44
45 *Feedstock:* Dilute acid pretreated Banagrass (*Pennisetum purpureum*) was obtained from a pilot
46
47 facility in Boardman, OR. Biomass was washed with 3X water on a weight basis and pH was
48
49 adjusted to 5.5 using NaOH. After pH adjustments, excess moisture was removed using hand
50
51 press and air dried until the moisture was 30% (W/W). Composition of biomass and other
52
53 process streams was determined using NREL protocols¹⁵⁻¹⁷. The cellulose content of pretreated
54
55
56
57
58
59
60

1
2
3 biomass was 60.1 % (w/w), and other sugars were <4%. Air dried Banagrass was stored at room
4
5 temperature until further use in all subsequent experiments.
6

7
8 *Chemicals:* For the first set of enzymatic hydrolysis experiments, surfactants namely, PEG 3000,
9
10 PEG 4000, PEG 6000, PEG 8000 and Tween 80 were used at four concentrations (0%, 2%, 5%,
11
12 and 8%). For the second set of experiments, PEG 6000 was used at five concentrations (0%
13
14 0.25%, 0.50%, 0.75% and 1.0%). A commercial cellulase enzyme mixture (Ctec2, Novozymes,
15
16 USA) was added at the rate of 20 mg protein/g glucan in a single dose¹⁸ at the beginning of the
17
18 experiments as per the manufacturer's recommendation. *Saccharomyces cerevisiae* (active dry
19
20 yeast BIO-FERM® XR) was added at the rate of 1.0 g/L to initiate fermentation process. Urea
21
22 (1.0g/L) was added as nitrogen source for the yeast, while tetracycline (400 µl/L from the stock
23
24 solution of 5mg in 70% ethanol) was added to limit any bacterial activity¹⁸.
25
26
27
28

29
30 *Software:* Intelligen SuperPro Designer (V 8.5) was used for simulating and analysing the
31
32 techno-economic feasibility while Open LCA (V 1.6.3) was used to calculate the environmental
33
34 impacts. The Ecoinvent database 3.1 was used to collect the inventory for conducting LCA, and
35
36 TRACI 2.1 was used as an impact assessment method¹⁹⁻²¹.
37
38
39

40 **Experimental design and process design tool description**

41
42 A literature review of various surfactants (PEG 3000, PEG 4000, PEG 6000, PEG 8000, and
43
44 Tween80) indicated that 5% was optimal for efficient ethanol production⁹. First set of
45
46 experiments were conducted based on the reported surfactant concentrations mentioned
47
48 above at 5±3% i.e., (2%, 5% and 8%) using dilute acid pretreated Banagrass. The experiments
49
50 involved a combination of enzymatic hydrolysis (glucose release) followed by fermentation for
51
52 ethanol production. All the experiments were conducted in triplicates and a control without any
53
54
55
56
57
58
59
60

1
2
3 surfactant was used in all experiments. In total 50 shake flasks (250 ml with a working volume
4
5 of 100 ml) were used for the first experiments in the combinations of 5 surfactants (PEG 3000,
6
7 PEG 4000, PEG 6000, PEG8000, and Tween 80) X 3 concentrations (2%, 5% and 8%) X 3
8
9 replicates + 5 controls (no surfactant) (S2:TableS2-S1). The enzymatic hydrolysis was carried out
10
11 for 96h followed by fermentation for 96h with periodic sampling. Enzymatic hydrolysis was
12
13 performed at 50°C, while fermentation was carried out at 30°C. The overall solids loading for
14
15 the batch experiments were maintained at 20%. At the beginning of the experiments, 10% of
16
17 solids were loaded and the remaining 10% was equally split into 3h intervals. Based on the
18
19 experimental data on glucose and ethanol yield, a statistical analysis was performed using
20
21 ANOVA-General Model to determine differences in final sugar and ethanol concentrations at
22
23 various surfactant type and concentrations. Based on the experimental results and the
24
25 statistical analysis, the selected type and concentrations of surfactant were used in further TEA
26
27 analysis (described in section 2.3 and 2.4) and LCA analysis (described in section 2.5) to
28
29 minimize the economic and environmental impacts associated with the surfactant addition. A
30
31 return on investment (ROI) was used as a parameter to compare the economics and the ROI
32
33 was noted.
34
35
36
37
38
39
40

41
42 To identify optimum concentration of the best surfactant identified in the first set of
43
44 experiments described above, a second set of experiments were performed at 0.25%, 0.50%,
45
46 0.75% and 1.0% concentrations. The operating conditions including temperatures for enzymatic
47
48 hydrolysis, fermentation, enzyme loading, solids loading, sampling frequency were same as in
49
50 first set of experiments, while the overall retention time of the process was reduced to 144h
51
52 compared to 192h in first experiment. After 72h of hydrolysis, active dry yeast was added to
53
54
55
56
57
58
59
60

1
2
3 initiate fermentation. The results from this experiment were input to the process model under
4
5 same conditions to calculate ROI. The ROI from the first run and as well the second run was
6
7 compared and analysed. Similarly, the LCA was performed on the best results yielding
8
9 experiment from the first experiments and all the trials in the second run (lower
10
11 concentrations). The TEA and LCA results for control experiments (no surfactant) were used as
12
13 the basis to compare the performance increases and a holistic understanding of the solids
14
15 loading and the type and concentration of surfactant needed to optimize cost and
16
17 environmental impacts. Incorporating TEA and LCA iteratively in the early stages of research to
18
19 identify hotspots will help the researchers to focus on the promising trends for the industries,
20
21 thus reducing the laboratory to commercialization cycle. An overview of decision-making tool
22
23 employed in this study is reported in Figure 1.
24
25
26
27
28
29

30 **Model development**

31
32 The techno-economic model was developed using Intelligen SuperPro Designer (V8.5) based on
33
34 NREL^{1, 18, 22-23}. All the models are attached as supplementary files (S1) to enhance transparency
35
36 and enable replication of the reported results. Banagrass produced in experimental field plots
37
38 in Maui, Hawaii was field dried and transported to the facility where it was stored in super
39
40 sacks for 10-30 days before further processing (S2:Figure S2-S1). The feedstock was washed
41
42 with recycled water to remove any dirt and ground using a knife mill. Banagrass was pretreated
43
44 with dil. sulfuric acid 0.75% (W/W) at 158°C and 0.55 MPa with a residence time of 10 min.
45
46 Subsequently, the slurry was centrifuged to fractionate solid and liquids, where the solid
47
48 fraction rich in celluloses was washed with 3X water and pH adjusted between 5.0 and 6.0 prior
49
50 to enzymatic hydrolysis²⁴⁻²⁵. On the other hand, the liquid fraction containing hemicelluloses
51
52
53
54
55
56
57
58
59
60

1
2
3 and dissolved solids was detoxified by addition of $\text{Ca}(\text{OH})_2$ and adjusted to 6.00 pH. The calcium
4 sulphate (gypsum) precipitating as a byproduct was recovered using hydrocyclones and vacuum
5
6 filtration.
7
8
9

10 After gypsum separation, the liquid and solid streams were combined, and cellulase was added
11 at the manufacturer recommended rate of 20 mg protein/ g glucan. Surfactants were added at
12 an appropriate concentration based on the treatment simulated. Enzymatic hydrolysis was
13 performed at 50°C, while fermentation was conducted at 30°C. The techno-economic analysis
14 was based on a retention time of 72 hr for enzymatic hydrolysis process and 48 hr for
15 fermentation (120 hrs total). . The glucose, ethanol yield and conversion rates of different trials
16 used were reported in S2:TableS2-S2. Once enzymatic hydrolysis is complete, yeast and
17 diammonium phosphate (nitrogen source) were added to the process. Separate hydrolysis and
18 fermentation (SHF) was employed as the process configuration for all trials. Ethanol was
19 recovered using in three distillation columns (Feed concentration to 93% ethanol), followed by
20 dehydration in molecular sieves (93% to 99.5% anhydrous ethanol) to remove residual
21 moisture¹⁸. Ethanol is denatured using 1% gasoline and sold as the main product. The lignin
22 residues from the bottoms of the distillation columns are used in the boiler for steam
23 generation and subsequently electricity production. The boiler operates at 10% excess oxygen
24 where steam is produced at 257°C and 4.5MPa²⁶. The flue gas exits the boiler at 200°C and
25 steam expansion results in electricity production. The wastewaters from different sources are
26 treated using different technologies including anaerobic digestion, aerobic oxidation and belt
27 filtration.
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Economic analysis and assumptions

The plant was designed to process 60,000 dry MT Banagrass/year based on the available land to produce the feedstock on Maui Island. The plant has a lifetime of 20 years with an annual operational time of 7920h. The list of economic assumptions used in this study is tabulated in Table 2. Discount rate for the project was 4%, and corporate taxes were maintained with federal standards at 40%. The price of the utilities was based on the previous literatures^{1, 18, 27}. The construction period of the plant was assumed 24 months with a start-up time of six months.

Life cycle assessments

Goal, scope, system boundaries and allocation procedure

The primary goal for the LCA was to conduct a cradle-to-gate life cycle inventory and estimate environmental impacts based on the experimental results to determine the process path with lowest environmental impacts. One MJ Ethanol was used as a functional unit in this study. The LCA system boundary (Figure S2-S2) includes farming practices including fertilizers, agricultural machinery, electricity, harvest, water, and transportation as a part of the Banagrass production. Coproducts such as electricity and gypsum were considered avoided products. System expansion was used to avoid allocation and co-products considerations as per the ISO 14044 (2006) standards²⁸.

Life cycle inventory

The data for the life cycle inventory such as process throughput information including raw material consumption and product yields were obtained from the TEA models. Yeast production process was added separately based on Dunn et al²⁹. Feedstock production details such as irrigation data, harvesting, emissions and crop yield were obtained from pilot trials

1
2
3 conducted in Hawaii. All these data were integrated and analysed using Ecoinvent 3.1 database
4
5 and life cycle impact assessment was conducted on these integrated processes.
6
7

8 **Life cycle impact assessment**

9
10 TRACI 2.1³⁰ was used to evaluate LCIA that includes seven environmental indicators including
11
12 acidification, ecotoxicity, eutrophication, global warming, ozone depletion, photochemical
13
14 ozone formation (POF), resource depletion – fossil fuels, while the remaining three are human
15
16 health-related including carcinogenics, noncarcinogenics and respiratory effects. The summary
17
18 of all process inputs and outputs can be accessed from the supplementary files (S1) using Open
19
20 LCA with Ecoinvent 3.1 database.
21
22
23
24
25

26 **Sensitivity analysis**

27
28 Since the approach adopted in this work requires use of early stage TEA which often require
29
30 estimation of estimated parameters due to limited information a detailed sensitivity analysis
31
32 was conducted to identify the process parameters that have the greatest impact on the TEA
33
34 results. Impact of $\pm 20\%$ variations in parameters such as ethanol price, capacity, enzyme
35
36 amount and price, feedstock price, surfactant price on the overall TEA results were assessed.
37
38 Sensitivity analysis for LCA results was conducted using a Monte-Carlo simulation method
39
40 consisting of 100 independently sampled runs in OpenLCA software.
41
42
43
44
45
46

47 **Results and Discussion**

48 **Effect of surfactants on enzymatic hydrolysis and ethanol production**

49
50 Pretreated biomass at a solid loading of 20% was used to investigate the effect of surfactants at
51
52 four concentrations 0% (control), 2%, 5% and 8% (w surfactant /w biomass). The statistical
53
54
55
56
57
58
59
60

1
2
3 analysis using ANOVA-General model did not show a significant difference in glucose
4 concentrations for different types of surfactant (P-value >0.05) but there was a significant
5 differences (P-value <0.05) between different concentrations of surfactants for the glucose
6 release (S3). These results indicate that while the addition of surfactant has a positive effect on
7 the glucose release, the results are insensitive to the type of the PEG surfactant used (S4).

8
9
10
11
12
13
14
15 After 96h of enzymatic hydrolysis at a level of 2% surfactant, the glucose concentration was
16 119.2±5.4 g/L for PEG 6000 which was 22.6% higher compared to the control. At a level of 5%
17 surfactant, the highest glucose concentration was 126.9±1.9 g/L using PEG 8000 and
18 represented a 0.06 % increase compared to 2% PEG 6000 results. Similarly, Tween 80 had a
19 glucose concentration of 127.1±5.2 g/L at 8% surfactant and was 0.07 % higher compared to 2%
20 of PEG 6000 (FigureS2-S3). It was obvious that it would not be profitable to use a surfactant
21 >2% as the increase in glucose revenues are less than the additional surfactant price
22 (S2:FigureS2-S6).

23
24
25
26
27
28
29
30
31
32
33
34
35 Ethanol produced from fermentation followed a similar trend. Ethanol concentrations
36 significantly increased (P<0.05) with an increase in the concentration of surfactant. Like the
37 glucose concentrations, surfactants type did not show a significant effect (P-value>0.05) on
38 ethanol concentration (S3). In addition, the statistical analysis did not show a significant
39 interaction effect between the surfactant type and surfactant concentration on the resulting
40 ethanol. This result indicates that the performance of the surfactants were not significantly
41 different at similar concentrations. PEG4000 and PEG6000 at 2% had ethanol concentrations of
42 55.6±3.9 g/L and 55.0±5.8 g/L (Figure 2). Ethanol concentrations were 40% and 39% higher
43 compared to control (39.6±3.4 g/L) using PEG4000 and PEG 6000 indicating that the addition of
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 surfactant had a positive effect on ethanol production. At a level of 5% surfactant, the ethanol
4
5 concentration was 57.1 ± 2.7 g/L using PEG6000, which represents a 3.8% increment compared
6
7 to ethanol concentration at 2% of PEG6000. Ethanol concentration of 57.3 ± 4.6 g/L and 57.1 ± 6.1
8
9 g/L were obtained using tween80 and PEG6000 at 8% levels which represents an increment of
10
11 4.2% compared to ethanol concentration at 2% of PEG 6000.
12
13
14
15

16 Given the results of hydrolysis and fermentation process, the positive effect of surfactants
17
18 becomes even more enhanced during the fermentation process (40% fermentation
19
20 enhancement compared to 22.6% hydrolysis enhancement). High glucose concentrations
21
22 (>50g/L) inhibit yeast activity since the hypertonic environment adversely affects yeast
23
24 viability³⁰, and the use of surfactants reduce the inhibitory effect on both hydrolysis and
25
26 fermentation processes. Polyethylene glycol provides exo-protection for the fermentation
27
28 yeast, boosts its viability and highly enhances yeast tolerance to toxic components³¹. In
29
30 addition, polyethylene glycol is an effective bactericide and thus reduces bacterial populations
31
32 that could compete with yeast for glucose³².
33
34
35
36
37
38

39 Though the higher concentration of surfactant yielded higher glucose concentration and
40
41 ethanol production, using a high concentration of surfactant could be detrimental when used in
42
43 industrial scale due to its relatively high price (\$1500-2300/MT). Therefore, based on the
44
45 experimental results and the statistical analysis 2% PEG 6000 was selected for the preliminary
46
47 economic feasibility analysis (S2:FigureS2-S6).
48
49
50

51 Eriksson, et al.¹⁰ reported an overall conversion of 80%, while this study had a overall
52
53 conversion rate of 81.5% using 2% PEG6000, and a conversion rate of 84.6 % using 5%
54
55
56
57
58
59
60

1
2
3 PEG6000. Finally, two of the highest conversion rates of 84.9 and 84.7% were obtained at 8%
4
5 level of surfactant using Tween80 and PEG6000 respectively. Other studies also reported the
6
7 conversion rate between 75-87% using different surfactants such as PEG 400 , PEG 1500 ,PEG
8
9 3000 , PEG 4000 , PEG 6000 and PEG 8000 using 1%, 2%, and 5 % PEG concentration and
10
11 were typically conducted at 10% biomass loading compared to 20% in the current study^{13, 7}.
12
13
14
15

16 **Preliminary economic feasibility analysis**

17
18 A preliminary techno-economic analysis was carried out comparing control and PEG 6000 at 2%
19
20 for ethanol production in a plant with feedstock processing capacity of 60,000 dry MT/year. The
21
22 overall mass balance and bulk flows are shown in S2: Figure S2-S4. At 19,042 MT/year ethanol,
23
24 a 2% w/w PEG 6000 addition produced an additional 5000 MT compared to control. While the
25
26 differences in capital cost between control (\$45.5M) and PEG 6000 at 2% (\$46.0 M) was \$0.5 M,
27
28 the operational costs were \$2.6M higher for PEG 2% w/w and were primarily attributable to the
29
30 PEG 6000 price. Overall, PEG 6000 at 2% led to an increase in revenues from \$14.5 M for
31
32 control to \$19.0 M (Figure 2A). PEG 6000 addition at 2% w/w clearly outperformed control on
33
34 all profitability indexes including ROI -0.87% (control) and 3.29% (PEG 6000) respectively (Figure
35
36 2B). This shows that addition of PEG 6000 could be beneficial for second-generation ethanol
37
38 production process.
39
40
41
42
43
44

45 Concentrations higher than 2% of PEG 6000, i.e., 5% and 8% were also included in the
46
47 preliminary TEA since they have higher ethanol yields. For 5% PEG concentrations, 19,220
48
49 MT/year ethanol was produced followed by 19,503 MT/year for 8% PEG concentration (S2:
50
51 Figure S2-S4). Although more ethanol was produced with increasing PEG concentrations, the
52
53 operating costs also increased with increasing usage of PEG. Higher OPEX increased production
54
55
56
57
58
59
60

1
2
3 cost, which in turn reduced the return on investment. Therefore, compared to control, PEG
4
5 concentrations >2% were not economically profitable. The production cost of control was
6
7 \$1.33/kg for 2% PEG, while PEG concentrations >2% yielded a production cost between \$1.34-
8
9 1.50/kg (Figure 2B). Hence, PEG concentrations >2% were not considered for any further
10
11 analysis. However, further evidence is needed and explore the possibility of reducing the PEG
12
13 6000 addition and achieving higher overall profitability. Therefore, a second set of experiments
14
15 were conducted to optimize the surfactant concentration.
16
17
18
19
20
21
22

23 **Optimizing surfactant concentrations**

24
25 The second set of experiments were performed in the laboratory at reduced concentrations
26
27 ($\leq 1\%$) on PEG 6000 to optimize the ethanol production and assess the improvements to overall
28
29 economic and environmental impacts of the process. Enzymatic hydrolysis and fermentation
30
31 experiments were performed at four concentrations of PEG 6000 i.e., 0% (control), 0.25%,
32
33 0.5%, 0.75% and 1%. It was observed in the first set of experiments that most of the glucose
34
35 was released in the first 72h. Since a reduction in reaction time will reduce the reactor volume
36
37 benefitting the CAPEX and OPEX, the fermentation time was reduced from 96hours to 72 hours
38
39 in the second set of experiments. The peak glucose concentrations ranged between 92.7 – 97.5
40
41 g/L depending on the concentration of PEG. The highest glucose release was reached with 1%
42
43 concentration of PEG 6000 at 97.5 ± 4.9 g/L (S2:FigureS2-S5). After 72h, active dry yeast was
44
45 added to initiate fermentation for ethanol production. Ethanol production peaked at 72 hours
46
47 after yeast inoculation, at 40.1 – 42.5 g/L, at various concentrations of PEG. PEG 6000 at 1% had
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 the highest ethanol production of 42.5 ± 1.4 g/L with an increment of 10.1% compared to the
4
5 control (0 % PEG 6000)

6
7
8 (S2:FigureS2-S5). It was interesting to note that the glucose concentrations at PEG 6000
9
10 concentrations $<1\%$ were not significant different (one-way ANOVA) but the ethanol
11
12 concentrations were significantly different compared to control (S3 and S4). Progressive
13
14 hydrolysis during the fermentation process increases the available glucose concentration in the
15
16 fermentation broth in addition to the accumulated effect of PEG on the enzymatic hydrolysis
17
18 process and the fermentation process. However, using two-sample T-test, only PEG6000 1%
19
20 differs statistically than PEG6000 0% (control) indicating that low PEG concentrations did not
21
22 enhance the fermentation.
23
24
25

26
27 Based on the results of the experiments and the statistical analysis (S2:FigureS2-S6), the
28
29 profitability of these scenarios was assessed by comparing the techno-economic analysis results
30
31 for PEG concentrations in the range of 0.0% to 2.0%.
32
33
34

35 **Detailed techno-economic analysis**

36
37 It was evident from the first round of TEA conducted for higher concentrations (0, 2, 5 and 8%)
38
39 that PEG at 2% that addition of PEG had a positive effect on economics. To assess the optimality
40
41 of the 2% PEG 6000 concentration, further TEA was performed for concentrations $\leq 1\%$ of PEG
42
43 6000. The CAPEX for $\leq 1\%$ of PEG 6000 concentrations was $\sim \$45.5$ M compared to $\$46$ M for 2%
44
45 PEG (Figure 2A). The OPEX had a similar decreasing trend with the decrease in the PEG
46
47 concentration. The annual ethanol production increased with the increase in PEG concentration
48
49 and profitability of the plant was directly proportional to PEG concentration (S2: Figure S2-S4).
50
51 The ethanol production cost for PEG 6000 concentrations $\leq 1\%$ varied between $\$0.99 - 1.06$ /L
52
53
54
55
56
57
58
59
60

1
2
3 and the production cost decreased with an increase in PEG concentration due to higher
4 revenues from increased ethanol production. The production cost for 2% PEG was \$0.88/L,
5 which was \$0.11 lower than production cost at 1% PEG. The production cost of other reported
6 studies (without PEG addition) were in the range between \$0.6 - 1.2/L, which was comparable
7 to the production costs reported in this study^{1, 18, 31-32}. Compared with control (\$14.5 M), 1%
8 PEG (\$16.3 M) resulted in \$1.8 M additional revenue while the operational costs under similar
9 conditions increased by \$1.2 M, resulting in \$0.6M net revenue increase. The ROI for control 1%
10 and 2% PEG were -0.87%, 0.25% and 3.29% respectively.
11
12

13 Use of 200-1400MT/year of PEG 6000 at various concentrations (0.25-2.0%) for the 60,000 MT
14 biomass/year plant was major contributor to the raw materials prices. (S2:TableS2-S3). The
15 utilities including electricity, cooling water, steam etc. for different scenarios are tabulated in
16 S2:TableS2-S4. Comprehensive mass and energy balance reports including detailed economic
17 and profitability analysis reports reported here can be generated using the model files provided
18 as supplementary files (S1). A part of the high-pressure steam (19.5%) produced in the boiler
19 from lignin and other solids was used in the pretreatment reactor while the rest was utilized for
20 electricity generation through turbines. The net electricity generation after consumption for the
21 control and 2% PEG 6000 was 7166 and 4569 MWh/year, respectively. The differences in steam
22 and electricity production are attributable to the differences in the energy production as the
23 energy consumption in all scenarios was similar. This is a direct result of higher efficiencies of
24 cellulose conversion at higher PEG additions resulting in lower amount of hydrolysis and
25 fermentation residues, which are used as feedstock for the steam boiler.
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Life cycle assessments

The mass and energy balance information from the techno-economic analysis including control, 0.25%, 0.50%, 0.75%, 1.0% and 2.0% PEG 6000 were used in life cycle assessments. A decreasing trend was observed for all environmental impacts with the increase in the PEG concentration (S2:FigureS2-S7) and is a result of increased ethanol production with increased PEG addition. Compared to control (-2 gCO₂/MJ), 2% PEG (-8 gCO₂/MJ) had reduced the global warming potential by 6 g/MJ ethanol produced (Table3). PEG 6000 concentrations ≤1% had a GWP between -2 and -4 gCO₂/MJ. GREET reported a GWP of 30.8 gCO₂ eq./MJ using corn stover as a substrate for ethanol production³³. The lower GWP for control could be mainly attributed the larger amount of higher impact electricity mix displaced in Maui compared to the lower amounts of US continental electricity mix used in GREET. Other studies reported were in the range between 24 and 50 gCO₂/MJ³⁴⁻³⁵. Other environmental impacts including acidification, eutrophication etc. followed a similar trend and 2% PEG had the lowest environmental impacts. These results indicate that 2% PEG was both economically viable and environmentally sustainable.

Analysis of collective data

All the data from the two-experiments performed, techno-economic evaluations and LCA were analyzed to find the best possible combination. The preliminary experiments, which were based on the literature, showed that 2% PEG concentration was the optimal option despite having lower final ethanol concentrations. Using 5% or 8% concentrations worsened the economic feasibility of ethanol production compared to 2% of the surfactant addition demonstrating that

1
2
3 addition of surfactant needs to be optimized for economically optimal results rather than using
4
5 conditions for higher ethanol titers (8% had highest ethanol concentration). The prefeasibility
6
7 analysis gave an insight on profitability and served as a basis for designing the second set of
8
9 experiments to optimize the concentration of PEG. The second set of experiments and the
10
11 economic analysis indicated that the PEG additions were directly proportional to the economic
12
13 feasibility until 2% and increasing it further decreased the profitability. Life cycle assessments
14
15 were also revealed a similar trend and a collective analysis of laboratory, techno-economic and
16
17 LCA perspectives showed that 2% PEG 6000 is the recommended option.
18
19
20
21

22 **Sensitivity analysis**

23
24
25 The TEA sensitivity on PEG 6000 at 2% concentration showed that ethanol price followed by the
26
27 plant size were two most significant factors (S2:FigureS2-S8). Using 2% PEG6000 addition as a
28
29 base case, increasing the ethanol price by 20% increased the ROI to 10.65% compared to 3.78%
30
31 ROI for base case. Variation of surfactant and enzyme price did not have a significant effect on
32
33 the ROI. Sensitivity analysis of LCA Datasets (S2: Table 5) was conducted for the 2% PEG case.
34
35 All inputs to the bioethanol process (Biomass, cellulase enzymes, yeast, phosphate fertilizers,
36
37 lime, sulphuric acid and water) were assumed to vary according to a normal distribution with a
38
39 standard deviation equal to 10% of the mean value. The mean value was the same as the 2%
40
41 PEG scenario described earlier. Monte Carlo analysis indicated that there were large variations
42
43 (>100% mean value) for all the LCIA metrics indicating the extreme sensitivity of the results to
44
45 the variation in the inputs to the process.
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Conclusion

This study was implemented to determine the economically viable and environmentally lower impactful process for addition various surfactant molecules (PEG 3000, 4000, 6000, 8000 and Tween 80) at various concentrations (0-8%) to enhance enzymatic hydrolysis of pretreated Banagrass for sugar release and subsequently, ethanol production. Of the tested surfactants, PEG 6000 was determined to be the optimal surfactant and economic analysis indicated that PEG addition at 2% concentration was the most optimal option with an ROI of 3.29%. Increasing or decreasing PEG 6000 concentration beyond the 2% adversely impacts the economic feasibility. Environmental impacts including global warming potential, acidification and eutrophication potentials all decreased linearly with addition of PEG 6000 up to 2% concentration. Based on the integrated experimental, techno-economic and life cycle assessments, 2% PEG 6000 addition was found to be technically feasible, economically viable and environmentally less impactful pathway for ethanol production from Banagrass.

Acknowledgements

Funding from US Department of Agriculture through the Biomass Research and Development Initiative with the grant number USDA-NIFA-9008-003540 is gratefully acknowledged.

Authors Contribution

Haider Jawad Kadhum, and Karthik Rajendran had equally contributed to this manuscript. They conducted the experiments, performed the techno-economic analysis and life cycle assessment and wrote the manuscript. Ganti S Murthy directed the research, reviewed results, provided

critical feedback, performed LCA sensitivity analysis, helped in data analysis, edited and revised the manuscript. All authors read and approved the final manuscript.

Supporting Information

Supplementary 1 (S1): This SuperPro models and LCA model files can be accessed with the freely available demo version (<http://www.intelligen.com/>), Ecoinvent database and OpenLCA (<http://www.openlca.org/>).

Supplementary 2 (S2): This file includes all the schematics, system boundary, glucose, ethanol production, raw material and utilities consumption.

Supplementary 3 (S3): This file contains the statistical analysis used in this work.

Supplementary 4 (S4): All the raw data of this work can be accessed from this excel file.

References:

1. Kumar, D.; Murthy, G. S., Impact of pretreatment and downstream processing technologies on economics and energy in cellulosic ethanol production. *Biotechnol. Biofuels* **2011**, *4* (1), 27, DOI:10.1186/1754-6834-4-27.
2. Kumar, D.; Murthy, G. S., Development and validation of a stochastic molecular model of cellulose hydrolysis by action of multiple cellulase enzymes. *Bioresources and Bioprocessing* **2017**, *4* (1), 54, DOI:10.1186/s40643-017-0184-2.
3. Li, J.; Li, S.; Fan, C.; Yan, Z., The mechanism of poly (ethylene glycol) 4000 effect on enzymatic hydrolysis of lignocellulose. *Colloids Surf. B. Biointerfaces* **2012**, *89*, 203-210, DOI: 10.1016/j.colsurfb.2011.09.019.
4. Börjesson, J.; Engqvist, M.; Sipos, B.; Tjerneld, F., Effect of poly (ethylene glycol) on enzymatic hydrolysis and adsorption of cellulase enzymes to pretreated lignocellulose. *Enzyme Microb. Technol.* **2007**, *41* (1), 186-195, DOI:10.1016/j.enzmictec.2007.01.003.
5. Eriksson, T.; Börjesson, J.; Tjerneld, F., Mechanism of surfactant effect in enzymatic hydrolysis of lignocellulose. *Enzyme Microb. Technol.* **2002**, *31* (3), 353-364, DOI:10.1016/S0141-0229(02)00134-5
6. Börjesson, J.; Peterson, R.; Tjerneld, F., Enhanced enzymatic conversion of softwood lignocellulose by poly (ethylene glycol) addition. *Enzyme Microb. Technol.* **2007**, *40* (4), 754-762, DOI: 10.1016/j.enzmictec.2006.06.006

- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10
 - 11
 - 12
 - 13
 - 14
 - 15
 - 16
 - 17
 - 18
 - 19
 - 20
 - 21
 - 22
 - 23
 - 24
 - 25
 - 26
 - 27
 - 28
 - 29
 - 30
 - 31
 - 32
 - 33
 - 34
 - 35
 - 36
 - 37
 - 38
 - 39
 - 40
 - 41
 - 42
 - 43
 - 44
 - 45
 - 46
 - 47
 - 48
 - 49
 - 50
 - 51
 - 52
 - 53
 - 54
 - 55
 - 56
 - 57
 - 58
 - 59
 - 60
7. Chia-wen, C. H.; Cannella, D.; Jørgensen, H.; Felby, C.; Thygesen, L. G., Cellobiohydrolase and endoglucanase respond differently to surfactants during the hydrolysis of cellulose. *Biotechnol. Biofuels* **2015**, *8* (1), 52, DOI:10.1186/s13068-015-0242-y.
8. Pardo, A. G., Effect of surfactants on cellulase production by *Nectria catalinensis*. *Curr. Microbiol.* **1996**, *33* (4), 275-278, DOI: 10.1007/s002849900113
9. Qing, Q.; Yang, B.; Wyman, C. E., Impact of surfactants on pretreatment of corn stover. *Bioresour. Technol.* **2010**, *101* (15), 5941-5951, DOI: 10.1016/j.biortech.2010.03.003.
10. ICIS pricing PEG 6000 cost. www.icispricing.com.
11. Rajendran, K.; Drielak, E.; Varma, V. S.; Muthusamy, S.; Kumar, G., Updates on the pretreatment of lignocellulosic feedstocks for bioenergy production—a review. *Biomass Conversion and Biorefinery* **2018**, *8* (2), 471–483, DOI:10.1007/s13399-017-0269-3.
12. Berman, B., *From ideas to assets: Investing wisely in intellectual property*. John Wiley & Sons: 2002; Vol. 29.
13. Chesbrough, H., *Open business models: How to thrive in the new innovation landscape*. Harvard Business Press: 2006.
14. Kalakul, S.; Malakul, P.; Siemanond, K.; Gani, R., Integration of life cycle assessment software with tools for economic and sustainability analyses and process simulation for sustainable process design. *Journal of Cleaner Production* **2014**, *71* (Supplement C), 98-109, DOI:10.1016/j.jclepro.2014.01.022
15. Sluiter, A.; Hames, B.; Ruiz, R.; Scarlata, C.; Sluiter, J.; Templeton, D. *Determination of ash in biomass*; NREL: Golden, CO, 2008.
16. Sluiter, A.; Hames, B.; Ruiz, R.; Scarlata, C.; Sluiter, J.; Templeton, D.; Crocker, D. *Determination of structural carbohydrates and lignin in biomass.*; National Renewable Energy Laboratory (NREL): Colorado, USA, 2008.
17. Sluiter, A.; Hames, B.; Ruiz, R.; Scarlata, C.; Sluiter, J.; Templeton, D.; Crocker, D. *Determination of structural carbohydrates and lignin in biomass.*; National Renewable Energy Laboratory (NREL): Colorado, USA, 2012.
18. Kadhum, H. J.; Rajendran, K.; Murthy, G. S., Effect of solids loading on ethanol production: Experimental, Economic and Environmental analysis. *Bioresour. Technol.* **2017**, *244* (1), 108-116, DOI: 10.1016/j.biortech.2017.07.047.
19. Bare, J. C., Traci Tool for the Reduction and Assessment of Chemical and other Environmental Impacts. *J Ind Ecol* **2002**, *6* (3-4), 49-78, DOI: 10.1162/108819802766269539.
20. Bare, J.; Young, D.; QAM, S.; Hopton, M.; Chief, S., Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI). *US Environmental Protection Agency, Washington, DC* **2012**.
21. Bare, J., TRACI 2.0: the tool for the reduction and assessment of chemical and other environmental impacts 2.0. *Clean Technol. Envir.* **2011**, *13* (5), 687-696. DOI: 10.1007/s10098-010-0338-9
22. Humbird, D.; Davis, R.; Tao, L.; Kinchin, C.; Hsu, D.; Aden, A.; Schoen, P.; Lukas, J.; Olthof, B.; Worley, M. *Process design and economics for biochemical conversion of lignocellulosic biomass to ethanol: dilute-acid pretreatment and enzymatic hydrolysis of corn stover*; National Renewable Energy Laboratory (NREL), Golden, CO.: **2011**, DOI: 10.2172/1013269

- 1
2
3 23. Rajendran, K.; Murthy, G. S., How does technology pathway choice influence economic
4 viability and environmental impacts of lignocellulosic biorefineries? *Biotechnol. Biofuels* **2017**,
5 *10* (1), 268,DOI: 10.1186/s13068-017-0959-x
6
7 24. Rajan, K.; Carrier, D. J., Effect of dilute acid pretreatment conditions and washing on the
8 production of inhibitors and on recovery of sugars during wheat straw enzymatic hydrolysis.
9 *Biomass Bioenerg.* **2014**, *62*, 222-227,DOI: 10.1016/j.biombioe.2014.01.013.
10
11 25. Frederick, N.; Zhang, N.; Ge, X.; Xu, J.; Pelkki, M.; Martin, E.; Carrier, D. J., Poplar
12 (*Populus deltoides* L.): The effect of washing pretreated biomass on enzymatic hydrolysis and
13 fermentation to ethanol. *ACS Sustainable Chem. Eng.* **2014**, *2* (7), 1835-1842,
14 DOI: 10.1021/sc500188s.
15
16 26. Mandegari, M. A.; Farzad, S.; Görgens, J. F., Economic and environmental assessment of
17 cellulosic ethanol production scenarios annexed to a typical sugar mill. *Bioresour. Technol.*
18 **2017**, *224*, 314-326,DOI: 10.1016/j.biortech.2016.10.074.
19
20 27. Kazi, F. K.; Fortman, J. A.; Anex, R. P.; Hsu, D. D.; Aden, A.; Dutta, A.; Kothandaraman, G.,
21 Techno-economic comparison of process technologies for biochemical ethanol production from
22 corn stover. *Fuel* **2010**, *89*, S20-S28,DOI: 10.1016/j.fuel.2010.01.001
23
24 28. ISO Technical Committee, *Environmental Management: Life Cycle Assessment:
25 Requirements and Guidelines*. ISO: 2006.
26
27 29. Dunn, J. B.; Mueller, S.; Wang, M.; Han, J., Energy consumption and greenhouse gas
28 emissions from enzyme and yeast manufacture for corn and cellulosic ethanol production.
29 *Biotechnol. Lett* **2012**, *34* (12), 2259-2263,DOI 10.1007/s10529-012-1057-6.
30
31 30. Zhang, Q.; Wu, D.; Lin, Y.; Wang, X.; Kong, H.; Tanaka, S., Substrate and product
32 inhibition on yeast performance in ethanol fermentation. *Energy & Fuels* **2015**, *29* (2), 1019-
33 1027,DOI: 10.1021/ef502349v
34
35 31. Gnansounou, E.; Dauriat, A., Techno-economic analysis of lignocellulosic ethanol: a
36 review. *Bioresour. Technol.* **2010**, *101* (13), 4980-4991,DOI:10.1016/B978-0-12-385099-
37 7.00006-1.
38
39 32. Wingren, A.; Galbe, M.; Zacchi, G., Techno-economic evaluation of producing ethanol
40 from softwood: Comparison of SSF and SHF and identification of bottlenecks. *Biotechnol. Progr.*
41 **2003**, *19* (4), 1109-1117,DOI:10.1021/bp0340180.
42
43 33. GREET, GREET Life Cycle Model. Argonne National Laboratory: Argonne, IL, 2016.
44
45 34. Luo, L.; Van der Voet, E.; Huppes, G.; De Haes, H. A. U., Allocation issues in LCA
46 methodology: a case study of corn stover-based fuel ethanol. *Int. J. Life Cycle Ass.* **2009**, *14* (6),
47 529-539, DOI:10.1007/s11367-009-0112-6.
48
49 35. Cavalett, O.; Chagas, M. F.; Seabra, J. E.; Bonomi, A., Comparative LCA of ethanol versus
50 gasoline in Brazil using different LCIA methods. *Int. J. Life Cycle Ass.* **2013**, *18* (3), 647-658, DOI:
51 10.1007/s11367-012-0465-0.
52
53
54
55
56
57
58
59
60

List of figures:

Figure 1. Schematics of introducing TEA and LCA as decision-making tools for bio-energy/chemicals production

Figure 2. Different economic indexes for various concentration of PEG6000. (A) Investments, operating costs, and revenues in million dollars. (B) Unit production cost in \$/kg and Return on investment in percentage.

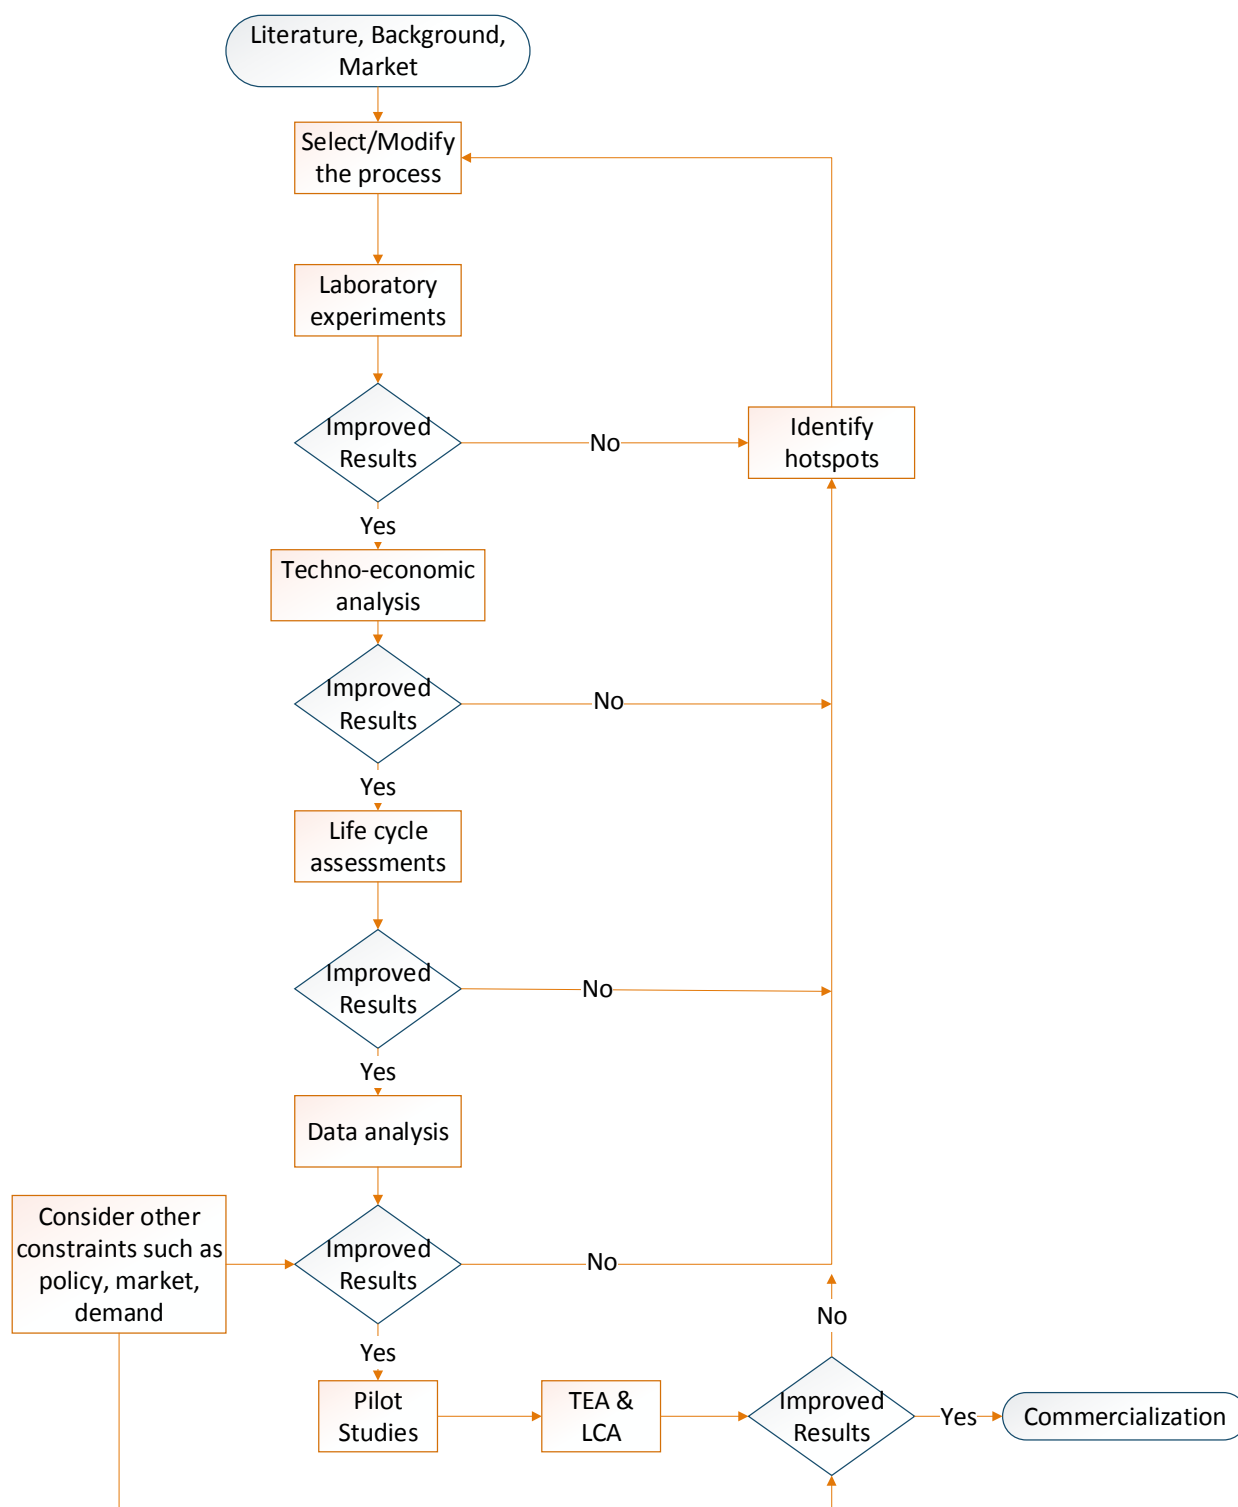


Figure 1. Schematics of introducing TEA and LCA as decision-making tools for bio-energy/chemicals production



Figure 2. Different economic indexes for various concentration of PEG6000. (A) Investments, operating costs, and revenues in million dollars. (B) Unit production cost in \$/kg and Return on investment in percentage.


Table 1. List of assumptions used in this study.

Type	Assumption
Capacity	60,000 dry MT/year
Biomass price	\$80/ dry MT
Gypsum price	\$30/MT
PEG 6000	\$1800/MT
Ethanol price	\$0.95/kg
Enzymes price	\$0.517/kg
Sulfuric acid price	\$35/MT
Electricity price	\$0.07/kW-h
Gasoline price	\$0.8/kg
Discount rate	4% (2, 4 and 6%)
Annual hours	7920 h
Depreciation method	Straight line
Salvage value	5%
Depreciation years	10 years

Table 2. Overall summary of experimental, techno-economic and life cycle assessments.

	Experimental analysis								Life cycle assessment										
	Concentration	Surfactant Type	Glucose	Ethanol	Gypsum	Energy	Ethanol	Cost	Acidification	Ecotoxicity	Eutrophication	Global Warming	Carcinogenics	Non-carcinogenics	Ozone Depletion	Photochemical ozone formation	Resource depletion - fossil fuels	Respiratory effects	
		(g/L)	(g/L)	MT/yr	MWh/yr	MT/yr	\$/kg	kg SO ₂	CTUe	kg N	kg CO ₂ eq				kg CFC-11	kg O ₃	MJ surplus	kg PM _{2.5}	
First Experiment	0%	Control	97.24	39.63	3932	7166	14150	\$ 1.34	0.00067	0.22107	0.00013	-	2.03E-09	9.82E-09	1.01E-08	0.005	0.12985	7.56E-05	
		Tween80	106.30	51.53															
		PEG3000	107.14	50.96															
	2%	PEG4000	107.31	55.60															
		PEG6000	119.17	54.97	3970	4569	19042	\$ 1.13	0.00053	0.18756	1.10E-04	-8.96E-03	1.76E-09	8.32E-09	8.35E-09	4.09E-03	1.19E-01	5.99E-05	
		PEG8000	113.42	50.36															
		Tween80	107.32	49.44															
		PEG3000	110.65	49.48															
	5%	PEG4000	116.97	53.86															
		PEG6000	123.89	57.06	3974	4626	19220	\$ 1.33											
		PEG8000	126.92	53.92															
		Tween80	127.14	57.29															
		PEG3000	121.21	53.04															
	8%	PEG4000	125.80	56.93															
		PEG6000	118.02	57.10	3978	4342	19503	\$ 1.50											
		PEG8000	121.05	53.82															

1																				
2																				
3																				
4	Second experiment*	0.25%		92.66	40.13	3938	7054	14428	\$	1.34	0.00066	0.22031	0.00013	-2.08E-03	2.03E-09	9.78E-09	9.99E-09	0.00495	1.31E-01	7.47E-05
5		0.50%	PEG	89.22	40.81	3944	6822	14920	\$	1.32	0.00064	0.21666	0.00013	-2.54E-03	2.00E-09	9.62E-09	9.77E-09	0.00485	1.30E-01	7.28E-05
6			6000						\$											
7		0.75%		92.08	40.68	3949	6657	15277	\$	1.31	0.00063	0.215	0.00013	0.00259	1.99E-09	9.54E-09	9.63E-09	4.79E-03	0.1299	7.16E-05
8									\$			2.08E-01	1.20E-04	-4.05E-03	1.93E-09	9.22E-09	9.29E-09	4.61E-03		6.86E-05
9		1%		98.69	42.49	3956	6243	16089	\$	1.26	0.00061								0.12688	05

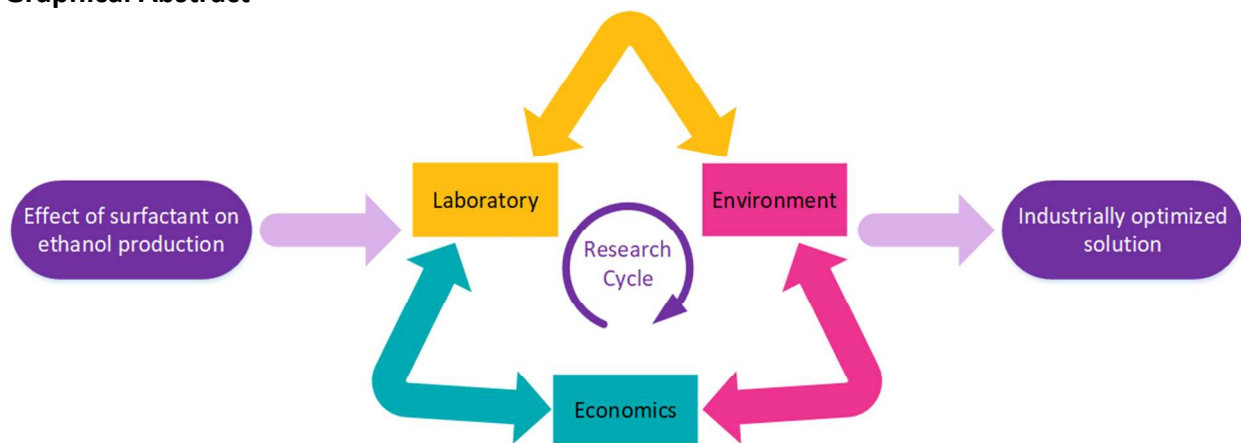Graphical Abstract**Synopsis:**

A case study of using integrated techno-economic and Life cycle assessments as tools to identify hotspots and optimize bioprocess design